



**\*CONTACT CBP FOR UL CERTIFICATION AND OTHER BALLSITIC LEVELS**

# GP4 **BULLET RESISTANT GUN-PORT (WALL MOUNT)**

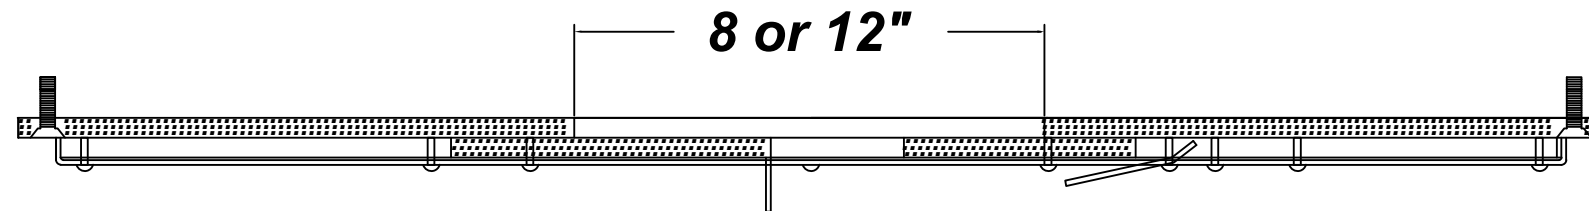

**Sectional Plan View  
(Shown Partially Open)**

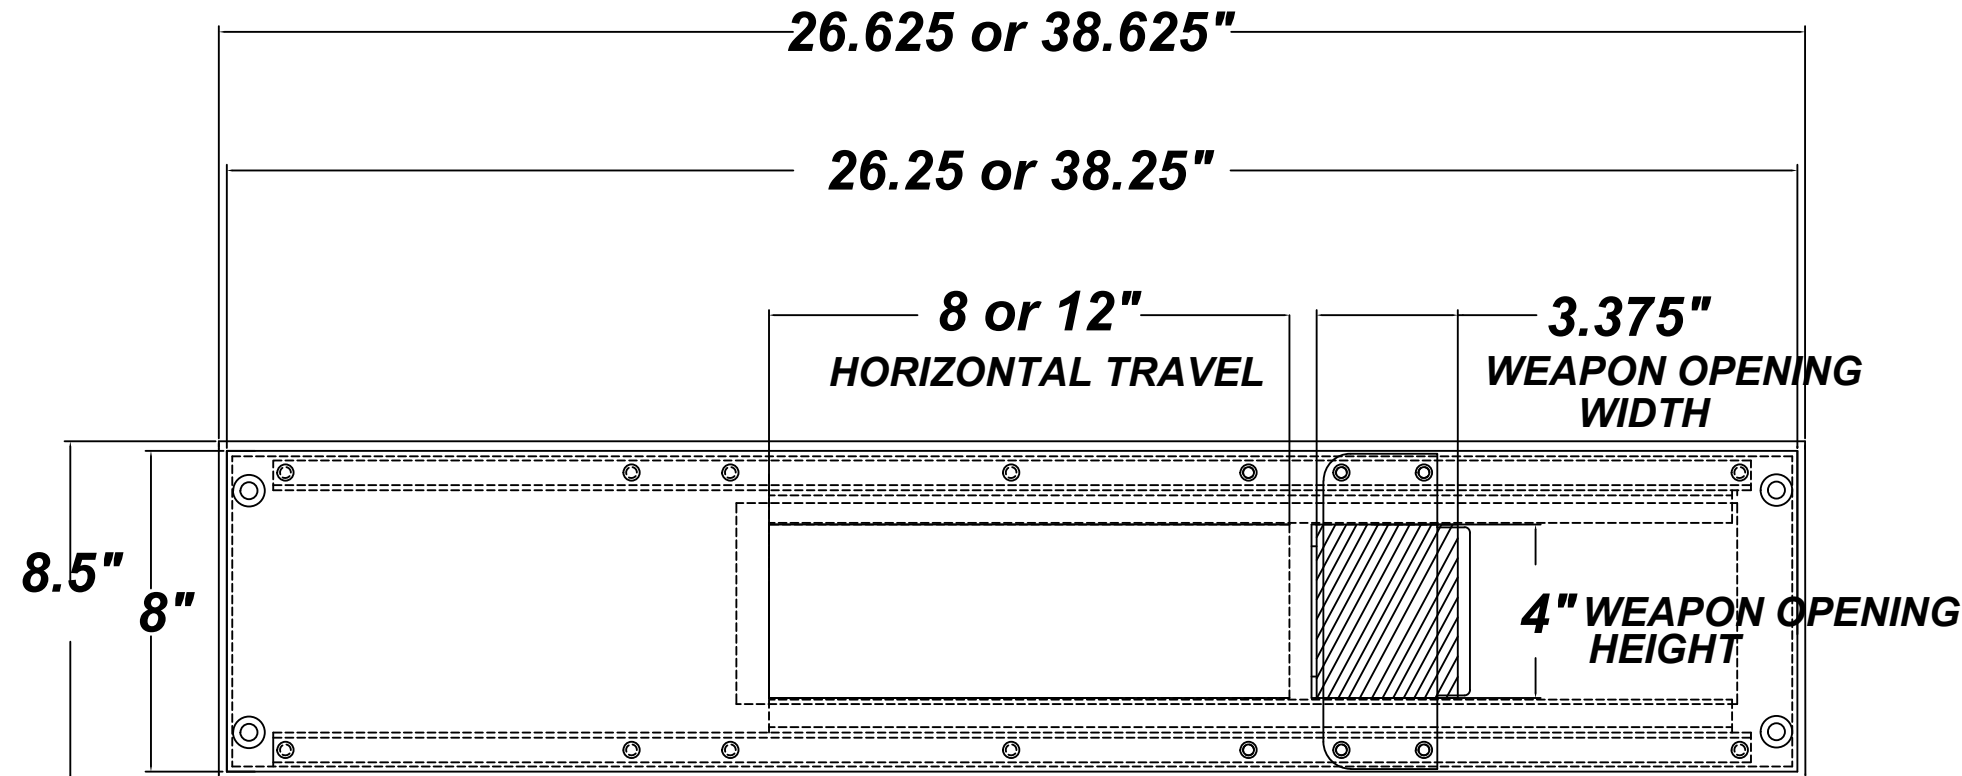

**RIGHT -HAND SLIDE (SHOWN)  
FOR LEFT-HAND SLIDE ROTATE 180DEG.**

**Interior Elevation  
(Shown Closed)**

**MODEL GP4 SERIES GUNPORT ASSEMBLIES:**

- CAN BE BOLTED OR WELDED TO A WALL CONSTRUCTION OR FEATURED IN WINDOW OR DOOR ASSEMBLIES.
- PROVIDES PANNING ACTION FOR AUTOMATIC WEAPONS, SHOTGUNS, TEAR GAS LAUNCHERS AND OTHER WEAPONS AND ALLOWS A GREATER FIELD OF FIRE.
- EACH STANDARD UNIT HAS A 3-3/8" WIDE X 4" HIGH WEAPONS OPENING WITHIN EACH SLIDE PLATE AND EITHER AN 8" OR 12" HORIZONTAL TRAVEL.
- HORIZONTALLY ACTING SPRING-LOADED TRIGGER PLATE AUTOMATICALLY COVERS OPENING WHEN NOT IN USE.
- OPERATION CONSISTS OF DEPRESSING TRIGGER PLATE WHILE OPENING THE SLIDE WITH THE PUSH PLATE AND INSERTING THE MUZZLE OF THE WEAPON.
- SLIDE IS TAMPER-PROOF FROM NON-SECURE SIDE

**MATERIAL/FINISHES:**

- CONSTRUCTED FROM CBP'S CERTIFIED SHOT-TEX BRAND BULLET RESISTANT STEEL.
- GUNPORT COVER IS SATIN STAINLESS STEEL.
- SLIDE AND MOUNTING PLATE ARE PRIME PAINTED STEEL.

**INSTALLATION:**

PREPARE WALL OPENING BEVELED TOWARDS WALL'S EXTERIOR. THIS WILL ALLOW AN EVEN GREATER FIELD OF FIRED. REMOVE COVER AND SLIDE PLATE ASSEMBLY FROM MOUNTING PLATE TO MAKE SURE THE OPENING IN THE MOUNTING PLATE IS ALIGNED PROPERLY WITH THE WALL OPENING. SECURE THE MOUNTING PLATE IN PLACE OVER THE OPENING WITH FOUR 3/8" DIAMETER BOLT ANCHORS (NOT SUPPLIED BY FACTORY). REATTACH SLIDE PLATE ASSEMBLY AND COVER.

FILE NO. BP1942  
SECURITY



CHICAGO BULLET PROOF SYSTEMS, INC  
2595 BOND ST. UNIVERSITY PARK, IL. 60484  
708-534-9102  
WWW.CHICAGOBULLETPROOF.COM