
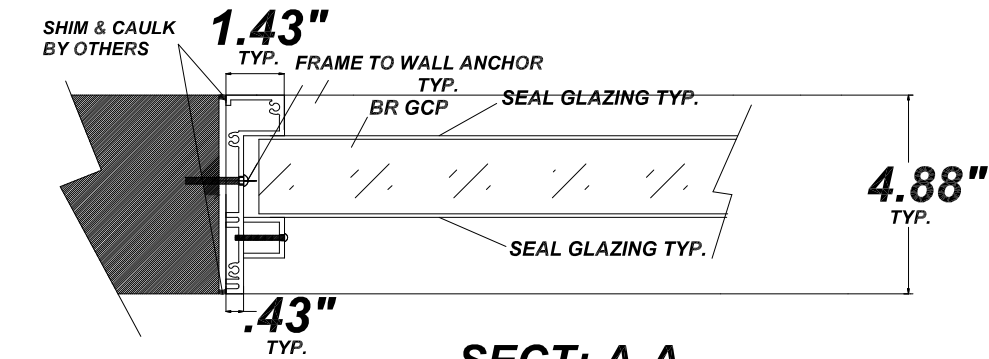


CUSTOM SIZES AVAILABLE
 CONTACT CBP FOR GLAZING TYPES AND SIZE RESTRICTIONS



SAVL BULLET RESISTANT
 WINDOW/FRAME
 ASSEMBLIES

Bullet resistant aluminum frames are armored to UL levels 1-3 with bullet resistant fiberglass, and armored to UL level 4-8 with bullet resistant Shot-Tex steels

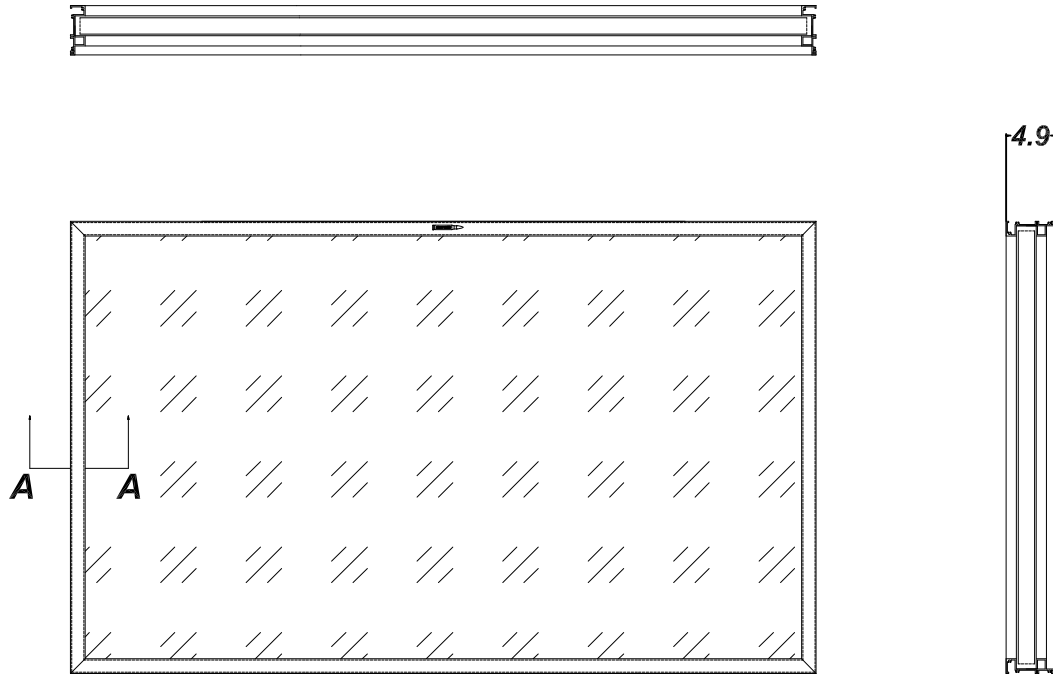

SECT: A-A

FRAMING SHOWN FOR SEALANT GLAZED APPLICATION,
 NATURAL VOICE SPACERS ALSO AVAILABLE - CONSULT CBP FOR DETAILS

FILE NO. BP1942 SECURITY			
CHICAGO BULLET PROOF SYSTEMS, INC. 2595 BOND ST. UNIVERSITY PARK, IL. 60484 708-534-9102 WWW.CHICAGOBULLETPROOF.COM			
SAVL STANDARD ALUMINUM VISION WINDOW			
ARMOR TBD	UL LEVEL 1-8	FRAME FINISH SATIN/CLEAR ANODIZED, DARK BRONZE ANODIZED, OR POWDER COATED	
WEIGHT TBD	GLAZING TBD	DRAWN BY RANDY R.	CHECKED BY MAX S.