




BLACKARMOR
TYRES, WHEELS, ENGINES, PARTS



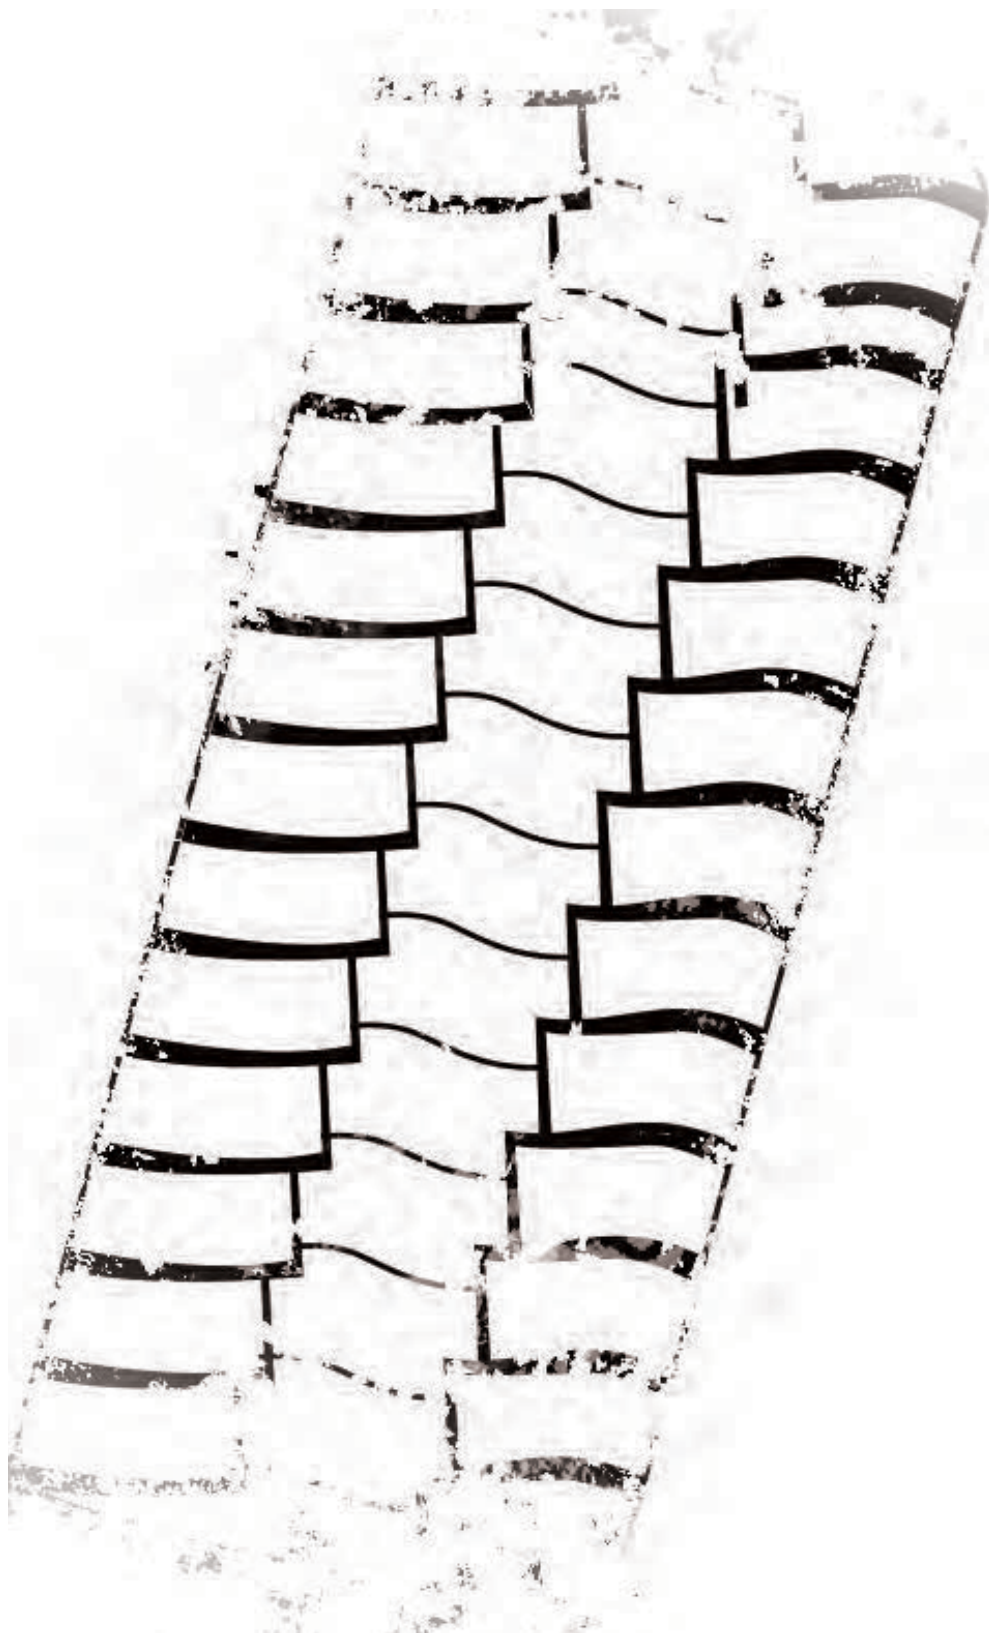

GK899A / GK899A+ (E-4)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12.00-20	24	GK899A	TT	45	8.5	8180	1000	320	1143
11.00-20	18/24	GK899A	TT	40	8.0	5480	1200	300	1097
10.00-20	18	GK899A	TT	40	7.5	5470	890	278	1055
10.00-20	18	GK899A+	TT	40	7.5	5470	890	278	1055
11.00-20	18	GK899A+	TT	33	8.0	5480	1200	300	1097



GK803A (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12.00-20	18/24	GK803A	TT	30	8.5	3750	810	315	1145
11.00-20	18	GK803A	TT	26.5	8.0	3650	910	293	1105
10.00-20	18	GK803A	TT	28.5	7.5	3350	910	278	1073



GK899 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
12.00-20	18	GK899	TT	26.5	8.5	3750/3350	810/740	315	1145



GK698 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
9.00-20	16	GK698	TT	24	7.0	2900/2500	880/810	259	1018



GK799 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
8.25-16	16	GK799	TT	18	6.50H	1800/1600	730	235	855
7.50-16	14	GK799	TT	17	6.00G	1500/1320	730	215	805
7.00-16	14	GK799	TT	15.5	5.50F	1320/1180	730	200	775
6.50-16	12	GK799	TT	14.5	5.50F	1060/925	630	185	750



GK918 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12.00-20	20	GK918	TT	28	8.5	4000/3450	880/810	315	1145
11.00-20	18	GK918	TT	30	8.0	3650/3150	910/840	293	1105
10.00-20	18	GK918	TT	28	7.5	3350/2900	910/840	278	1073
9.00-20	18	GK918	TT	26	7.0	3000/2650	910/840	259	1038



LY718 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
12.00-24	24	LY718	TT	21	8.5	4790/4250	1000/930	315	1247
12.00-24	18	LY718	TT	21	8.5	4200/3750	810/740	315	1247
12.00-20	20	LY718	TT	21	8.5	4000/3450	880/810	315	1145
12.00-20	18	LY718	TT	21	8.5	3750/3350	810/740	315	1145

Ps: Timber Truck Tires



GK718 (E-4)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
12.00-24	24	GK718	TT	35	8.5	4790/4250	1000/930	315	1275
12.00-24	20	GK718	TT	35	8.5	4500/4000	880/810	315	1275

Ps: Timber Truck Tires

UNDERGROUND MINING TIRES



ZM722 / C352 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
44X18-20	32	C352	TL	31.5	15.00	9120/8480	-/1030	478	1130
45X16-20	36	ZM722	TL	47	15.00	10025	1030	419	1130
42X13-20	32	ZM722	TT	25	9.00	9070	-	330	1067
42X13-20	24	ZM722	TT	25	9.00	8480	1000	330	1067
38X16-15	32	ZM722	TL	31	11.50	7800	1000	396	1000
14.50L-15	32	ZM722	TL	26	11.50	6305	1030	358	902
14.50L-15	28	ZM722	TL	26	11.50	5580	1030	358	902
14.50L-15	20	ZM722	TT	26	11.50	5130	900	358	902
10.00L-15	24	ZM722	TT	28	7.50	4875	1030	284	917
10.00L-15	16	ZM722	TT	28	7.50	4235	790	284	917
32X14.5-15	24	ZM722	TL	27	11.50	4945	1030	355	838
32X12.5-15	24	ZM722	TT	27	9.75	4150	1000	310	826
28X12.5-15	28	ZM722	TT	26	9.75	3355	1030	305	711
15L-10	24	ZM722	TT	24	13.00	3470	860	366	704
7.50-10	16	ZM722	TT	22	5.50F	1580	1030	203	647

Ps: - Fill 15L-10—27X15-10 14.50L-15—35X15-15—380/70-15 10.00L-15—36X11-15 32X12.5-15—32X12.1-15 32X14.5-15—32X15-15 28X12.5-15—355/45-15




S8803 (E-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
50X20-20	36	S8803	TL	33	15.00	12940	1030	495	1270
14.00-20	32	S8803	TT	29	10.00	10025	-	375	1245
14.00-20	28	S8803	TT	29	10.00	9250	965	375	1245

Ps: - Fill




L-4S



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
18.00-25	32	L-4S	TL	58	13.00/2.5	15000	750	526	1673
14.00-24	24	L-4S	TT	45.5	10.00	9500	850	375	1420
10.00-20	16	L-4S	TT	26	7.5	5090	790	278	1073

Ps: Cut Protected



L-5S / L-5SA / L-5SL



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
29.5-29	40	L-5S	TL	110	25.00/3.5	23600	625	750	2025
29.5-25	34	L-5S	TL	110	25.00/3.5	19800	525	750	1920
26.5-25	36	L-5S	TL	100	22.00/3.0	18500	625	675	1800
18.00-25	32	L-5S	TL	85	13.00/2.5	15000	750	526	1673
17.5-25	24	L-5S	TT/TL	82	14.00/1.5	9000	675	445	1400
17.5-25	20	L-5S/L-5SL/L-5SA	TT/TL	82/63.5/45.5	14.00/1.5	8250	575	445	1400
14.00-24	28	L-5S/L-5SL	TT	77/63.5	10.00	13500/10000	1000/925	386/375	1417/1420
12.00-24	24	L-5S/L-5SL	TT	55/47	8.5	10250	1000	333	1300
12.00-20	28	L-5S	TT	67	8.5	8620	1030	340	1173
12.00-20	20	L-5SA	TT	57	8.5	6325	900	315	1145
10.00-20	18	L-5S	TT	58	7.5	7255	1000	300	1097
8.25-15	24	L-5S	TT	52	6.5	6070	1030	260	864

Ps: Cut Protected



S8817 (L-5)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12.00-20	28	S8817	TT	61	8.5	8620	1030	315	1145
12.00-20	24	S8817	TT	61	8.5	8180	1000	315	1145

PORT USE TIRES



E-4




SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
18.00-25	40/44	E-4	TL	69	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	526	1675
16.00-25	36	E-4	TL	62	11.25/2.0	1150	24500	21800	19700	18400	17700	17300	17000	16350	432	1548
16.00-25	32	E-4	TL	62	11.25/2.0	1000	22100	19650	17800	16600	16000	15600	15350	15195	432	1548
16.00-25	28	E-4	TL	62	11.25/2.0	900	20700	18400	16675	15525	14950	14605	14375	14260	432	1548
14.00-25	28	E-4	TT/TL	57	10.00/1.5	1000	18000	16000	14500	13500	13000	12700	12500	12400	386	1417
14.00-24	32	E-4	TL	57	10.00	1100	19605	17430	15845	14700	14160	13820	13600	13460	386	1417
14.00-24	28	E-4	TT/TL	57	10.00	1000	18000	16000	14500	13500	13000	12700	12500	12400	386	1417
12.00-24	24	E-4	TT	54	8.5	1000	13600	12150	11000	10250	9850	9650	9500	9400	333	1300
12.00-20	24	E-4	TT	45	8.5	1000	13000	11600	10510	9800	9440	9230	8250	8180	340	1173
10.00-20	18	E-4	TT	40	7.5	1000	9630	8560	7780	7255	6990	6830	5520	5480	300	1097

Ps: Handler Service




IND-4




SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
18.00-25	40	IND-4	TL	56	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	515	1675
14.00-24	28	IND-4	TT/TL	51	10.00	1000	18000	16000	14500	13500	13000	12700	12500	12400	375	1370
12.00-24	24	IND-4	TT	45	8.5	1000	13600	12150	11000	10250	9850	9650	9500	9400	315	1275




IND-4A




SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
18.00-25	40, 44	IND-4A	TL	58	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	515	1675




L-4S



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
18.00-25	40	L-4S	TL	58	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	526	1675




L-5S (Special)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
21.00-25	40	L-5S	TL	97	15.00/3.0	1150	36386	32343	29311	27290	26279	25672	25268	25066	617	1798
18.00-25	40	L-5S	TL	85	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	538	1675
14.00-25	28	L-5S	TT/TL	77	10.00	1000	18000	16000	14500	13500	13000	12700	12500	12400	386	1417
14.00-24	28	L-5S	TT/TL	77	10.00	1000	18000	16000	14500	13500	13000	12700	12500	12400	386	1417
12.00-24	24	L-5S	TT	55	8.5	1000	13600	12150	11000	10250	9850	9650	9500	9400	333	1300
12.00-20	28	L-5S	TT	67	8.5	1030	13440	12040	10975	10250	9910	9690	9520	9400	330	1173
10.00-20	18	L-5S	TT	58	7.5	1000	9630	8560	7780	7255	6990	6830	5520	5480	300	1097



E-4A



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
18.00-33	40	E-4A	TL	69	13.00/2.5	1150	35600	31670	28700	26700	25710	25120	24700	24500	509	1860
18.00-25	40	E-4A	TL	68	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	528	1684



E-3A



Rubber Tire Gantry

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
21.00-35	44	E-3A	TL	42	15.00/3.0	1250	45900	40800	36790	34420	33150	32380	31870	30980	570	2005
21.00-25	48	E-3A	TL	42	15.00/3.0	1250	41920	37250	33610	32030	30040	29310	28850	28620	570	1750
21.00-25	44	E-3A	TL	42	15.00/3.0	1250	39580	35180	31860	29950	28480	27800	27360	27140	570	1750
21.00-25	42	E-3A	TL	42	15.00/3.0	1150	37370	33220	30200	28000	27000	26360	25940	25730	570	1750
18.00-25	44	E-3A	TL	41	13.00/2.5	1250	32290	28700	25990	24110	23240	22700	22340	22160	510	1636
18.00-25	40	E-3A	TL	41	13.00/2.5	1150	30600	27200	24650	22950	22100	21590	21250	21080	510	1636

Ps: RTG AGVservice / AGV



E-3V



Rubber Tire Gantry

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
21.00-25	44	E-3V	TL	42	15.00/3.0	1250	39580	35180	31860	29950	28480	27800	27360	27140	570	1750
21.00-25	42	E-3V	TL	42	15.00/3.0	1150	37370	33220	30200	28000	27000	26360	25940	25730	570	1750

Ps: RTG AGVservice / AGV



E-3L (IND-3)



Rubber Tire Gantry

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
21.00-25	48	E-3L	TL	32	15.00/3.0	1250	39580	35180	31860	29950	28480	27800	27360	27140	570	1750
16.00-25	36	E-3L	TL	28	11.25/2.0	1150	24500	21800	19700	18400	17700	17300	17000	16350	430	1495

Ps: RTG service



GK899C (IND-3)



Rubber Tire Gantry

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	INFLATION PRESSURE (kPa)	LOAD CAPACITY AT VARIOUS SPEED (kg)								S.W. (mm)	O.D. (mm)
							0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h		
14.00-24	32	GK899C	TT/TL	28	10.00	1100	19605	17430	15845	14700	14160	13820	13600	13460	375	1370

Ps: RTG service

EARTHMOVING TIRES



E-4C



Wheel Loader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE (kPa)	S.W. (mm)	O.D. (mm)
						(kg)			
29.5-25	44	E-4C	TL	48	25.00/3.5	31500	1000	750	1920
29.5-25	38	E-4C	TL	48	25.00/3.5	28000	950	750	1920
29.5-25	34	E-4C	TL	48	25.00/3.5	19800	525	750	1920
29.5-25	28	E-4C	TL	48	25.00/3.5	17500	425	750	1920



L-4C



Wheel Loader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE (kPa)	S.W. (mm)	O.D. (mm)
						(kg)			
26.5-25	36	L-4C	TL	54	22.00/3.0	18000	625	675	1800
23.5-25	32	L-4C	TT/TL	45	19.50/2.5	13600	550	595	1615
23.5-25	24	L-4C	TT/TL	45	19.50/2.5	12495	475	595	1615
23.5-25	20	L-4C	TT	45	19.50/2.5	10900	375	595	1615



E-4 / L-4



Wheel Loader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE (kPa)	S.W. (mm)	O.D. (mm)
						(kg)			
★ 29.5-29	46	E-4/L-4	TL	45	25.00/3.5	25750	1000	750	1975
29.5-25	34	E-4/L-4	TL	64	25.00/3.5	19800	525	750	1920
26.5-25	44	E-4/L-4	TL	54	22.00/3.0	22000	750	675	1800
26.5-25	36	E-4/L-4	TL	54	22.00/3.0	18000	625	675	1800



E-3 / L-3 (E-3L)



Wheel Loader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
★ 26.5-25	44	E-3/L-3	TT/TL	38	22.00/3.0	26000	1000	675	1750
26.5-25	32	E-3/L-3	TT/TL	38	22.00/3.0	17000	550	675	1750
26.5-25	28	E-3/L-3	TT/TL	38	22.00/3.0	15500	475	675	1750
26.5-25	20	E-3/L-3	TT/TL	38	22.00/3.0	13200	350	675	1750
23.5-25	32	E-3/L-3	TT/TL	33	19.50/2.5	13600	550	595	1615
23.5-25	24	E-3/L-3	TT/TL	33	19.50/2.5	12500	475	595	1615
23.5-25	20	E-3/L-3	TT/TL	33	19.50/2.5	10900	375	595	1615
23.5-25	18	E-3/L-3	TT	33	19.50/2.5	10300	350	595	1615
23.5-25	16	E-3/L-3	TT	33	19.50/2.5	9500	300	595	1615
20.5-25	20	E-3/L-3	TT/TL	29	17.00/2.0	9500	450	520	1490
20.5-25	16	E-3/L-3	TT	29	17.00/2.0	7730	345	520	1490
17.5-25	20	E-3/L-3	TL	29	14.00/1.5	8250	575	445	1350
17.5-25	16	E-3/L-3 E-3L	TT	26/29	14.00/1.5	7300	475	445	1350
16/70-24	24	E-3/L-3	TT	24.5	13.00	8000	900	410	1175
16/70-24	14	E-3/L-3	TT	24.5	13.00	5600	450	410	1175
16/70-20	14	E-3/L-3	TT	24.5	13.00	5150	450	410	1075
20.5/70-16	14	E-3/L-3	TT	18	10.00	1600	280	320	900
12.00-16	14	E-3/L-3	TT	16.5	6.50H	1650	420	250	900

Ps: ★ Super Carrier Service



L-5



Wheel Loader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
29.5-29	34	L-5	TL	105	25.00/3.5	21200	525	750	2025
29.5-25	28	L-5	TL	105	25.00/3.5	17500	425	750	1920
26.5-25	20	L-5	TL	97	22.00/3.0	13200	350	675	1800

TELEHANDLER TIRES



E-3C / L-3C



Telehandler



Wheel Loader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
15.5-25	16	E-3C/L-3C	TL	28.5	12.00/1.3	5600	540	435	1325



G-2 / L-2



Telehandler



Grader

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
14.00-24	16	G-2/L-2	TL	25.4	10.00	7300	550	393	1346
14.00-24	12	G-2/L-2	TL	25.4	10.00	6305	430	393	1346
13.00-24	16	G-2/L-2	TL	25.4	8.00	6485	600	358	1277
13.00-24	12	G-2/L-2	TL	25.4	8.00	5580	450	358	1277



R-4



Telehandler

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
400/80-24	24	R-4	TL	29	DW13	5700	750	404	1250
400/80-24	20	R-4	TL	29	DW13	4750	500	404	1250

Ps: 400/80-24 —15.5/80-24

EXCAVATOR TIRES



R-4C  Excavator

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
8.25-16	16	R-4C	TT	20	6.50H	1800	730	235	835



E-3B  Excavator

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
9.00-20	14	E-3B	TT	25	7.0	2500	700	259	1038



E-3S  Excavator

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
10.00-20	18	E-3S	TT	28.5	7.5	5470	890	278	1073
9.00-20	16	E-3S	TT	28.5	7.0	4000	760	255	1015



E-3F  Excavator

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
9.00-20	18	E-3F	TT	28.5	7.0	4360	840	255	1015



E-3D  Excavator

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
8.25-16	16	E-3D	TT	20	6.50H	1800	730	235	835
7.50-16	16	E-3D	TT	20	6.00G	1250	500	215	815



DESERT TIRES



E-7 / E-7A



Seismic Vehicle

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
66X44.00-25	32	E-7A	TL	16	36.0TH	11185	480	1118	1702
66X44.00-25	24	E-7	TL	10	36.0TH	10000	380	1118	1702
66X44.00-25	20	E-7	TL	10	36.0TH	7020	345	1118	1702



E-2



Seismic Vehicle

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
66X43.00-25	24	E-2	TL	47	36.0TH	10000	380	1054	1650
66X43.00-25	20	E-2	TL	47	36.0TH	8800	345	1054	1650



F-3



Truck

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
9.00-17	8	F-3	TL	10	7J	1000	245	230	910
9.00-16	8	F-3	TL	10	6.50H	975	245	255	860



E-7



Truck

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
22-20	14	E-7	TL	15	17.00	4125	280	555	1075
20-20	16	E-7	TL	15	14.00T	6000	360	505	1180
18-20	14	E-7	TL/TT	15	14.00T	4625	360	455	1090



SOLID TIRES



TR-1



Heavy duty Forklift



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	MAX LOAD		S.W. (mm)	O.D. (mm)
				Drive wheel (kg)	Steering wheel (kg)		
12.00-20	TR-1	MOLED-ON SOLID TIRES	47	9800	7100	290	1145
11.00/12.00-20	TR-1		47	8455	6755	292	1075
300-15	TR-1		40.5	5980	4330	305	839
250-15	TR-1						
8.25-15	TR-1		39	3405	-	236	840
28X9-15	TR-1		40	3790	2745	221	697
7.00-12	TR-1		33	3010	2180	178	676
23X10-12	TR-1		29.5	3770	2900	254	592
6.50-10	TR-1		31	2900	2100	178	592
6.00-9	TR-1		30	1920	1390	160	541
18X7-8	TR-1		26.5	2430	1870	168	460



G-2



Telehandler

SIZE	PATTERN NO.	TYPE	T.D.(mm)	MAX LOAD		S.W. (mm)	O.D. (mm)
				Drive wheel (kg)	Steering wheel (kg)		
15.5/17.5-25	G-2	MOLED-ON SOLID TIRES	72	7150	—	390	1325
13.00/14.00-24	G-2		67.5	5990	—	330	1283



TR-6



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	MAX LOAD		S.W. (mm)	O.D. (mm)
				Drive wheel (kg)	Steering wheel (kg)		
8.25-15	TR-6	MOLED-ON SOLID TIRES	35	3405	—	236	840



SM-2



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	MAX LOAD		S.W. (mm)	O.D. (mm)
				Drive wheel (kg)	Steering wheel (kg)		
11.00/12.00-20	SM-2	MOLED-ON SOLID TIRES	—	8455	6755	292	1075
21X8X15	SM-2		—	1975	1520	206	539
7.00-12WP	SM-2		—	3010	2180	224	682
7.00-12	SM-2		—	3010	2180	178	665
6.50-10	SM-2		—	2900	2100	178	595
305/76-254	SM-2		—	450	450	76	304
6.00-9	SM-2		—	1920	1390	160	541
18X7-8	SM-2		—	2430	1870	168	460
5.00-8	SM-2		—	—	1100	127	465



SR-1



SR-1 (NM)



Scissor Lift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	MAX LOAD		S.W. (mm)	O.D. (mm)
				Drive wheel (kg)	Steering wheel (kg)		
406X125	SR-1	Non-Marking Tires	3	1430	1430	125	406
323X100	SR-1		3	955	955	100	323
16X5	SR-1		3	1315	1315	127	406
15X5	SR-1		3	1450	1450	127	380
14X4.5	SR-1		3	1265	1256	114	356
12.5X4.25	SR-1		3	1015	1015	107	315
12X4.5	SR-1		3	1085	1085	114	305
12X4	SR-1		3	680	680	100	309



SR722



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	STD. RIM	MAX LOAD		S.W. (mm)	O.D. (mm)
					Drive wheel (kg)	Steering wheel (kg)		
8.25-15	SR722	RESILIENT TIRES	34.5	6.5	5085	3910	236	847
28X9-15	SR722		32	7.0	4060	3125	225	706
6.50-10	SR722		25	5.00F	2715	2090	178	597
15X4.5-8	SR722		16	3.00	1005	775	114	380



SR77



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	STD. RIM	MAX LOAD		S.W. (mm)	O.D. (mm)
					Drive wheel (kg)	Steering wheel (kg)		
28X9-15	SR77	RESILIENT TIRES	26	7.0	4060	3125	210	694
7.00-12	SR77		25	5.00S	3105	2390	162	650
6.50-10	SR77		24	5.00F	2715	2090	150	571
6.00-9	SR77		24	4.00E	1975	1520	137	524
5.00-8	SR77		24	3.00D	1255	965	114	455



SR806



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	STD. RIM	MAX LOAD		S.W. (mm)	O.D. (mm)
					Drive wheel (kg)	Steering wheel (kg)		
8.25-20	SR806	RESILIENT TIRES	35	6.5	5165	4305	236	992
300-15	SR806		33	8.0	6895	5305	300	838
250-15	SR806		31	7.0	5220	2225	250	735
700-15	SR806		29	5.50	3700	2845	204	759
27X10-12	SR806		29	8.00G	4595	3535	261	683
7.00-12	SR806							
23X9-10	SR806		26	6.50F	3730	2870	225	595
200/50-10	SR806		19	6.50F	2910	2240	196	458
21X8-9	SR806		19	6.00E	2890	2225	207	535
140/55-9	SR806		14	4.00E	1380	1060	147	375
6.00-9	SR806		24	4.00E	1975	1520	160	545
5.00-8			17	3.00D	1255	865	146	469
18X7-8	SR806		17	4.33R	2430	1870	170	457
16X6-8	SR806		17	4.33R	1545	1190	160	416



SR817



Bomb Carts

SIZE	PATTERN NO.	TYPE	T.D.(mm)	STD. RIM	MAX LOAD		S.W. (mm)	O.D. (mm)
					Drive wheel (kg)	Steering wheel (kg)		
12.00-20	SR817	RESILIENT TIRES	31	8.5	8920	7435	280	1075
11.00-20	SR817		31	8.0	7715	6430	280	1075



SR328



Forklift

SIZE	PATTERN NO.	TYPE	T.D.(mm)	STD. RIM	MAX LOAD		S.W. (mm)	O.D. (mm)
					Drive wheel (kg)	Steering wheel (kg)		
23X10-12	SR328	RESILIENT TIRES	20	8.0	4450	3425	261	595

FORKLIFT TIRES



ZM806 (IND-4)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
9.00-20RG	18	ZM806	TT	36	7.0	6020	960	259	1018
8.25-20RG	18	ZM806	TT	32	6.5	5300	950	235	974
7.50-16RG	16	ZM806	TT	28	6.00G	5440	1030	215	805
300-15RG	22	ZM806	TT	29.5	8.0	7155	1030	300	840
250-15RG	20	ZM806	TT	28.5	7.5	4580	1030	250	735
8.25-15RG	16	ZM806	TT	32	6.5	4050	925	235	840
28X9-15RG	16	ZM806	TT	27.5	7.0	3115	1000	220	710
7.00-15RG	14	ZM806	TT	33	5.5	3140	1000	200	750
7.00-12RG	14	ZM806A	TT	32.5	5.00S	2590	1000	190	685
6.50-10RG	12	ZM806A	TT	31.5	5.00F	1895	1000	175	600
6.50-10RG	12	ZM806C	TT	24	5.00F	1895	1000	175	590
6.00/6.90-9RG	12	ZM806	TT	26	4.00E	1675	1030	160	540
5.00/5.70-8RG	10	ZM806	TT	23	3.50D	1150	1000	137	470



ZM722A (IND-4)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
14.00-25	28	ZM722A	TT	40	10.00/1.5	13500	1000	375	1370
14.00-24	28	ZM722A	TT	40	10.0	13500	1000	375	1370
12.00-20	24	ZM722A	TT	45	8.5	9800	1000	320	1143
10.00-20	18	ZM722A	TT	40	7.5	7255	1000	300	1097



ZM722 (IND-3)



ZM722L (IND-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12.00-20	28	ZM722L	TT	25	8.5	8525	1030	315	1145
9.00-20	16	ZM722	TT	22.7	7.0	5595	860	259	1018
7.50-16	16	ZM722	TT	17	6.00G	5440	1030	215	820
300-15	20	ZM722	TT	21	8.0	5940	930	300	840
250-15	18	ZM722	TT	20.5	7.5	4110	1030	250	735
8.25-15	16	ZM722	TT	18.5	6.5	4050	925	235	840
28X9-15	14	ZM722C	TT	16.5	7.0	3050	970	220	710
7.00-15	14	ZM722	TT	17	5.5	3140	1000	199	731
8.25-12	12	ZM722	TT	16.8	5.00S	2000	700	210	728
7.00-12	14	ZM722	TT	18	5.00S	2590	1000	190	676
6.50-10	10	ZM722	TT	16	5.00F	1655	790	175	590
6.50-10	10	ZM722C	TT	15	5.00F	1655	790	175	
6.00/6.90-9	10	ZM722	TT	17	4.00E	1505	860	160	540
18X7-8	14	ZM722	TT	13	4.33R	1505	970	173	465
5.00-8	8	ZM722	TT	14	3.50D	1000	790	137	470



ZM712 (IND-3)

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
355/65-15	28	ZM712	TT/TL	23	9.75	6000	1000	330	841

Ps: SPMT SERVICE



S8802



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W.	O.D. (mm)
						(kg)	(kPa)		
185-14	10	S8802	TL	20	5.50F	1120	655	200	655
165-13	10	S8802	TL	21.5	4 1/2J	1050	655	177	608



S8804



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
9.50-16.5	10	S8804	TL	18	6.75	1440	550	241	780
8.75-16.5	10	S8804	TL	19	6.75	1410	520	225	772
8.00-16.5	8	S8804	TL	14	6.00	1410	450	203	726
225/75D16	10	S8804	TL	19	6.00	1605	790	224	750
225/75-15	10	S8804	TL	19	6.00	1635	725	224	750
7.50-10	16	S8804	TT	16	5.50F	2925	1030	203	647
6.50-10	12	S8804	TT	18	5.00F	1150	970	200	615
6.90-9	10	S8804	TT/TL	18	4.00E	1280	860	175	558
6.90-9	8	S8804	TL	13	4.00E	1125	690	175	558
5.70/5.00-8	8	S8804	TL	12.5	3.75	830	790	146	480
4.80/4.00-8	8	S8804	TL	13	3.75	525	790	124	432

Ps: 225/75-15—28X8-15



S8805 (M+S)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
8.75-16.5	10	S8805	TL	19	6.75	1410	520	225	772
225/75D16	10	S8805	TL	19	6.00	1605	790	224	770



S8807 (M+S)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
8.75-16.5	12	S8807	TL	25	6.75	1520	655	225	772
225/75D16	12	S8807	TL	25	6.00	1735	655	224	784



BOOM LIFT TIRES



R-4

R-4 (NM)




SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
445/50D710	24	R-4	TL	25	W15	12200	1000	445	1189
445/50D710	20	R-4	TL	25	W15	7740	790	445	1189
445/50D710	18	R-4	TL	25	W15	7300	690	445	1189
385/45-28	18	R-4	TL	25	13.00	8500	1000	376	1082
18-625	16	R-4	TL	25	15.00	6900	690	450	1033
15-625	16	R-4	TL	25	13.00	5580	690	385	1018
355/55D625	14	R-4	TL	22.5	11.75	3450	520	360	936
33X12D610	12	R-4	TL	20	10	3880	550	305	838
445/65-22.5	18	R-4	TL	32	13.00	9000	800	445	1180
385/65D22.5	18	R-4	TL	25	11.75	6900	690	389	1095
39X15-22.5	16	R-4	TL	25	13.00	5580	690	385	1018
315/55D20	12	R-4	TL	19	11	4000	560	319	848
385/65D19.5	16	R-4	TL	25	11.75	4935	690	397	994
385/65D19.5	14	R-4	TL	25	11.75	4625	590	397	994
240/55D17.5	12	R-4	TL	10	6.75	2800	735	230	725
14-17.5	14	R-4	TL	20	10.5	3875	520	348	913
33X15.5-16.5	14	R-4	TL	20	12	3980	490	394	838

Ps: 385/65D19.5—15-19.5



HF-3



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
26X12D380	8	HF-3	TL	16	10	1550	380	309	670

SKID STEER AND BACKHOE LOADER TIRES



X99 (L-4)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12-16.5	14	X99	TL	40.5	9.75	3075	620	315	861



X77 (E-2)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12-16.5	14	X77	TL	30	9.75	3075	620	307	831



X88 (L-5)



X89 (L-5)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
14-17.5	16	X88	TL	40	10.50	3875	550	349	945
12-16.5	14	X88/X89	TL	43	9.75	3075	620	315	861
10-16.5	14	X88/X89	TL	42	8.25	2725	725	270	785



ZM789 (L-5)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
27X8.50-15	10	ZM789	TL	33	7.00	1460	550	221	686
5.90-15	8	ZM789	TL	26	5.00	950	620	152	686
5.70-12	8	ZM789	TL	20	4.50	850	620	146	574
12-16.5	14	ZM789	TL	37	9.75	3075	620	315	861
10-16.5	14	ZM789	TL	36	8.25	2725	725	270	785



I-3 / L-2



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
12.5/80-18	12	I-3	TL	29	9.00	2625	365	312	1004
12-16.5	14	L-2	TL	22	9.75	3075	620	310	840



R-4



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
27X10.50-15	8	R-4	TL	23	8.50	1405	415	267	686
27X8.50-15	8	R-4	TL	23	7.00	1310	415	221	686
23X8.50-12	8	R-4	TL	18	7.00	920	415	221	596
12-16.5RG	12	R-4	TL	26	9.75	2865	550	321	820
12-16.5BG	10	R-4	TL	17	9.75	2540	450	321	820
10-16.5RG	10	R-4	TL	24	8.25	2135	520	274	774
10-16.5BG	8	R-4	TL	16	8.25	1880	415	274	774



X-15 (R-4)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
31X15.5-15	12	X-15	TL	26	13.00	2100	415	402	802
26X12.00-12	12	X-15	TL	27	10.50	1940	520	300	670



TRENCHER TIRES

C328 / C7503 (R-1)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
31X15.50-15	8	C7503	TL	19	13.00	1980	310	402	802
29X12.5-15	8	C7503	TL	21.5	10.00	1950	320	325	770
26X12.00-12	8	C328	TL	19	10.50	1370	290	309	670



LAWN & GARDEN TIRES

S9101 (R-3)



SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
31X15.50-15	8	S9101	TL	14.3	13.00	1980	310	414	800
29X12.50-15	8	S9101	TL	13	10.00	1950	320	320	750
26X12.00-12	8	S9101	TL	11.2	10.50	1370	290	309	670

MUD ATV TIRES



R-1A

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
35X9.00-20	4	R-1A	TL	43.5	W7	450	50	215	880



TRAILER TIRES



VR381

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
7.00-15LT	8	VR381	TL	9.5	5.50F	925/825	410	202	752
7.00-15LT	10	VR381	TL	9.5	5.50F	1060/925	520	202	752
7.50-16LT	10	VR381	TL	9.5	6.00G	1250/1120	520	220	808
7.50-16LT	12	VR381	TL	9.5	6.00G	1405/1250	620	220	808
205/90D15	8	VR381	TL	9.5	5.50F	925/825	410	202	752
225/90D16	10	VR381	TL	9.5	6.00G	1250/1120	520	220	808
225/90D16	12	VR381	TL	9.5	6.00G	1405/1250	620	220	808



VR382

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
8-14.5	10	VR382	TL	6.0	6.00	1180	590	203	707
8-14.5	12	VR382	TL	6.0	6.00	1285	690	203	707
8-14.5	14	VR382	TL	6.0	6.00	1375	760	203	707
215/60D14.5	14	PA702	TL	5.0	6.00	1405	760	196	632
235/60D14.5	14	PA704	TL	8.5	7.00	1590	760	235	665



P-1049

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
10.00-20	14	KT218	TT	10.5	7.5	2800/2430	700/630	278	1040
11-22.5	12	P-1049	TL	11.0	8.25	2500/2180	590/520	279	1054
11-22.5	14	P-1049	TL	11.0	8.25	2800/2430	690/620	279	1054
11-22.5	16	P-1049	TL	11.0	8.25	3000/2650	790/720	279	1054



LOW PLATFORM TRAILER TIRES

PA35

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
8.25-15	18	PA35	TT	12	6.50T	4000	1000	235	840



PA707

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
7.50-16	16	PA707	TT	11	6.00G	1580/1390	770	215	805

LIGHT & HEAVY DUTY TRUCK TIRES



H-LUG

H-RIB

XT888

ZL319

HL928

M777

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
12.00-24	18	XT888	TT	20	8.5	4250/3750	810/740	315	1247
12.00-20	18	H-Lug	TT	22	8.5	3725/3265	795/725	315	1145
	18	ZL319	TT	17		3750/3350	810/740	315	1125
	18	H-Rib	TT	15.4		3725/3265	795/725	315	1145
11.00-20	18	M777	TT	22	8.0	3650/3150	910/840	293	1105
	18	H-Lug	TT	22		3265/2865	795/725	293	1105
	18	ZL319	TT	15.5		3650/3150	910/840	293	1085
	18	ZR158/HL928	TT	15.5/23		3650/3150	910/840	293	1085/1105
	18	H-Rib	TT	16		3265/2865	795/725	293	1105
10.00-20	18	M777	TT	23	7.5	3350/2900	910/840	278	1073
	16	XT888	TT	22.7		3000/2650	810/740	278	1073
	16	H-Lug	TT	22		3000/2630	795/725	278	1073
	16	H-Rib	TT	17.4		3000/2630	795/725	278	1073
	16	QZ312/NJ312	TT	16		3000/2650	810/740	278	1055
	16	QZ198/NJ198	TT	15		3000/2650	810/740	278	1055
	16	XT222	TT	15.5		3000/2650	810/740	278	1055
9.00-20	18	M777	TT	22	7.0	3000/2650	910/840	259	1055
	16	H-Lug	TT	22		2650/2325	795/725	259	1038
	16	QZ312/NJ312	TT	16		2900/2500	880/810	259	1018
	16	QZ168/NJ168	TT	14.5		2900/2500	880/810	259	1018
	16	H-Rib	TT	15.4		2650/2325	795/725	259	1038
	16	NJ188	TT	13.5		2900/2500	880/810	259	1018
	18	SUPER111	TT	22		2650/2325	795	259	1055
8.25-20	16	H-Lug	TT	17.5	6.5	2430/2180	910/840	236	974
	16	H-Rib	TT	14		2430/2180	910/840	236	974
7.50-20	14	NJ188	TT	13.5	6.0	1900/1700	810/740	215	935
	14	ZL316	TT	13.5		1900/1700	810/740	215	935

AGRICULTURAL TIRES



H-LUG H-RIB V-LUG V-RIB ZM668 NJ328

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
8.25-16LT	20	V-Lug	TT	19	6.50H	2300/2000	850	235	855
	16	H-Lug, S-Lug, H-Rib	TT	17.8, 13.2, 13		1845/1755	655	235	855
	16	NJ328, NJ188	TT	14, 12.5		1800/1600	730	235	855
	14	NJ328, NJ188	TT	14, 12.5		1700/1500	630	235	855
7.50-16LT	18	V-Lug	TT	17.5	6.00G	1950/1800	850	215	805
	16	H-Lug, H-Rib	TT	17.5, 12.8		1580/1390	760	215	805
	14	NJ328, NJ188	TT	12, 11.5		1500/1320	730	215	805
7.00-16LT	14	H-Lug	TT	17.5	5.50F	1320/1180	730	200	800
	14	H-Rib	TT	13		1320/1180	730	200	800
	12	NJ328, NJ188, ZL719	TT	11.5, 11, 19		1215/1060	630	200	775
6.50-16LT	16	V-Rib	TT	11	4.50	1180/1030	650	175	755
	10	NJ328, NJ188	TT	12, 10	5.50F	975/875	530	185	750
	12	ZL719	TT	19	5.50F	1060/925	630	185	750
6.00-16LT	10	NJ328, NJ188	TT	10, 8	4.50E	850/750	530	170	730
7.50-15LT	14	H-Lug, H-Rib	TT	17, 12.8	6.00G	1420/1260	655	215	791
7.00-15LT	12	H-Lug, H-Rib	TT	16, 12.5	5.50F	1175/1030	620	200	760
6.50-15LT	8	JQ316, JQ118	TT	10	4.50E	825/730	420	180	730
6.00-15LT	8	ZL316, ZR118	TT	10	4.50E	730/630	420	170	705
	8	ZL719	TT	15.5		730/630	420	170	705
6.50-14LT	12	H-Lug, H-Rib	TT	12.5	4 1/2J	915/850	480	180	705
6.50-14	8	ZM668	TT	14.5	4 1/2J	775/690	420	180	705
6.00-14LT	8	NJ328, NJ188	TT	9	4 1/2J	690/600	420	170	680
	8	ZL719	TT	15.5	4 1/2J	690/600	420	170	680
6.40/6.50-13	6	ZM668	TT	14	4 1/2J	515	250	160	620
5.00-12	14	V-Lug	TT	10	3.50B	800/750	600/575	150	596
	12	ZM668	TT	14	3.50B	585/535	530	135	582
6.00-13LT	8	ZL316, NJ188	TT	9	4.50B	650/580	420	170	655
5.50-13LT	14	ZL719L	TT	14	4.50	900/800	700	185	680
6.00-12	6	ZM668	TT	15	4.50E	405	420	165	625



NJ188 ZL316 ZR132 ZL512 / R-1 SL619 ZR112

SIZE	PR	PATTERN NO.	TYPE	T.D.(mm)	STD.RIM	MAX LOAD	INFLATION PRESSURE	S.W. (mm)	O.D. (mm)
						(kg)	(kPa)		
						S/D	S/D		
12.4-28	12	R-1	TT	17	W11	1650	250	329	1285
9.5-24	8	ZL512	TT	30	W8	1110	280	240	1050
9.00-20	10	SL629	TT	22	7.0	1420	340	225	920
7.50-20	10	HS27B	TT	18	5.50F	1020	370	190	910
7.50-16	12	SL619, ZR621	TT	19.5	5.50F	1305	520	205	810
	6	ZL512	TT	24		650	210	205	810
6.70-14	12/14	H-Rib	TT	12.5	4 1/2J	915/850	480	190	720
6.50-16	6	ZR132	TT	16	4.50E	615	310	175	760
6.00-16	6	ZR132	TT	16	4.00E	560	340	160	740
5.50-16	10	NJ188	TT	9	4.00E	1500	650	150	685
	10	NJ328, ZL316	TT	10		1500	650	150	685
5.00-16	8	NJ328, ZL316	TT	10	3.00D	1100	630	132	675
4.50-16	8	ZL316	TT	10	3.00D	1000	560	122	655
5.00-15	6	ZR132	TT	12.5	4 J	465	420	140	665
26X9-14.5	24	S-109	TT	5	6.00	907	345	228	660
24X8-14	20	S-109	TT	5	6.00	907	345	203	610
5.00-14	8	NJ328, ZL316	TT	8	3.00D	600	420	132	624
4.50-14	8	NJ328, ZL316	TT	8	3.00D	450	420	122	595
	8	NJ188	TT	7		450	420	122	595
4.00-14	8	ZR132	TT	11	3.00D	270	340	110	590
5.50-13	8	NJ188	TT	8	4.00B	560/500	420	160	620
21X7-12	16	S-109	TT	5	5.50	907	345	178	533
6.00-12	6	ZL512, ZL512A	TT	24	4.50E	310	180	165	640
5.00-12	8	ZR112	TT	8.5	3.50B	487/462	400	143	568
4.50-12	8	ZR112	TT	8.5	3.00B	412/400	400	127	545
4.00-12	4	NJ328	TT	7	3.00D	250	340	113	530