

self-restoring rocker-pin module

Description

Capacities (E_{max})

10,20,30,40,50,60t.

Output:

Analog: 2.0mV/V.

Digital: 30,000 or 100,000d.

Accuracy

3000d OIML R60.

Material of elastomer:

Alloy steel or stainless steel.

Approvals

OIML R60 Certificate

Accuracy class C3.

$V_{min} = E_{max}/15000$


Sealed to IEC 529.

Classification IP67 or IP68. Protection against total immersion in water for 30 minutes at a pressure corresponding to a 1 m head of water.



Dimensions

(In mm. 1mm = 0.03937 inches)

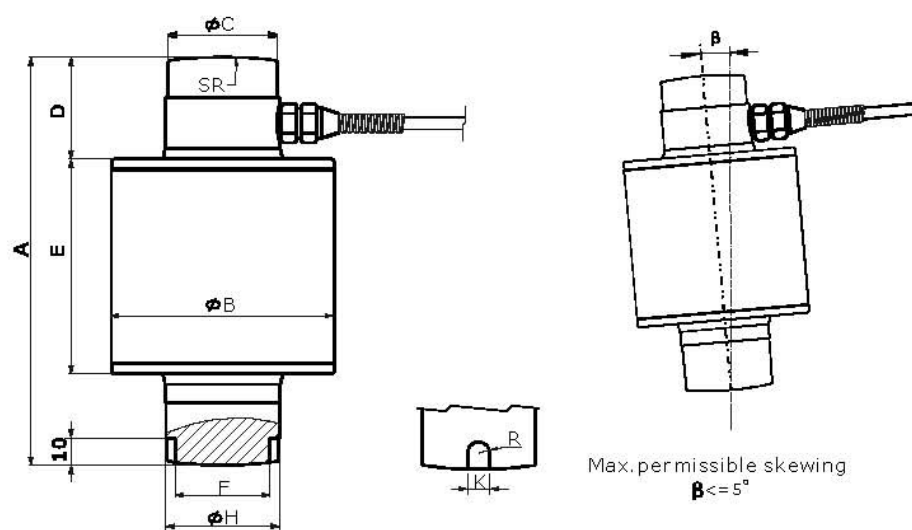

CAP./SIZE	A	B	C	D	E	F	H	K	SR
10~30t	150	82	40	38	82	34.7	41.7	8	150
40~60t	170	88	53	47	95	43	53	10	200