



Resources Unlimited Co USA




**FULL STAINLESS
STEEL DESIGN!!**

Fully Pneumatic Stencil Cleaner SC-P2G

- Completely pneumatic operation without any fire risk
- Ergonomic design for efficient operation and stencil load/unload
- Cleaning/drying process simple “one button” operation
- Capable of cleaning solder paste, glue and silicon adhesive
- Patented nozzle design ensures optimum cleaning results
- Stencil tension is not affected during the cleaning process
- Auto liquid feeding and draining system
- Fourflo® filter system helps to extend the solvent life
- Modular design for easy maintenance
- Design includes internationally recognized critical components

www.rucousallc.com

SC-P2 Stencil Cleaner

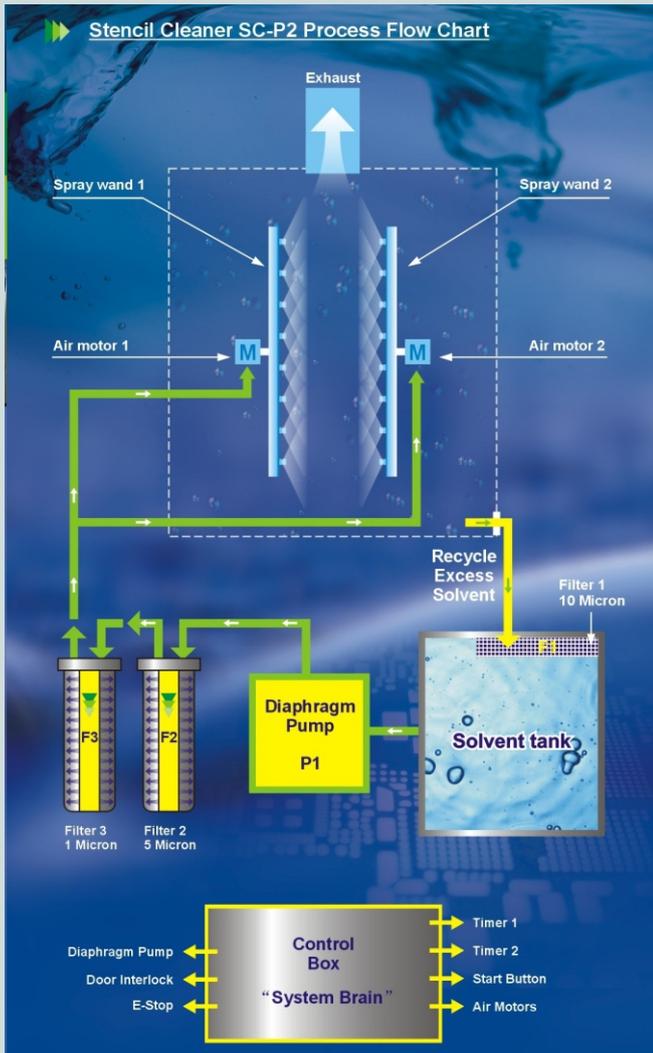


Unicomp Customer & Certificate List

Customer List: Partial list as of January 2010

- Motorola
- NOKIA Connecting People
- FLEXTRONICS
- Panasonic Ideas for life
- LIGHT-ON
- FOXCONN
- SAMSUNG
- BYD 比亚迪股份有限公司 BYD COMPANY LIMITED
- PHILIPS sense and simplicity
- TCL 天语 TCL
- Amphenol TC
- SELCOM GROUP
- HOLIP 韩国合立普
- ACW TECHNOLOGY
- STACI
- EMERSON Network Power
- JABIL
- DKG
- ELCOTEQ
- VTEI
- 110 INTERCONNECT 美国芯华电子
- CNR
- ELCOTEQ Elong Electronics China
- JAE
- PACKPONES
- SANMINA-SCI
- compine
- KeyForce EMS

Unicomp Certificates

- ISO
- CE
- 1/6 Patents

System Features/specifications

Dimensions	L1000 x W740 x H1785mm
Weight	350kg
Stencil Size	L736 x W736 x H40mm
Liquid Tank Capacity	Max: 50L – Min: 20L
Cleaning Time (Typical)	4 – 6 minutes
Drying Time (Typical)	4 – 8 minutes
Triple Filter System	Standard
Air Consumption	400 – 700L/min
Solvent Types	IPA, alcohol and water based solvent
Filter Life	Typical 2-3 months
Interlocked Stencil Door	Standard