

# H.O.W. RUBBER CATALOG

## GENERAL PURPOSE HOSE NEW SPECIAL CONSTRUCTION

Industries most popular air hose...with millions of feet now in service! A polyester spiral made hose with a smooth red cover and a black oil resistant tube. Handles a wide variety of jobs throughout industry

PART #	I.D.	O.D.	SPIRALS	LBS/C'	W.P.	APPROX. FT
GP-25	1/4	19/32	4	18	300	600
GP-375	3/8	23.32	4	20	300	600
GP-50	1/2	7/8	4	30	300	600
GP-675	5/8	1	4	31	300	600
GP-75	3/4	1-13/16	4	20	300	600
GP-100	1	1-17/16	4	60	300	600
GP-125	1-1/4	1-3/4	4	100	200	300
GP-150	1-1/2	2	4	110	200	300
GP-200	2	2-1/2	4	150	200	100



## ASSEMBLIES

PART #	LENGTH	LENGTH	LENGTH	LENGTH
HOWR	1/4X25'	1/4X50'	1/4X75'	1/4X100'
HOWR	3/8X25'	3/8X50'	3/8X75'	3/8X100'
HOWR	1/2X25'	1/2X50'	1/2X75'	1/2X100'

1/4 AND 3/8 COME WITH 1/4 MP ENDS.

1/2 COMES WITH 1/2 MP ENDS

## PUSH-ON HOSE

Push-on hose handles air, water, oils, solvents and dilute acid solutions... including hot air and oil saturated air. High quality mandrel built construction gives close I.D. tolerances and accurate braid angle for maximum coupling retention. Temperature range is -40 to 212, based on normal operating conditions. Push-on hose eliminates crimping tools, simply cut with a knife and insert coupling. Simplifies maintenance operation. Tube: Nitrile; high quality, maximum oil resistance. Cover; Neoprene, oil and abrasion resistant.

PART #	I.D.	WP/PSI	APPX. FT.
AFH-1/4	1/4	300	600
AFH-3/8	3/8	300	600
AFH-1/2	1/2	300	600
AFH-5/8	5/8	300	600
AFH-3/4	3/4	300	300



## BARRIER HOSE

PART #	I.D.	WP/PSI	APPROX. FT.
BH-316	3/16		
BH-516	5/16		



# H.O.W. RUBBER CATALOG

## RED FLEX TECH

Made in the USA

Rubber-like look and feel enhances flexibility while maintaining durability and cost efficiencies of PVC. Multipurpose applications including air, water (up to 150F) pneumatic tools, air service for painting equipment, coolant lines, etc. -15F to +150F continuous service. Tube: Specially formulated, PVC compound. Reinforcement: High tensile strength textile cord. Cover: Specially formulated, PVC compound available in red, blue, and yellow through 1/2" red and blue only in 5/8" through 1".

PART #	NOM I.D.	NOM. O.D.	MAX. W.P.	WT./FT.	STD. PKG. QTY.
RTR/RTB-025	1/4	.50	300 PSI	.095	500 FT
RTR/RTB-375	3/8	.595	300 PSI	.105	500 FT
RTR/RTB-050	1/2	.785	300 PSI	.132	500 FT
RTR/RTB-675	5/8	.915	300 PSI	.185	500 FT
RTR/RTB-075	3/4	1.070	300 PSI	.290	600 FT
RTR/RTB-100	1	1.44	300 PSI	.450	400 FT

## AIR TOOL HOSE



### RED 300 PSI AIR TOOL HOSE

Specially designed for pneumatic tool service in industrial and general construction service. Has an oil proof tube and cover with 2 braids of nylon. 250 lb working pressure. Coupled with crow foot couplings banded on.

PART #	SIZE
ATH	3/4 X 50'
ATH	3/4 X 100'

### 300 PSI AIR TOOL HOSE

Specially designed with a heat and oil proof tube and cover. Can handle the toughest job. Coupled with crow foot coupling and double banded

PART #	SIZE
ATH	1" X 50'
ATH	1" X 100'

# H.O.W. RUBBER CATALOG

## YELLOW WIRE BRAID AIR AC400



This hose has long been the standard for high pressure air applications. Made with a top grade EPDM tube and a wire carcass for high working pressures. A tough yellow rubber cover provides maximum abrasion resistance. NORMALLY SUPPLIED IN 50' OR 100' LENGTHS. CUT LENGTHS IN INCREMENTS OF 50' ONLY.

Part #	I.D.	SPIRAL	O.D.	Lbs.	W.P.
YWB	3/4	2	1.297	58	800
YWB	1	4	1.594	87	800
YWB	1-1/4	4	1.875	95	700
YWB	1-1/2	4	2.172	120	700
YWB	2	4	2.688	165	700
YWB	2-1/2	4	3.188	220	500
YWB	3	4	3.813	310	500
YWB	4	4	4.875	405	500

## YELLOW RAYON BRAIDED AIR



Top grade compounds as above, but with high tensile rayon cords instead of steel. Same oil proof tube and tough yellow cover, slightly lower working pressure, but more economical too!  
50' or 100' lengths are standard

Part #	I.D.	SPIRAL	O.D.	Lbs.	W.P.
YRSB	3/4	2	1.188	36	250
YRSB	1	2	1.375	45	250
YRSB	1-1/4	4	1.781	70	250
YRSB	1-1/2	4	2.094	91	250
YRSB	2	4	2.625	127	250
YRSB	2-1/2	4	3.125	161	250
YRSB	3	4	3.688	206	200
YRSB	4	4	4.798	325	200

# H.O.W. RUBBER CATALOG

## A I R Q U I C K C O U P L I N G S



### INDUSTRIAL FEMALE SOCKET

PART #	BODY SZ.	THREAD
158	1/4	1/8
150	1/4	1/4
151	1/4	3/8
582	3/8	1/4
580	3/8	3/8
584	3/8	1/2
123	1/2	3/8
120	1/2	1/2



### INDUSTRIAL FEMALE PLUG

PART #	BODY SZ.	THREAD
1509	1/4	1/8
1502	1/4	1/4
1505	1/4	3/8
5804	3/8	1/4
5802	3/8	3/8
5805	3/8	1/2
1204	1/2	3/8
1202	1/2	1/2



### AUTOMOTIVE FEMALE SOCKET

PART #	BODY SZ.	THREAD
160	1/4	1/4
161	1/4	3/8
592	3/8	1/4
590	3/8	3/8



### AUTOMOTIVE FEMALE PLUG

PART #	BODY SZ.	THREAD
1602	1/4	1/4
1605	1/4	3/8
5904	3/8	1/4
5902	3/8	3/8



### INDUSTRIAL MALE SOCKET

PART #	BODY SZ.	THREAD
159	1/4	1/8
152	1/4	1/4
155	1/4	3/8
583	3/8	1/4
581	3/8	3/8
587	3/8	1/2
121	1/2	3/8
122	1/2	1/2



### INDUSTRIAL MALE PLUG

PART #	BODY SZ.	THREAD
1504	1/4	1/8
1501	1/4	1/4
1503	1/4	3/8
5803	3/8	1/4
5801	3/8	3/8
5809	3/8	1/2
1203	1/2	3/8
1201	1/2	1/2



### AUTOMOTIVE MALE SOCKET

PART #	BODY SZ.	THREAD
162	1/4	1/4
165	1/4	3/8
593	3/8	1/4
591	3/8	3/8









### AUTOMOTIVE MALE PLUG

PART #	BODY SZ.	THREAD
1601	1/4	1/4
1603	1/4	3/8
5903	3/8	1/4
5901	3/8	3/8

# H.O.W. RUBBER CATALOG

## A I R Q U I C K C O U P L I N G S

		
<b>LINCOLN FEMALE SOCKET</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
170	1/4	1/4
		
<b>LINCOLN FEMALE PLUG</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
1702	1/4	1/4
		
<b>ARO FEMALE SOCKET</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
140	1/4	1/4
141	1/4	3/8
		
<b>ARO FEMALE PLUG</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
1402	1/4	1/4
1405	1/4	3/8
		
<b>UNIVERSAL SOCKETS</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
150USE	1/4	1/4
580USE	3/8	3/8
120USE	1/2	1/2
		
<b>COILHOSE HIGH FLOW ALL METAL BLOW GUN MODEL TYP 2501 CS.</b>		
<b>Part No.</b>		
TYP2501		

		
<b>LINCOLN MALE SOCKET</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
172	1/4	1/4
		
<b>LINCOLN MALE PLUG</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
1701	1/4	1/4
		
<b>ARO MALE SOCKET</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
142	1/4	1/4
145	1/4	3/8
		
<b>ARO MALE PLUG</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
1401	1/4	1/4
1403	1/4	3/8
		
<b>INDUSTRIAL FEMALE SOCKET BLOWGUN</b>		
<b>Part No.</b>	<b>Body Size</b>	<b>Thread</b>
15CBG4F	1/4	1/4
		
<b>Rubber Tip (Model # 601): Ideal for blowing out molds or any other delicate surface brass tips might damage.</b>		
<b>Part No.</b>		
601		

# H.O.W. RUBBER CATALOG

## A I R A C C E S S O R I E S



**BALL CHUCK**

Part #	SIZE	THREAD
CH10	1/4"	FPT




**BRASS NEEDLE VALVES**

PART #	SIZE	THREAD
46050	1/8"X1/8"	MPTXMPT
46051	1/4"X1/4"	MPTXMPT
46055	1/8"X1/8"	FPTXFPT
46056	1/4"X1/4"	FPTXFPT



**TANK FILLER VALVES**

PART #	SIZE	THREAD
700-1/8	1/8	MNPT
701-1/4	1/4	MNPT
703-1/4	1/4	MXBARB
705-1/4	1/4	FXBARB



**MUFFLER WITH REPLACEABLE ELEMENT**

PART #	THREAD
MF101	1/8" MPT
MF102	1/4" MPT
MF103	3/8" MPT
MF104	1/2" MPT



**BALL CHUCK WITH CLIP**

Part #	SIZE	THREAD
CH09	1/4"	FPT



**DRAIN COCKS**

PART #	THREAD AND SIZE
46074	1/8" NPT 3/16" FLOW PASSAGE
46075	1/4" NPT 1/4" FLOW PASSAGE
46077	3/8" Npt 5/16 Flow Passage



**TRIPOD MANIFOLD**

PART#	SIZE
3002	3 PORT 1/4" INLET
3003	3 PORT 3/8" INLET



**AIR TOOL**

PART #	DESCRIPTION
ATL 016	16 OZ BOTTLE
ATL 128	1 GALLON BOTTLE

# H.O.W. RUBBER CATALOG

**M  
I  
N  
I  
S  
E  
R  
I  
E  
S  
  
F  
R  
L**



**MINIATURE REGULATOR-GAUGE**

PART #	DESCRIPTION
MR-2-G	1/4" (ONLY) 0-160 PSI



**MINIATURE LUBRICATOR**

PART #	DESCRIPTION
ML-2M	1/4" ONLY



**MINIATURE INTEGRAL FILTER/REGULATOR**

PART #	DESCRIPTION
MFC-2-6	1/4" ONLY

# H.O.W. RUBBER CATALOG

2  
7  
  
S  
E  
R  
I  
E  
S  
  
F  
R  
L



### 27 SERIES REGULATORS

PART#	SIZE	DESCRIPTION
27R3-GH	3/8"	27 Series 3/8" Regulator, Gauge, 0-250 psi
27R4-GH	1/2"	27 Series 1/2" Regulator, Gauge, 0-250 psi
27R6-GH	3/4"	27 Series 3/4" Regulator, Gauge, 0-250 psi



### 27 SERIES FILTERS

PART #	SIZE	DESCRIPTION
27F3-DM	3/8"	27 Series 3/8" Filter, Auto Drain, Metal Bowl
27F4-DM	1/2"	27 Series 1/2" Filter, Auto Drain, Metal Bowl
27F6-DM	3/4"	27 Series 3/4" Filter, Auto Drain, Metal Bowl



### 27 SERIES LUBRICATORS

PART#	SIZE	DESCRIPTION
27L3-M	3/8"	27 Series 3/8" Lubricator, Metal Bowl W/ Sight Glass
27L4-M	1/2"	27 Series 1/2" Lubricator, Metal Bowl W/ Sight Glass
27L6-M	3/4"	27 Series 3/4" Lubricator, Metal Bowl W/ Sight Glass

# H.O.W. RUBBER CATALOG

88 SERIES FILTERS



## 88 SERIES REGULATORS

PART#	SIZE	DESCRIPTION
8804GH	3/8"	88 Series 1/2" Regulator, Gauge, 0-250 psi
8806GH	1/2"	88 Series 3/4" Regulator, Gauge, 0-250 psi
8808GH	3/4"	88 Series 1" Regulator, Gauge, 0-250 psi



## 88 SERIES FILTERS






PART #	SIZE	DESCRIPTION
8824MD	3/8"	88 Series 1/2" Filter, Auto Drain, Metal Bowl
8826MD	1/2"	88 Series 3/4" Filter, Auto Drain, Metal Bowl
8828MD	3/4"	88 Series 1" Filter, Auto Drain, Metal Bowl



## 88 SERIES LUBRICATORS

PART#	SIZE	DESCRIPTION
8844M	3/8"	88 Series 1/2" Lubricator, Metal Bowl W/ Sight Glass
8846M	1/2"	88 Series 3/4" Lubricator, Metal Bowl W/ Sight Glass
8848M	3/4"	88 Series 1" Lubricator, Metal Bowl W/ Sight Glass

# H.O.W. RUBBER CATALOG

	
<b>Liquid Teflon</b>	
Part#	Description
Teflon-04oz	4oz of Thread Sealant
Teflon-08oz	8oz of Thread Sealant
Teflon-16oz	16oz of Thread sealant
	
<b>Pipe Joint Compound</b>	
Part#	Description
PipeJointComp	16oz of Pipe Joint Compound
	
<b>Hydraulic Fluid</b>	
Part#	Description
HydFluid	5 Gallons of Hydraulic Fluid
	
<b>Anti-Seize</b>	
Part#	Description
ANTISEIZE-08	8oz of Anti-seize
ANTISEIZE-16	16oz of Anti-seize
	
<b>Teflon Tape</b>	
Part#	Description
Teflon-1/2	1/2" X 260" Teflon
Teflon-3/4	3/4" X 260" Teflon

# GENERAL SUPPLIES

	
<b>WD40</b>	
Part#	Description
WD40	WD40 SPRAY
	
<b>BrakeCleaner</b>	
Part#	Description
BrakeClean	Brake Cleaner Spray
	
<b>Floor Dry</b>	
Part#	Description
FloorDry	50 Lbs of Floor Dry
	
<b>Nitrile Gloves</b>	
Part#	Description
Gloves-NT-M	Medium Nitrile Gloves
Gloves-NT-L	Large Nitrile Gloves
Gloves-NT-XL	X-Large Nitrile Gloves
Gloves-NT-XXL	2 X-Large Nitrile Gloves
	
<b>Jersey Gloves</b>	
Part#	Description
Gloves-JS	1 Dozen Jersey Gloves

# H.O.W. RUBBER CATALOG


## GENERAL SUPPLIES



Grease Lines	
Part#	Description
GWH-12	12" Grease Whip Hose
GWH-18	18" Grease Whip Hose
GWH-24	24" Grease Whip Hose
GWH-36	36" Grease Whip Hose
36220	4JAW Grease Coupling



Diagnostic Kit	
Part#	Description
Diag M16 Kit	M16 DIAG LIQUID GUAGES
Diag M16 Kit-Dig 1	M16 DIAG DIGITAL GUAGES
Diag M16 Kit-Dig 2	M16 DIAG DIGITAL GUAGES

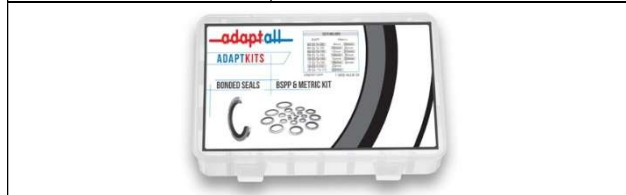

Bonded Seal Kit	
Part#	Description
BDSEAL KIT	Bonded Seal Kit



Air Hose Crimper	
Part#	Description
CV500	Air Hose Manual Crimper



Tool Box Buddy	
Part#	Description
ToolBuddy	Tool Box Buddy 2oz



Joes Hand Cleaner	
Part#	Description
JOES-14	14oz Tube of Joes Cleaner
JOES-64	4Lbs Tub of Joes Cleaner



Cap And Plug Kit	
Part#	Description
Cap Plug Kit-JIC	JIC Cap & Plug Kit
Cap Plug Kit-FF	Flat Face Cap & Plug Kit
Cap Plug Kit-DINH	Din Heavy Cap & Plug Kit
Cap Plug Kit-DINL	Din Light Cap & Plug Kit
Cap Plug Kit-BSPP	BSPP Cap & Plug Kit
Cap Plug Kit-JIS	JIS Cap & Plug Kit



O-Ring Kits	
Part#	Description
KBoss Kit	O-Ring Boss O-ring Kit
KFace Kit	Flat Face O-ring Kit
KFlange Kit	Split Flange O-ring Kit
MORing Kit	Metric O-ring Kit
StOring Kit	Standard O-Ring Kit
XL Kit	X-Large Oring Kit



Wipes	
Part#	Description
Wipes-Sleeve	30 CT Cleaning Wipes
Wipes-TUB	72 CT Cleaning Wipes

# H.O.W. RUBBER CATALOG


## BLUE 4000, GRAY/BLACK 6000 HIGH PRESSURE WASHER HOSE 3000 P.S.I. 250 DEGREES




Our hose has been specially developed for high pressure applications that also involve high temperature. A single wire braid high pressure hose with a black pin-prick cover and a heat resistant tube. An excellent hose for high pressure washers. Available in almost any length and combination of permanently attached fittings.

PART #	I.D.	O.D.	W.P.	BEND RADIUS
SHPWH-B-1W-038	3/8	.68	4000 1-WIRE	4.3 Black
SHPWH-B-2W-038	3/8	.68	6000 2-WIRE	4.7 Black
SHPWH-G-2W-038	3/8	.68	6000 2-WIRE	4.7 Grey

**MALE RIGID**



**MALE SWIVEL**



Have to use bite to wire fittings

Pressure washer hose may be coupled male rigid/male rigid or male rigid/male swivel

### Black 1 Wire Pressure Washer Hose

Part #	I.D.	W.P.	LENGTH
SHPWHA-B-1W-038-25	3/8	4000	25'
SHPWHA-B-1W-038-50	3/8	4000	50'
SHPWHA-B-1W-038-100	3/8	4000	100'
SHPWHA-B-1W-038-200	3/8	4000	200'

### Black 2 Wire Pressure Washer Hose

Part #	I.D.	W.P.	LENGTH
SHPWHA-B-2W-038-25	3/8	6000	25'
SHPWHA-B-2W-038-50	3/8	6000	50'
SHPWHA-B-2W-038-100	3/8	6000	100'
SHPWHA-B-2W-038-200	3/8	6000	200'

### Gray 2 Wire Pressure Washer Hose

Part #	I.D.	W.P.	LENGTH
SHPWHA-G-2W-038-25	3/8	6000	25'
SHPWHA-G-2W-038-50	3/8	6000	50'
SHPWHA-G-2W-038-100	3/8	6000	100'
SHPWHA-G-2W-038-200	3/8	6000	200'

# H.O.W. RUBBER CATALOG



PART #	Description
SFFS-1/4	1/4 FEMALE SOCKET
SFFS-3/8	3/8 FEMALE SOCKET
SFFS-1/2	1/2 FEMALE SOCKET
SFFS-3/4	3/4 FEMALE SOCKET



PART #	Description
SFFP-1/4	1/4 FEMALE PLUG
SFFP-3/8	3/8 FEMALE PLUG
SFFP-1/2	1/2 FEMALE PLUG
SFFP-3/4	3/4 FEMALE PLUG



PART #	Description
86001	M22 SCREW TYPE X 1/4 MNPT
86002	M22 SCREW TYPE X 3/8 MNPT



PART #	Description
86012	M22 INS KNOB X 1/4 MNPT
86013	M22 INS KNOB X 3/8 MNPT



PART #	Description
86022	M22 X M22 UNION

P  
R  
E  
S  
S  
S  
  
W  
A  
S  
H  
E  
R  
  
C  
O  
U  
P  
L  
I  
N  
G  
S  
  
&  
  
A  
D  
A  
P  
T  
E  
R  
S



PART #	Description
SFMS-1/4	1/4 MALE SOCKET
SFMS-3/8	3/8 MALE SOCKET
SFMS-1/2	1/2 MALE SOCKET
SFMS-3/4	3/4 MALE SOCKET




PART #	Description
SFMP	1/4 MALE PLUG
SFMP	3/8 MALE PLUG
SFMP	1/2 MALE PLUG
SFMP	3/4 MALE PLUG



PART #	Description
86005	M22 SCREW TYPE X 1/4 FNPT
86006	M22 SCREW TYPE X 3/8 FNPT



PART #	Description
86017	M22 INS KNOB X 1/4 FNPT
86018	M22 INS KNOB X 3/8 FNPT

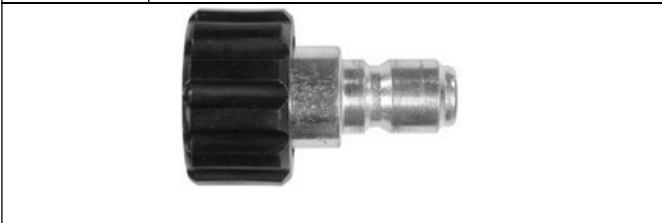

PART #	Description
86020	M22 INS KNOB X QC PLUG



# H.O.W. RUBBER CATALOG

## Lightweight tank truck hose



A GOOD QUALITY HOSE FOR FUEL TANK SERVICE. A SMOOTH BLACK NITRILE TUBE AND COVER. 2-PLY SPIRAL NYLON CORD AND A SPRING STEEL WIRE CARCASS. GOOD FOR BOTH SUCTION AND DISCHARGE SERVICE. A BEAUTIFULLY CONSTRUCTED HOSE WITH A RED STRIPE.

PART #	I.D.	O.D.	SPIRAL	W.P.
R4-075	3/4	1-1/4"	2	300
R4-100	1	1-1/2"	2	250
R4-125	1-1/4	1-3/4"	2	250
R4-150	1-1/2	1-15/16"	2	180
R4-200	2	2-1/2"	2	150
R4-250	2-1/2	2-15/16"	2	150
R4-300	3	3-7/16"	2	150
R4-350	3-1/2	4"	2	150
R4-400	4	4-19/32"	2	100
R4-500	5	5-3/4"	2	150
R4-600	6	6-25/32"	2	100
R4-800	8	8.88"	2	100

## HEAVY DUTY TANK TRUCK HOSE

FARM FUEL TANK HOSE TEMP -40 F TO +200 F (FUEL HOSE) AC309

PART #	I.D.	O.D.	PSI	LBS/100'
R4HD-200	2"		300	.29
R4HD-300	3"		300	.45
R4HD-400	4"		300	

## SPIRALITE 5100 – TANK TRUCK HOSE



THIS HOSE HAS BEEN REDESIGNED AND ENGINEERED WITH A HEAVIER NBR TUBE AND COVER FOR THE PRESSURE, GRAVITY FLOWOR SUCTION MOVEMENT OF GASOLINE AND PETROLEUM BASE PRODUCTS WITH AN AROMATIC CONTENT NOT TO EXCEED 50% AND WITH A STATIC WIRE. SPIRALITE 5000 IS COMPOUNDED ESPECIALLY TO REMAIN FLEXIBLE TO TEMPERATURE READINGS OF -30 DEG. F. EXTREMELY LIGHTWEIGHT FOR EASY HANDLING. AN 18' LENGTH OF 4" WITH IT'S ALUMINUM COUPLINGS WEIGHS LESS THAN 41 LBS.

PART #	I.D.	O.D.	WP @ 72 F	BEND RADIUS	BURST @ 72 F	WT/FT
5100-200	2	2.66	100	3	400	.88
5100-300	3	3.6	65	6	260	1.27
5100-400	4	4.8	65	7.8	260	2.0

# H.O.W. RUBBER CATALOG

## LPG BUTANE – PROPANE HOSE



THIS BUTANE/PROPANE HOSE IS DESIGNED TO TRANSFER LIQUID PETROLEUM GAS AT UP TO 350 PSI. THE SMOOTH BLACK COVER IS PINPRICKED TO PREVENT BLISTERING AND BUBBLING. FOR TRANSFERRING LIQUIFIED PETROLEUM GAS FROM TANK TRUCKS TO COMMERCIAL OR HOME STORAGE TANKS. THIS HOSE MEETS ALL UL REQUIREMENTS. 5 TO 1 SAFETY FACTOR.

PART #	I.D.	O.D.	BRAID	WT/C'	PSI
LPG-025	1/4	.505	2	78	350
LPG-0516	5/16	.560	2	99	350
LPG-038	3/8	.650	2	119	350
LPG-050	1/2	15/16	2	129	350

## LIGHTWEIGHT PETRO CHEMICAL HOSE



A LIGHTWEIGHT CHEMICAL TRANSFER HOSE DESIGNED FOR TRANSFER OF INDUSTRIAL CHEMICALS IN SUCTION, GRAVITY FLOW AND PRESSURE APPLICATIONS. THE UHMV TUBE PROVIDES THE WIDEST RANGE OF USE WITH INDUSTRIAL CHEMICALS. CONSTRUCTION: TUBE IS CLEAR UHMV POLYETHYLENE, REINFORCEMENT: MULTIPLE PLYS OF TIRE CORD AND DUALWIRE HELIX.

GREEN EPDM COVER

LENGTH 100”.

TEMPERATURE RANGE UP TO +200 F

### UHMW CHEMICAL HOSE


PART #	I.D.	O.D.	PLIES	MBR INCHES	WP PSI	WT LBS/FT
UHM-100	1”	1.51	4	6	250	.63
UHM-125	1-1/4”	1.78	4	7	250	.78
UHM-150	1-1/2”	1.99	4	9	250	1.06
UHM-200	2”	2.52	4	11	250	1.33
UHM-250	2-1/2”	3.03	4	12	250	.095
UHM-300	3”	3.65	4	15	250	2.12
UHM-400	4”	4.68	4	20	250	2.83

### XPLE CHEMICAL HOSE

PART #	I.D.	O.D.	PLIES	MBR INCHES	WP PSI	WT LBS/FT
XLP-075	3/4”	1.21	4	5”	250	.32
XPL-100	1”	1.51	4	6”	250	.38
XLP-125	1-1/4”	1.72	4	7”	250	.45
XLP-150	1-1/2”	1.99	4	9”	250	.61
XLP-200	2”	1.52	4	11”	250	.75
XLP-250	2-1/2”	3.03	4	12”	250	.95
XLP-300	3”	3.65	4	15”	250	1.25
XLP-400	4”	4.68	4	20”	250	1.55

# H.O.W. RUBBER CATALOG

## SMOOTH-FLEX PLUS MARINE HARDWALL WATER EXHAUST

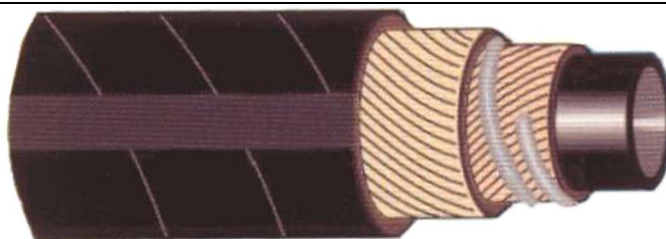

DESIGNED FOR A WIDE RANGE OF DEMANDING ENGINE APPLICATIONS FROM WATER INTAKE AND ENGINE COOLANT TO MARINE WET EXHAUST. ITS WIRE HELIX CONSTRUCTION PROVIDE EXCELLENT FLEXIBILITY AND BEND RADIUS.

ALSO AN EXCELLENT CHOICE FOR BILGE DISCHARGE, TOILET AND HOLDING TANK CONNECTIONS, WATER DISCHARGE AND SCUPPER LINES. MEETS SAE J2006R2 FOR MARINE EXHAUST HOSE.

### CONSTRUCTION:

TUBE: EPDM BLACK.

LENGTH: 50 FT.

REINFORCEMENT: PLIES FABRIC WITH HELIX WIRE.

ENDS PLAIN

COVER: EPDM BLACK.


TEMPERATURE RANGE: -40 F TO +200 F

PART #	I.D.	O.D.	BURST PSI	MBR	WT LBS/FT
FFE-050	1/2	.78	500	2.5	.24
FFE-0675	5/8	.91	450	2.5	.27
FFE-075	3/4	1.06	375	2.5	.29
FFE-078	7/8	1.16	350	3	.34
FFE-100	1	1.28	340	3	.37
FFE-118	1-1/8	1.41	340	3	.41
FFE-125	1-1/4	1.53	325	3	.48
FFE-138	1-5/16	1.63	320	3-1/2	.52
FFE-150	1-3/8	1.69	300	4	.54
FFE-1516	1-1/2	1.81	300	4	.59
FFE-158	1-5/8	1.94	290	5	.62
FFE-175	1-3/4	2.06	290	5	.67
FFE-178	1-7/8	2.19	250	5	.70
FFE-200	2	2.31	250	6	.80
FFE-218	2-1/8	2.44	240	6	.88
FFE-225	2-1/4	2.56	240	6.5	.90
FFE-2375	2-3/8	2.69	235	7	.92
FFE-250	2-1/2	2.81	210	8	1.0
FFE-258	2-5/8	2.94	200	9	1.05
FFE-275	2-3/4	3.06	200	10	1.10
FFE-278	2-7/8	3.19	180	11	1.13
FFE-300	3	3.31	170	13	1.18
FFE-318	3-1/8	3.44	160	15	1.32
FFE-325	3-1/4	3.63	160	15-1/2	1.36
FFE-350	3-1/2	3.81	150	16	1.44
FFE-400	4	4.31	125	18	1.59
FFE-450	4-1/2	4.8	115	24	1.85
FFE-500	5	5.31	100	32	2.04
FFE-600	6	6.31	90	36	2.36

**NON-STOCKED ITEM (AVAILABLE 3 DAY DELIVERY)**

# H.O.W. RUBBER CATALOG

## HOT AIR BLOWER – SMOOTH

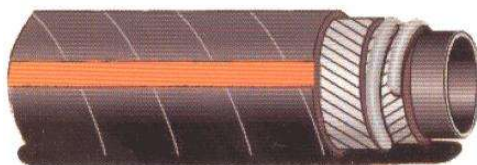

A flexible lightweight hose designed for transferring hot air to tanks on dried bulk materials trucks. EPDM to withstand temperatures up to 325 degrees F on an intermittent basis.

**Construction:**

**Tube:** EPDM

**LENGTH:** 100 ft.

**Reinforcement:** Multiple plies of tire cord with wire helix.

**Max. Temperature:** -40 to 300 degrees F

**Cover:** Heat-resistant synthetic rubber

PART #	I.D.	O.D.	PLIES	W.P. PSI	WT. LBS/FT
HBH	2	2.50	2	200	1.19
HBH	3	3.57	2	125	1.88
HBH	4	4.57	2	95	2.78

## HOT TAR AND ASPHALT



Designed for the transfer of tar, asphalt, hot oils and other high temperature petroleum based products.

**Construction:**

**Tube:** Black high grade nitrile rubber

**Length:** 100 ft.


**Reinforcement:** Plies of polyester tire cord with helix wire.

**Temperature Range:** up to 300 degrees F

PART #	I.D.	O.D.	PLIES	W.P. PSI	WT. LBS/FT
HTAH	3/4	1.0	2	200	.59
HTAH	1	1.55	2	200	.72
HTAH	1-1/2	2.15	2	150	.99
HTAH	2	2.58	2	150	1.44
HTAH	2-1/2	3.22	4	200	2.15
HTAH	3	3.75	4	200	2.63
HTAH	4	4.79	4	150	3.94

# H.O.W. RUBBER CATALOG

## STEAM HOSE



A steel cord carcass over a highly heat resistant EPDM (Ethylene-Propylene-Diene-Terpolymer) tube with a red or black oil resistant synthetic rubber cover. A fine hose for high temperature service (50 foot lengths).

### 250 PSI STEEL CORD 450 DEGREE F

PART #	SIZE	SPIRALS	O.D.	Lbs. per 100 feet
STH	1/2	4	1-1/32	42
STH	3/4	4	1-9/32	53
STH	1	4	1-5/8	85
STH	1-1/4	4	1-51/84	101
STH	1-1/2	4	2-5/32	116
STH	2	4	2-3/64	156

## WHITE MOLDED CREAMERY HOSE



A special purpose hose for washing down floors and equipment in all types of food processing and beverage plants. White cover resists animal fats, vegetable oils, ozone and exposure to sunlight. Especially good for hot water discharge service.

PART #	I.D.	O.D.	WT. PER 100 FEET
WCH	1/2"	.83	24
WCH	3/4"	1-9/32	51

## HEAVY DUTY WASH DOWN HOSE

### CONTRACTORS WATER HOSE



150 PSI

Specially designed for wash down service using city water pressure where garden hose is not heavy enough. Can be used for hot or cold water applications. Coupled with heavy duty cast brass GHT couplings and ferruled on.

PART #	I.D. X LENGTH	PART #	I.D. X LENGTH
CWH	5/8X25'	CWH	3/4X25'
CWH	5/8X50'	CWH	3/4X50'
CWH	5/8X75'	CWH	3/4X75'
CWH	5/8X100'	CWH	3/4X100'

# H.O.W. RUBBER CATALOG

## SPRING WIRE SUCTION HOSE



Food and beverage dispensing coolant, oil and fuel lines, non-toxic formulation conforming to FDA requirements.  
Temperature Range +20 degree F to -150 degree F

PART #	I.D.	O.D.	Lbs./100'	MAX. W.P. @ 70 DEG.
SF60	1/4	1/2	9	210
SF60	3/8	5/8	13	150
SF60	1/2	13/16	21	150
SF60	5/8	1	32	100
SF60	3/4	1-1/8	35	100
SF60	1	1-3/8	44	84
SF60	1-1/4	1-3/4	72	84
SF60	1-1/2	2	86	84
SF60	2	2-1/2	108	70

## POLYESTER BRAIDED VINYL TUBING



LIGHTWEIGHT -FLEXIBLE- ALL VIRGIN POLYVINYL CHLORIDE- CLEAR TUBE AND COVER. SINGLE PLASTIC MASS  
CONSTRUCTION REINFORCED WITH BRAIDED VINYL

PART #	I.D.	O.D.	PSI
BVT	1/4	.433	250
BVT	3/8	.591	200
BVT	1/2	.709	200
BVT	5/8	.861	200
BVT	3/4	1.024	150
BVT	1	1.299	125
BVT	1-1/4	1.325	100
BVT	1-1/2	2	75
BVT	2	2.250	75

## EPDM SUCTION HOSE



THIS HOSE WAS DESIGNED FOR AGRICULTURAL USE. THIS HOSE IS EXCELLENT WHEN USED WITH AGRICULTURAL CHEMICALS, ALSO GREAT FOR INDUSTRIAL, CONSTRUCTION AND MINING USE. HOSE STAYS FLEXIBLE IN WINTER CONDITIONS. HIGH QUALITY EPDM WITH A POLYETHYLENE HELIX.

PART #	I.D.	O.D.	WP @ 68 deg. F	VAC. RATING	BEND RADIUS
EPDM	1-1/2	1.96	60	28	6
EPDM	2	2.49	60	28	9
EPDM	2-1/2	3.00	50	28	11
EPDM	3	3.60	50	28	12
EPDM	4	4.69	45	28	17

# H.O.W. RUBBER CATALOG

## CLEAR VINYL TUBING



LIGHTWEIGHT, CLEAR, ALL VIRGIN POLYVINYL CHLORIDE. RESISTS ABRASIONS, OZONE, CORROSION, CHEMICALS, SELF-EXTINGUISHING. TRANSPARENCY PERMITS VISUAL INSPECTION OF MATERIAL FLOW, AND ITS RESISTANCE TO OZONE MAKES IT SUITABLE TO BOTH INDOOR AND OUTSIDE USE. (FDA GRADE).

PART #	I.D.	WALL	O.D.	FT/BOX
CVT	1/8	1/16	1/4	100'
CVT	3/16	1/16	5/16	100'
CVT	1/4	1/16	3/8	100'
CVT	1/4	1/8	1/2	100'
CVT	5/16	1/16	7/16	100'
CVT	5/16	3/32	1/2	100'
CVT	3/8	1/16	1/2	100'
CVT	3/8	1/8	5/8	100'
CVT	1/2	1/16	5/8	100'
CVT	1/2	1/8	3/4	100'
CVT	5/8	1/8	7/8	100'
CVT	3/4	1/8	1	100'
CVT	7/8	1/8	1-1/8	100'
CVT	1	1/8	1-1/4	100'
CVT	1-1/4	1/4	1-3/4	100'
CVT	1-1/2	1/4	2	100'
CVT	2	3/16	2-3/8	100'

### 320 ORANGE PVC SPRAY HOSE



AGRICULTUR SPRAY SUCH AS INSECTICIDES AND FERTILIZERS. WATER, COMPRESSED AIR, LIGHT CHEMICAL SOLUTIONS, PEST CONTROL, ETC. WORKING PRESSURE AT 70 DEGREE F- 580 PSI (COMES IN 300' AND 400' COILS)

PART #	I.D.	WT/ROLL	W.P.
320S-6	3/8	37	560
320-8	1/2	53	560
320-12	3/4 FULL ROLLS ONLY	80	560

### 340 HIGH PRESSURE GREEN SPRAY HOSE



AGRICULTURE SPRAY WHERE 800 PSI IS NEEDED. FERTILIZER, LIGHT CHEMICAL AND PEST CONTROL. BEST HOSE ON THE MARKET FOR ITS JOB. (THIS HOSE IS SOLD IN 300' COILS ONLY.)

PART #	I.D.	LBS/ROLL	W.P.
340	3/8	41	800
340	1/2	54	800
340	3/4	91	800
340	1	135	800

# H.O.W. RUBBER CATALOG


## PVC SUCTION HOSE



AN ALL POLY VINYL CHLORIDE (PLASTIC) SUCTION HOSE SMOOTH BORE, EASY TO HANDLE. MADE WITH TOUGH PVC HELIX FUSED INSIDE A PLIABLE PLASTIC WALL THAT SURROUNDS IT ON ALL SIDES. RECOMMENDED FOR CONSTRUCTION=IRRIGATION-AGRICULTURAL-INDUSTRIAL AND SANITATION SERVICES. YOU WILL NOT FIND A BETTER PVC SUCTION ON THE MARKET.

PART #	I.D.	O.D.	Lbs./100'	W.P. 68 DEGREES
PVCGD	3/4			
PVCGD	1"	1-15/64	26	90
PVCGD	1-1/4	1-17/32	37	90
PVCGD	1-1/2	1-27/32	55	90
PVCGD	2	2-3/8	85	70
PVCGD	2-1/2	2-29/32	202	65
PVCGD	3	3-15/32	232	55
PVCGD	4	4-19/32	302	50
PVCGD	5			
PVCGD	6	6-21/32	337	45
PVCGD	8	8-27/32	580	40

## CLEAR PVC SUCTION

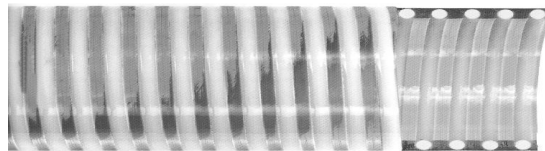


HIGHQUALITY FLEXIBLE AND GOOD ADHESION BETWEEN SOFT WALL AND HELIX DUE TO SIMULTANEOUS EXTRUSION. AVAILABLE IN SIZES FROM 3/4' TO 12" I.D. APPLICATION-WATER AND LIGHT CHEMICAL SOLUTIONS

PART#	I.D.	O.D.	Lbs. /100'	W.P. @ 68 DEGREE F	PRICE
PVCCS	3/4	1	20	100	3.13
PVCCS	1	1.25	27	100	3.28
PVCCS	1-1/4	1.50	34	60	3.90
PVCCS	1-1/2	1.84	47	60	5.08
PVCCS	2	2.37	67	40	7.38
PVCCS	2-1/2	2.90	94	32	10.43
PVCCS	3	3.46	123	55	11.70
PVCCS	4	4.53	189	50	18.88
PVCCS	6	6.78	448	45	44.50

# H.O.W. RUBBER CATALOG

## SUPER GRAY DISCHARGE



AN ALL PVC AND COVER OVER AN ALL NYLON WOVEN BRAID. LIGHT WEIGHT, TOUGH, AND VERY ECONOMICAL FOR ALL WATER SERVICES. WILL NOT ROT OR MILDEW, FOLDS FLAT FOR EASY STORAGE

PART #	I.D.	APPX. WT. LB/FT	MAX. 70 DEGREE W.P.
PVCGD	3/4	.061	140
PVCGD	1	.087	110
PVCGD	1-1/4	.116	80
PVCGD	1-1/2	.117	70
PVCGD	2	.224	65
PVCGD	2-1/2	.247	55
PVCGD	3	.313	55
PVCGD	4	.414	50
PVCGD	6	.725	35
PVCGD	8	1.142	35
PVCGD	10	1.814	30
PVCGD	12	2.134	30
PVCGD	14	2.5	30

## EXTRA HEAVY DUTY RED PVC DISCHARGE



THE HEAVIEST DISCHARGE HOSE MADE FOR THE MINE INDUSTRY (USMSHA 2G-26G/1).

PART #	I.D.	Lbs./300FT	W.P.
PVCRD	1-1/2	80	150
PVCRD	2	103	150
PVCRD	2-1/2	119	150
PVCRD	3	164	150
PVCRD	4	254	150
PVCRD	6	400	150
PVCRD	8	566	150
PVCRD			
PVCRD			

# H.O.W. RUBBER CATALOG

## BRAIDED CLEAR PVC CORRUGATED HOSE



CLEAR PVC WITH CORRUGATED ORANGE HELIX CONTAINING A BRAIDED REINFORCEMENT

PART #	NOMINAL SZ.	APX. O.D.	RECOM. W.P. @ 68 DEGREE F PSI	APPX. B.P. @ 68 DEG F	VACUUM RATE @ 68 DEGREE F	RECOM. MIN. BEND RADIUS	APPX. WT. LBS/FT
6200	1-1/2"	1.89"	100	280	28	4"	.36
6200	2"	2.45"	100	280	28	5"	.54
6200	3"	3.61"	100	280	28	7"	1.07
6200	4"	4.73"	75	200	28	8"	1.74
6200	6"	7.13"	70	180	28	12"	3.81
6200	8"	8.87"	60	120	28	17"	4.25

## BLACK RUBBER WATER SUCTION HOSE



A TWO PLY HOSE WITH A TOUGH STEEL WIRE BETWEEN THE PLYS TO GIVE GOOD SERVICE IN BOTH SUCTION AND DISCHARGE APPLICATIONS. SMOOTHSBR TUBE AND COVER

PART #	I.D.	O.D.	PLY	Lbs/100'
BRS	1-1/4	1-5/8	2	65
BRS	1-1/2	1-7/8	2	76
BRS	2	2-3/8	2	97
BRS	2-1/2	3	2	167
BRS	3	3-1/2	2	206
BRS	3-1/2	4	2	254
BRS	4	4-3/16	2	363
BRS	5	5-3/4	2	500
BRS	6	6-3/4	2	600
BRS	8	9-5/16	2	1344
BRS	10	11-3/8	2	1687
BRS	12	13-3/8	2	2003

# H.O.W. RUBBER CATALOG

## BLACK RUBBER DISCHARGE



FOR APPLICATIONS WHERE A QUALITY PRODUCT IS REQUIRED. HAS SMOOTH BLACK RUBBER TUBE AND COVER, WITH HEAVY FABRIC CARCASS. CAN BE USED FOR A VARIETY OF APPLICATIONS.

PART #	I.D.	PLY	LBS./100'	W.P.
BRD	1-1/2	4	93	200
BRD	2	2	118	150
BRD	2-1/2	2	144	100
BRD	3	2	134	100
BRD	3-1/2	2	179	100
BRD	4	2	179	100
BRD	4-1/2	4	237	100
BRD	5	4	287	100
BRD	6	4	307	100

## INDUSTRIAL VACUUM AND DUCTING HOSE



MATERIAL: THERMO PLASTIC RUBBER WITH WIRE ENCAPSULATED EXTERNAL WEAR STRIP, SIZE: 1-1/4" TO 24", TEMPERATURE RANGE: -40 DEGREE F TO 275 DEGREE F CONTINUOUS, 300 DEGREE F INTERMITTENT. LENGTHS 25 FT AND 50 FT. COMPRESSION RATIO 2:1. BLACK AND BLACK WITH YELLOW STRIPE.

PART #	SIZE	PART #	SIZE	PART#	SIZE
IVDH		TPR450	4-1/2"	TPR1400	14"
TPR150	1-1/2"	TPR500	5"	TPR1600	16"
TPR200	2"	TPR600	6"	TPR1800	18"
TPR250	2-1/2"	TPR700	7"	TPR2000	20"
TPR300	3"	TPR800	8"		
TPR325	3-1/2"	TPR1000	10"		
TPR400	4"	TPR1200	12"		

## BULKMASTER MATERIAL HANDLING HOSE



DESIGNED FOR CARRYING A WIDE RANGE OF DRY POWDERS UNDER LOW PRESSURE. CONSTRUCTION OF A 4-PLY HEAVY DUTY SYNTHETIC TEXTILE YARN. 3/16 TUBE ANTI-STATIC NATURAL RUBBER COMPOUND TO RESIST CUTTING ACTION OF ABRASIVES.

PART #	DESCRIPTION
BMD	4" X 1/8" WALL
BMD	4" X 1/4" WALL
BMD	5" X 1/4" WALL
BMS	4" SUCTION
BMS	5" SUCTION

# H.O.W. RUBBER CATALOG

## SPIRALITE 1100



THIS HOSE IS IDEAL FOR DRY MATERIAL HANDLING SUCH AS CRUSHED ROCK, SAND, PEA GRAVEL, CEMENT, IRON ORE, GRAINS AND ANY OTHER SUBSTANCE WHERE HIGH ABRASION IS A FACTOR. TEMPERATURE RANGE IS -30 DEGREE F TO 140 DEGREE F

PART #	I.D.	O.D.	W.P.	VAC. RATING	BEND RAD.	WEIGHT/FT.
1100	1-1/2	1.86	45	28	3"	.38
1100	2	2.41	40	28	4"	.55
1100	2-1/2	2.98	35	28	5"	.79
1100	3	3.54	35	28	6"	1.29
1100	3-1/2	3.55	35	28	7"	1.40
1100	4	4.65	30	28	8"	1.70
1100	5	5.7	35	28	9"	2.43
1100	6	6.88	27	28	12"	3.24
1100	8	9.10	25	28	16"	5.93

## PURE GUM SLEEVES

OUR PURE GUM SLEEVES ARE MADE OF THE BEST 1/4" TAN GUM RUBBER PRODUCED IN THE U.S.A. TOUGH AND FLEXIBLE. WE ONLY MAKE THEM TO ORDER AND PLEASE ALLOW TWO DAYS FOR DELIVERY. SIZES AVAILABLE FROM A 6" I.D. UP TO A 24" AND UP TO 48" LONG. ALLOW 2 DAYS FOR MANUFACTURING.

# H.O.W. RUBBER CATALOG

## INDUSTRIAL MILL HOSE



A LIGHTWEIGHT, EASY-TO-HANDLE GENERAL PURPOSE HOSE FOR CLEAN-UP AND WASH-DOWN FACTORIES AND MILL YARDS. IS IDEAL FOR INDUSTRIAL DISCHARGE HOSE. ITS ALL POLYESTER CONSTRUCTION WILL NOT MILDEW OR DECAY WITH AGE. POPULAR AS AN INDUSTRIAL PLANT FIRE HOSE AND CONTRACTORS WATER DISCHARGE HOSE. (50 OR 100 FT. LENGTHS – OTHER LENGTHS, PLUS 15%)


### SINGLE JACKET MILL HOSE

PART #	I.D.	LBS/100'	WORKING PRESSURE
SJ-150	1-1/2	30	150
SJ-200	2	40	150
SJ-250	2-1/2	50	150
SJ-300	3	64	150
SJ-400	4	100	150

### DOUBLE JACKET MILL HOSE

PART #	I.D.	LBS/100'	WORKING PRESSURE
DJ-150	1-1/2	30	300
DJ-200	2	40	300
DJ-250	2-1/2	50	300
DJ-300	3	64	300
DJ-400	4	100	300

## INDUSTRIAL FIRE HOSE (RED DURAMASTER)

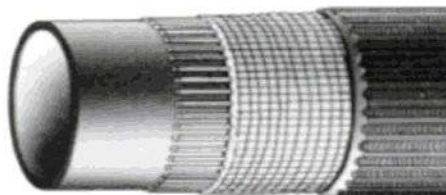

OUR AG INDUSTRIAL FIRE HOSE WORKS AS AN EXCELLENT DISCHARGE HOSE WITH WORKING PRESSURES OF UP TO 300 LBS. IT HAS THE FLEXIBILITY OF A PVC DISCHARGE WITH THE ABRASION RESISTANCE OF THE CONVENTIONAL RUBBER CONSTRUCTION. IT IS MADE OUT OF SYNTHETIC WOVEN TEXTILE. IT'S EXCELLENT DURABILITY IS DERIVED FROM A HIGH TENSILE RUBBER COMPOUND WHICH COMPLETELY ENCASES THE JACKET. AVAILABLE IN 50 AND 100 FT. LENGTHS

PART #	DESCRIPTION	I.D.	W.P.
IDFH-150-100-MF-NPSH-AL	1-1/2" Red duramaster 100' MxF NPSH Assembly	1-1/2	300
IDFH-150-100-MF-NST-AL	1-1/2" Red duramaster 100' MxF NST Assembly	2	300
IDFH-150-50-MF-NPSH-AL	1-1/2" Red duramaster 50' MxF NPSH Assembly	2-1/2	300
IDFH-150-50-MF-NST-AL	1-1/2" Red duramaster 50' MxF NST Assembly	3	300

# H.O.W. RUBBER CATALOG

## Expansion Rocker Lugs



### ALUMINUM ROCKER LUG

### BRASS EXPANSION RINGS

PART#	DESCRIPTION	PART#	DESCRIPTION
HOW-354AL-10	1 1/2"NST X 1 3/4"	HOW-129-15	1 1/2" X 3/4"
HOW-354AL-15	1 1/2"NPSH X 1 3/4"	HOW-129-20	1 1/2" X 1"
HOW-354AL-10	1 1/2"NST X 1 15/16"	HOW-129-25	1 1/2" X 1 1/4"
HOW-354AL-18	2"NPSH X 2 3/16"	HOW-129-30	2" X 1"
HOW-354AL-21	2"NST X 2 3/16"	HOW-129-35	2" X 1 1/4"
HOW-354AL-24	2"NST X 2 5/16"	HOW-129-40	2 7/16" X 1 1/4"
HOW-354AL-36	2 1/2"NPSH X 2 3/4"	HOW-129-45	2 7/16" X 1 1/2"
HOW-354AL-42	2 1/2"NST X 2 3/4"		
HOW-354AL-45	2 1/2"NST X 2 3/16"		
HOW-354AL-51	2 1/2"NPSH X 2 13/16"		
HOW-354AL-52	2 1/2" NST X 2 15/16"		

## ALUMINUM PIN LUGS



### Female NST Pin lug

### Male NST Pin Lug

PART#	DESCRIPTION	PART#	DESCRIPTION
PL-150-NST-F	1-1/2" NST PIN LUG FEMALE	PL-150-NST-F	1-1/2" NST PIN LUG MALE
PL-250-NST-F	2-1/2" NST PIN LUG FEMALE	PL-250-NST-F	2-1/2" NST PIN LUG MALE


### Female NPSH Pin Lug

### Male NPSH Pin Lug

PART#	DESCRIPTION	PART#	DESCRIPTION
PL-150-NPSH-F	1-1/2" NPSH PIN LUG FEMALE	PL-150-NPSH-M	1-1/2" NPSH PIN LUG MALE
PL-200-NPSH-F	2" NPSH PIN LUG FEMALE	PL-200-NPSH-M	2" NPSH PIN LUG MALE
PL-250-NPSH-F	2-1/2" NPSH PIN LUG FEMALE	PL-250-NPSH-M	2-1/2" NPSH PIN LUG MALE
PL-300-NPSH-F	3" NPSH PIN LUG FEMALE	PL-300-NPSH-M	3" NPSH PIN LUG MALE
PL-400-NPSH-F	4" NPSH PIN LUG FEMALE	PL-400-NPSH-M	4" NPSH PIN LUG MALE
PL-600-NPSH-F	6" NPSH PIN LUG FEMALE	PL-600-NPSH-M	6" NPSH PIN LUG MALE

# H.O.W. RUBBER CATALOG

## TAPERED BRASS NOZZLE

	PART #	SIZE	THREAD	Length	DISCHARGE
	TBN	075	NPSH OR GHT		1/4"
	TBN	100	NPSH OR NST	8"	5/16"
	TBN	125	NPSH OR	10"	3/8"
	TBN	150	NPSH OR NST	12"	1/2"
	TBN	200	NPSH OR NST	12"	9/16"
	TBN	250	NPSH OR NST	12"	1"

## PLASTIC FOG NOZZLE



## BRASS FOG NOZZLE



PART #	SIZE	THREAD	PART #	SIZE	THREAD
PFN075GHT	3/4"	GHT	BFN100NPSH	1"	NPSH
PFN100NPSH	1"	IPT	BFN150NPSH	1 1/2"	NPSH
PFN100NST	1"	NST	BFN150NST	1 1/2"	NST
PFN150NPSH	1 1/2"	IPT	BFN250NPSH	2 1/2"	NST
PFN150NST	1 1/2"	NST			
PFN200NPSH	2"	NPSH/IPT			

## HYDRANT WRENCH



## SPANNER WRENCH



PART #	SIZE	PART#	SIZE
HYDW		SW-150	1-1/2"
		SW-200	2"
		SW-250	2-1/2"
		SW-300	3"
		SW400	4"



(OKC) FEMALE SWIVEL X MALE HYDRANT ADAPTERS		(OKC) RIGID FEMALE X MALE ADAPTERS	
PART#	DESCRIPTION	PART#	DESCRIPTION
250FOKCX200MNPT-SW	2-1/2" FOKC X 2" MNPT	250FOKCX075FGHT	2 1/2" FOKC X 3/4" MGHT
250FOKCX250MNPT-SW	2-1/2" FOKC X 2-1/2" MNPT	250FOKCX100MNPT	2 1/2" FOKC X 1" MNPT
250FOKCX250MNST-SW	2-1/2" FOKC X 2-1/2" MNST	250FOKCX150MNPT	2 1/2" FOKC X 1 1/2" MNPT
250FOKCX300NPT-SW	2-1/2" FOKC X 3" MNPT	250FOKCX200MNPT	2 1/2" FOKC X 2" MNPT
250FNSTX250MOKC-SW	2-1/2" FNST X 2-1/2" MOKC	250OKCCAP	2 1/2" OKC CAP
		250OKCPLUG	2 1/2" OKC PLUG

# H.O.W. RUBBER CATALOG

## HYDRANT ADAPTERS



**Double Male Hex Nipple**

**Female NST x Male Reducer**

Part #	Description	Part #	Description
150MNSTX150MNST	1 1/2"MNSTX1 1/2"MNST	150FNSTX150MNPT	1 1/2"FNSTX1 1/2"MNPT
150MNSTX150MNPT	1 1/2"MNSTX1 1/2"MNPT	150FNPSHX150MNST	1 1/2"FNPSHX1 1/2"MNST
250MNPTX150MNPT	2 1/2"MNPTX1 1/2"MNST	250FNSTX75MNPT	2 1/2"FNSTX3/4"MNPT
250MNSTX150MNPT	2 1/2"MNSTX1 1/2"MNPT	250FNSTX75MGHT	2 1/2"FNSTX3/4MGHT
250MNSTX150MNST	2 1/2"MNSTX1 1/2"MNST	250FNPSHX150MNST	2 1/2"FNPSHX1 1/2"MNST
250MNSTX200MNST	2 1/2"MNSTX2"MNST	250FNSTX150MNPT	2 1/2"FNSTX1 1/2"MNPT
250MNSTX200MNPT	2 1/2"MNSTX2"MNPT	250FNSTX150MNST	2 1/2"FNSTX1 1/2"MNST
250MNSTX250MNPT	2 1/2"MNSTX2 1/2"NPT	250FNSTX200MNPT	2 1/2"FNSTX2"MNPT
250MNSTX250MNST	2 1/2"MNSTX2 1/2"MNST	250FNSTX200MNST	2 1/2"FNSTX2"MNST
300MNPTX250MNST	3"MNPTX2 1/2"MNST	250FNSTX250MNPT	2 1/2"FNSTX2 1/2"MNPT
400MNSTX400MNPT	4"MNSTX4"MNPT	250NPSHX250MNST	2 1/2"NPSHX2-1/2"MNST
450MNSTX400MNPT	4 1/2"MNSTX4"NPT	300MNPTX250MNST	3"FNPTX2 1/2"MNST



**FEMALE X FEMALE BRASS SWIVELS**


**FEMALE SWIVEL X MALE SWIVEL**

Part #	Description	Part #	Description
150FNSTX150FNST	1 1/2"FNSTX1 1/2"FNST	250FNSTX200MNPT-SW	2 1/2"FNSTX2"MNPT
150MNPTX150FNST	1 1/2"FNPTX1 1/2"FNST	250FNSTX250MNPT-SW	2 1/2"NSTX2 1/2"MNPT
250FNPTX250FNST	2 1/2"FNPTX2 1/2"FNST	250FNSTX300MNPT-SW	2 1/2"FNSTX3"MNPT
250FNSTX250FNST	2 1/2"FNSTX2 1/2"FNST		



**FEMALE X MALE HEX NIPPLE - BRASS**

**DOUBLE MALE PINLUG-BRASS**

Part #	Description	Part #	Description
75FGHTX100MNPT	3/4"FGHTX1"MNPT	150MNPSHX150MNPSH	1 1/2"MNPSHX1 1/2"MNPSH
100FNPTX75MGHT	1"FNPTX3/4"MGHT	250MNPSHX250MNPT	2 1/2"MNPSHX2 1/2"MNPT
150FNSTX100MNPT	1 1/2"FNSTX1"MNPT	250MNPSHX250MNST	2 1/2"MNPSHX2 1/2"MNST
150FNPTX150MNST	1 1/2"FNPTX1 1/2"MNST		
150FNSTX150MNPT	1 1/2"FNSTX1 1/2"MNPT		
250FNPTX150MNST	2 1/2"FNPTX1 1/2"MNST		
250FNSTX150MNST	2 1/2"FNSTX1 1/2"MNST		
250FNSTX200MNPT	2 1/2"FNSTX2"MNPT		
150FNPTX150MNPT	1 1/2"FNPTX1"MNPT	<b>HEX FEMALE X MALE ADAPTER - BRASS</b>	
250FNSTX250MNST	2 1/2"FNSTX2 1/2"MNST	Part #	Description
250FNSTX250MNPT	2 1/2"FNSTX2 1/2"MNPT	150FNSTX200MNST	1 1/2"FNSTX2"MNST
250FNPTX250MNST	2 1/2"FNPTX2 1/2"MNST	150FNSTX250MNST	1 1/2"FNSTX2 1/2"MNST
250FNPTX250MNST	2 1/2"FNPTX2 1/2"MNST	150FNPTX250MNST	1 1/2"FNPTX2 1/2"MNST
300FNPTX250MNST	3"FNPTX2 1/2"MNST	200FNPTX250MNST	2"FNPTX2 1/2"MNST
400FNSTX250MNST	4"FNSTX2 1/2"MNST	250FNSTX300MNPT	2 1/2"FNSTX3"MNPT
450FNSTX250MNST	4 1/2"FNSTX2 1/2"MNST	400FNPTX450MNST	4"FNPTX4 1/2"MNST

# H.O.W. RUBBER CATALOG

## HYDRANT VALVES & ADAPTERS



**FEMALE X MALE ANGLE HOSE VALVE - BRASS**

**NST CAP AND PLUG**

Part #	Description	Part #	Description
AHV-150	1 1/2"FNPTX1 1/2"MNST	150NSTCAP	1 1/2" NST
AHV-250	2 1/2"FNPTX2 1/2"MNST	250NSTCAP	2 1/2" NST
		150NSTPLUG	1 1/2" NST
		250NSTPLUG	2 1/2" NST



**LEADER LINE SIAMESE QUARTER TURN BALL TYPE-BRASS**

**HYDRANT GATE VALVE - CAST BRASS**

Part #	Description	Part #	Description
SYV-250-150	2 1/2"X1 1/2"X1 1/2" NST	HGV-250NST	2 1/2"FNST SWIVELX2 1/2"MNST