# LIFT DIVISION V3 JANUARY 2019 BALLYNORRE DIVISION ELEVATION THROUGH INNOVATION

ALLYMOR







# ELEVATION THROUGH INNOVATION

# IN 1945

Ballymore began manufacturing rolling safety ladders. We have committed ourselves to quality construction, innovative product development, and world class customer service ever since. & INNOVATION CENTER

# TODAY

Ballymore manufactures ladders and lifts in our factories in Pennsylvania and China.

#### MORE CAPACIT **NEW MANUFACTURING**

 EXPANDED PRODUCTION & **DISTRIBUTION CAPACITY** 

 INCREASED CUSTOM ENGINEERING **CAPABILITIES** 

In 2017, Ballymore grew our lift operations with the establishment of a dedicated "Lift Division", to support our expansion in the aerial lift market.

> **Coatesville, PA** Lift Division

**Coatesville, PA Headquarters** 

BALLYMORE



# WHY BALLYMORE?

- Ballymore Provides Vertical Access Products To A Wide Array Of Industries:
  - Industrial and Manufacturing Companies
  - Aircraft Manufacturing and Maintenance
  - Construction Companies
  - Rental Companies
  - Transportation Industry
  - Warehouse and Distribution Operations
  - Big Box and Mid-Size Retail
- Ballymore's Customer List Includes Some Of The Biggest and Best Companies In The Country
- Ballymore Has Built Its Reputation On:
  - Trust, Honesty, and Doing The Right Thing!
  - Exceptional Quality
  - Durable Product We Have Lifts In The Field For Decades
  - Safety Record Best In The Industry All Products Meet Or Exceed Required Safety Standards
  - Service Before and After The Sale
    - Manuals and Training Material Available For All Lifts
    - Field Tech Support
    - Replacement Parts In Stock
- Need A Custom Lift To Fit Your Specific Operational Challenge? Ballymore Will Design, Build, And Certify It. Don't Settle For Something That Almost Satisfies Your Need, Call Ballymore and Get Exactly What You Need.

# TABLE OF CONTENTS

Ballymore Scissor Lift Line-up 4-5	
Mini Scissor Lifts 6	
Vertical Mast Lifts	
MR Lift 8	
Power Stocker Lifts9BMML-9 Lift10	
Fork Deck 10	
Portable Loading Dock 11	
BallyPal Pallet Products 12-13	
Custom Ladders and Work Platforms 14-15	



#### **PARTNERSHIP COMMITMENT**

Ballymore will work closely with you to collaboratively develop sales opportunities which include the design and engineering of custom vertical access solutions. We pride ourselves in being a supplier of both standard and custom ladders and lifts.

## **BALLYMORE DRIVABLE**



# **D.C. Slab Scissor Lift**





Gradeability **Compact Form** 610.593.5062 • 800.762.8327 • WWW.BALLYMORE.COM




Industrial Grade Weld



**O° Turn Radius** 

#### **SCISSOR LIFT LINE-UP**

Blyne

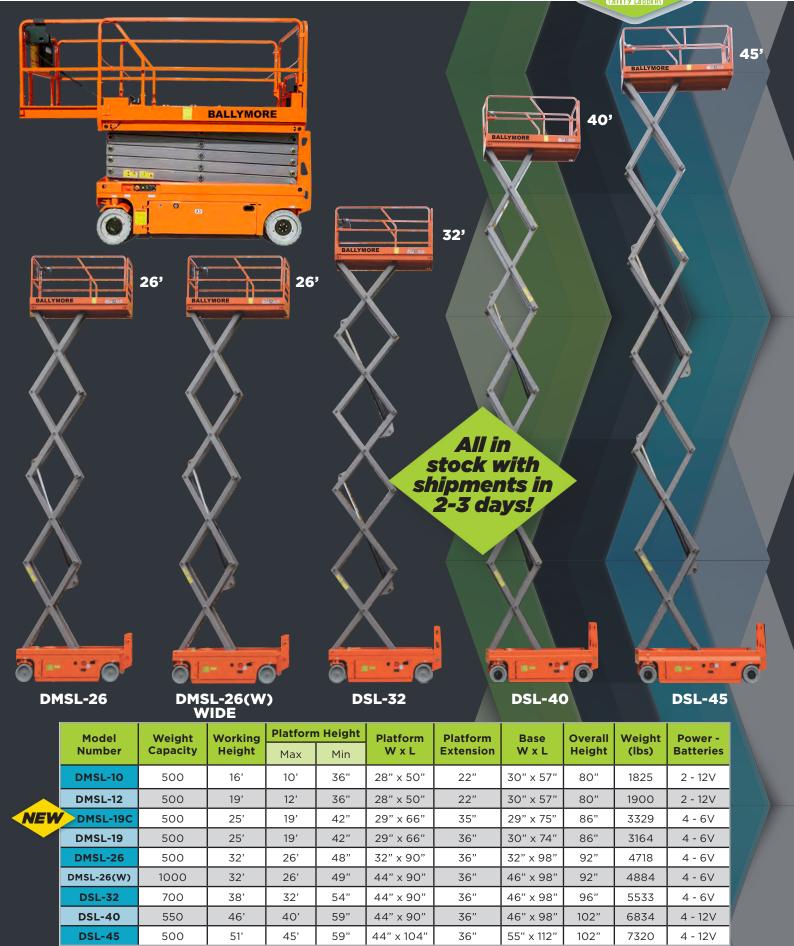

5



### **MINI SCISSOR LIFTS**

#### **PUSH & DRIVABLE**

- Features: Extendable Roll-Out Cantilever Platform On Drivable Model Drivable At Full Heights Self-Locking Safety Gate Emergency Stop Button Emergency Lowering System Forklift Pockets Bowder Coat finish

NEW

 Powder Coat finish • Maximum Occupants = 1








**DMSL-19C IN STOCK SOON** 

10

0

Model	Working	<b>Platform Height</b>		Platform	Footprint	Platform	Overall	Weight	Power -			
Number	Height	Max	Min	W x L	W x L	Extension	Height	(lbs)	Batteries			
Pushable												
MSL-10	16'	9'10"	26"	27" x 51"	31" x 57"	NA	77"	1200	2 - 12V			
MSL-12	19'	12'9"	26"	27" x 51"	31" x 57" NA		77"	1260	2 - 12V			
				Dri	vable							
DMSL-10	16'	10'	36"	28" x 50"	31" x 57"	22"	77"	1825	2 - 12V			
DMSL-12	19'	12'	36"	28" x 50"	31" x 57"	22"	77"	1900	2 - 12V			
DMSL-19C	25'	19'	42"	29" x 66"	29" x 75"	35"	86"	3329	4 x 6V			



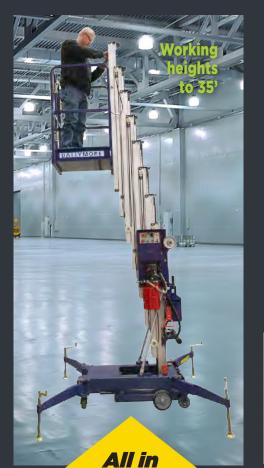

stock with

shipments in

2-3 days!

BALLYMORE

61

#### **MOBILE VERTICAL SINGLE PERSON LIFT**



#### **FEATURES**

- 300 LBS CAPACITY
- Manually propelled
   maintenance lift
- Working heights to 35'
- Compact design for easy storage

**BMVL-30** 

- 29x56 base allows lift to roll through standard doorways
- Easy to use outriggers extend from base to provide excellent stability
- 12 Volt DC Power (raise and lower)

	MOBILE VERTICAL LIFT • MANUALLY PROPELLED LIFT											
Model Number	Working	Platform	n Height	Platform	Footprint	Stowed	Weight Lbs					
	Height	Max	Min	W" x L"	W" x L"	Height						
BMVL-30	35'	30'	10"	24" x 27"	29" x 56"	78"	950					
		4.57										

#### ADDITIONAL INFORMATION

Outriggers mounted permanently to the unit, swing out, and are electrically interlocked for safe operations. Outrigger footprint - 64" x 74"

# DRIVABLE VERTICAL MAST LIFT DVML-18

#### FEATURES

- 330 LBS CAPACITY
- 24' Working Height
- Drivable At All Heights
- Non-marking Tires
- Compact Footprint only 30" x 62"
- Standard Platform 24" x 25"
- Cantilever Extension 21"
- Weight 2430 lbs.
- Orange Powder Coat
- 12 Volt DC Power

DRIVABLE VERTICAL MAST LIFT												
Model Number	Working	Platform	h Height	Platform	Footprint	Stowed	Weight					
	Height	Max	Min	W" x L"	W" x L"	Height	Lbs					
DVML-18	24'	18'	25"	24" x 25"	30" x 62"	78"	2430					

Cantilevered Platform Ext<u>ends 21"</u>



#### **MANUALLY PROPELLED ADJUSTABLE HEIGHT TANK TOP LIFTS**

#### FEATURES:

Adjustable work heights

- Provides easy access to tank trucks, railroad cars & other cantilevered applications/
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises &
- lowers cantilevered platform
- Open serrated grating steps and deck tread.
- Slip resistant climbing rungs
- 28"W x 60"L base, fixed outriggers spread to 69"
- Full rails on both sides, gates at each end of platform
- 2 swivel & 2 rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Fixed platform heights available

**TELESCOPING HYDRAULIC** 

 Gray coat finish (Standard) Powder

**MR SERIES** 

#### **OPTIONAL ACCESSORIES**

- AC electric power
- DC electric power Air-Hydraulic power
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle
- Removable 30" extension rail
- Safety Orange Powder Coat For outdoor applications primer undercoat



- Three power options: Plug in 120V AC w/thermal overload protection
- Independent 12V DC deep cycle system with battery,
- charger and double solenoid for added safety Air hydraulic power requiring 90 CFM
- with 90 PSI pressure

# Shown with optional Safety Orange finish & 30" extension railing LCHESTER 300 lb. Capacity

Model	Platform	n Height	Platform	Underclearance	Weight
Number	er Max Min L" x W"		Height	Lbs.	
TT-913	13' 8"	9' 4"	48" x 24"	Adjustable 9' - 13'	1525
TT-913F	13' 8"	9' 4"	48" x 24"	Non-Adjustable 9' - 13'	1450
TT-7-11	11' 8"	7' 4"	48" x 24"	Adjustable 7' to 11'	1450
TT-11-15	15' 8"	11' 4"	48" x 24"	Adjustable 11' to 15'	1625

#### **FEATURES:**

- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform
- Accommodates two workers Totally enclosed platform with 42" guard rails, midrails & gate; 4" toeboards and non-slip deck
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability

 Leveling jacks secure unit to floor and compensate for uneven surfaces



Rolls thru standard doorway

Model	Working	Platform	n Height	Weight							
Number	Height	Max	Min	Lbs							
MR-15-AC	21'	15'	6'4"	800							
MR-15-DC	21'	15'	6'4"	930							
MR-20-AC	25'	19'3"	6'4"	1,000							
MR-20-DC	25'	19'3"	6'4"	1,130							
MR-24-AC	30'	23'8"	6'7"	1,200							
MR-24-DC	30'	23'8"	6'7"	1,330							
MR-28-AC	34'	28'	6'10"	1,420							
MR-28-DC	34'	28'	6'10"	1,550							


• 500 LB. COMBINED **TWO PERSON CAPACITY** Working heights to 34'

**MAINTENANCE LIFTS** 

- Three power options:
- Convenient plug in 120V AC
- Independent 12V DC deep cycle system with battery and charger
- Air hydraulic power requiring 90 CFM with 90 PSI pressure
- Meets ANSI safety standards

#### **OPTIONAL ACCESSORIES**

Air-Hydraulic power Tool Tray Fluorescent tube holder Platform duplex receptacle

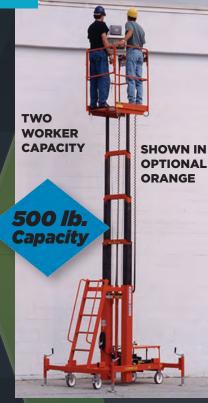



#### MANUALLY PROPELLED HYDRAULIC POWER STOCKER MERCHANDISE LIFTS PS SERIES



#### FEATURES:

- PS-12 and PS-15 models now include a larger 24"x32" cargo deck
- 12 volt DC power (AGM battery) with mounted charger included -Easily recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for worker safety
- 100+ raise and lower cycles between charges
- Key lock prevents unauthorized use
- Slide merchandise vs lifting
- Meets or exceeds ANSI safety standards

	Model Number	Weight Capacity	Working Height	Merchandise Deck Max Height	Footprint W" x L"	Overall Height (Lowered)	Power	Weight Lbs.
	PS-10	450	14'	9'	36" x 54"	76"	12V DC	1022
-	PS-12*	650	18'	13'	42" x 54"	94"	12V DC	1089
	PS-15*	650	21'	15'9"	43" x 60"	90"	12V DC	1189

\* Available with optional sensing system

650 lb.

Capacity

BALL

# DRIVABLE POWER STOCKER MERCHANDISE LIFT



Large Cargo Deck 32"(Wide)X 28"(Deep)

# Drivable in the raised position!

- Standing Platform 28"(Wide)X 19"(Deep)
- 650 lbs. Capacity- Merchandise and Operator
- 2-12V Batteries.
- Power Cord for charging
- Easy charging using standard 110V outlet
- Key Lock prevents unauthorized usage
- Ground and Control Box Operations
- Dual Speed
- Meets or exceeds ANSI safety standards

Model Working De Number Height Max H		Merchandise Deck Max Height	Footprint W" x L"	Overall Height (Lowered)	Power	Weight Lbs.
PS-12D*	18'	13'	42" x 60"	96"	2- 12V DC	1600

\* Available with optional sensing system

610.593.5062 • 800.762.8327 • WWW.BALLYMORE.COM

sensing system creates, a safety zone perimeter around the lift when in the raised position.

**Power Stocker's optional** 

POWDER COATED

TOUGH

No Outriggers Required. Floor Locks Secure Power Stocker Safely in Place!



Variable speed joystick for easy maneuverability



Power Stocker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



#### THE MINI **MERCHANDISE** LIFT (BMML-9)

#### • 500LB. CAPACITY

- Base = 26" Wide X 48" Long - (55" overall length including push rails)
- Merchandise Shelf = 25" Wide X 17" Long
- Overall Height = 55"
- Fully Lowered Standing Platform = 13"
- Standing Platform = 23<sup>1/2</sup> Wide X 20" deep
- Wheels 4- 6" diameter
- 2 2" Wide Locking Swivels
- 2 2" Wide Rigid Wheels
- Shelf Height Maximum = 110"
- Standing Platform Maximum Height = 71" Color Yellow
- Power 12V
- Weight = 650 lbs Approximate Shelf Capacity 150lbs
- (tested)

**FORK DECK** MAINTENANCE

PLATFORM

• 1,000 lb. CAPACITY

Turn your fork truck into

a personnel lift. Safe

and economical access to heights above those

reached by rolling ladders.

Extra Heavy Duty 1,000 Lb. Capacity!

10

#### Features

NEW

- Shelf Lip to prevent packages from falling off the front of the lift

- Safety Control Panel- 3 button plus Kill Switch Manual Lowering Valve Limit Switch included. This will prohibit the lift from ascending without the casters being locked to the floor. "Push" handles added to the front and back of the lift for easy maneuverability
- Safety shield to prevent access to internals Enlarged Standing Platform for added safety and comfort

- **Heavy Duty** Fork Deck SHIPS BOXED
- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards & locking gate
- 60" high screen shields operator from fork lift mast

POWDER COATED

**TOUGH** 

**PUSHABLE** 

BALLYNORE

- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- 4" swivel casters on base for easy positioning
- Safety orange powder coat
- Ships boxed, easy assembly
- ANSI B56.10 standards



MODEL	L″ X W″	WEIGHT
FD-O-C	36" x 36"	141
FD-48-C	48" x 36"	163
FD-40-48	40" x 48"	171
OPTIONAL	ACCESSOR	ES
Fluorescent E	26	
Tool Tray (Bolt	14	
All welded a	-	



# MODEL NUMBER: PLD PLUS

POWDER COATED TOUGH

NEW

BALLYMORE

asiste

CAPACITY 1,500 LBS.

PORTABLE LOADING DOCK

- Platform Height- Ground Level to 55" high
- Platform Dimensions 47" X 75"
- Weight 2,178 lbs.
- Color Safety Orange and Yellow
- Overall Base 68" wide by 105" long
- Overall Height (fully lowered) 44"
- Overall Height (fully raised) 98"

PLUN ONE CONTROL HANDLA

BALLYMORE

- Two 12V Batteries
- 24V Drive Motor



- Powered in forward, reverse, raise and lower directions
- All in one Control Handle for steering, movement forward and reverse, and platform raising and lowering
- Heavy Duty Capacity 1,500 lbs.
- Large Platform designed to address a wide variety of products
- Key Control Operation
- Fold Down Rails
- Safety Features including Emergency Stop Button
- Convenient 110 volt charging
- Extendable Side Rails
- Battery Power Indicator
- Built in Cycle Counter





# **BALLYPAL STACKERS**





#### BALLYPAL22AG63

BALLYPAL22AG138

MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT MAX	LIFT HEIGHT MIN	FORK LENGTH	FORK WIDTH	BASE LEGS (OD)	OVERALL LENGTH	OVERALL WIDTH	OVERALL HEIGHT	WEIGHT	POWER - BATTERIES
BALLYPAL22AG63	2200	63"	2 1/8"	42"	4"	46" TO 58"	66 1/2"	46" TO 58"	80"	830	12V/150Ah
BALLYPAL22AG138	2200	138"	2 1/8"	42"	4"	46" TO 58"	66 1/2"	46" TO 58"	89 1/2"	1120	12V/150Ah

# BALLYPAL ADJUSTABLE LEG STACKER

NEW



BALLYPAL22MSL63

BALLYPAL22LSL138

#### BALLYPAL35TSL157

MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT MAX	FORK LENGTH	FORK WIDTH	LOWERED MAST HEIGHT	FREE LIFT HEIGHT	EXTENDED MAST HEIGHT	HEIGHT OF TILLER IN DRIVE	HEIGHT LOWERED		OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL22MSL63	2200	63"	45"	4"	77"	60"	97"	49" MAX	1.6"	71"	29"	1350	2 X 12V
BALLYPAL22LSL138	2200	138"	45"	4"	88"	135"	158"	49" MAX	1.6"	71"	29"	1655	2 X 12V
BALLYPAL35TSL157	3500	157"	45"	4.7"	75"	52"	176"		2"	82"	46" TO 58"	3263	24V



# **BALLYPAL PALLET TRUCKS**



- Each product is built for high performance, maintenance friendly and an ergonomic design
- Core components are the highest quality
- Lift designs and chassis are built for Durability and maximum productivity Each lift is built with the highest
- safety standards in mind
- User friendly and smart designs are easy to operate and charge when needed
- In stock for quick deliveries

NEW



BALLYPAL33N



#### **BALLYPAL33X**



MODEL NUMBER	WEIGHT CAPACITY	LIFT HEIGHT	HEIGHT OF TILLER IN THE DRIVE POSITION	HEIGHT LOWERED	FORK LENGTH	FORK WIDTH	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER- BATTERIES
BALLYPAL33N	3300	4.5"	46" MAX	3"	45"	6.3"	60"	27"	278	24V
BALLYPAL33X	3300	4.5"	50" MAX	3"	48"	6.3"	68"	27"	364	48V
BALLYPAL40L	4000	4.7"	48" MAX	3"	48"	6.3"	68"	29"	913	24V



# **CUSTOM MAINTENANCE PLATFORMS**

ur to

LMUU

N AN

C

M

EDI

A DIVI





1

i

1

# 

**BALLYMORE ENGINEERS &** MANUFACTURES DESIGN **CUSTOM VERTICAL ACCESS** SOLUTIONS FOR CUSTOMERS WITH UNIQUE OR CUSTOM REQUIREMENTS.

#### **CUSTOM ENGINEERED WORK PLATFORMS**



SIF

178

1 

> 11

1

COR

M T 19-1









#### **POLICIES, WARRANTY, SHIPPING & RETURNS INFORMATION**

**Product Specifications are subject to change without notice.** Please confirm critical product specifications at the time of ordering.

Ship Prepaid and Add to take advantage of freight cost reductions with our carrier.

#### **Inspection Procedure**

Shipments are made FOB factory. Each product has been inspected prior to shipment. Consignee is responsible to inspect material at time of delivery, and should refuse shipment or make written notice to carrier upon receipt of damaged materials.

#### Carriers and Ballymore will not accept claims if damage is not noted at the time of delivery.

**Freight:** Ballymore can provide estimated freight cost based on our preferred carriers. Note: Costs are subject to change depending on fuel surcharges, special delivery requirements, etc. Ballymore will not be responsible for differences in freight estimates and actual freight costs.

## On collect or 3rd party billing shipments, any freight claims must be handled by the customer, including refused shipments.

#### WARRANTY

Company warrants these products to be free from defects in material and workmanship for a period of one year from date of original purchase. Component parts carry individual warranties as provided by the manufacturer. Our warranty does not extend to parts or end products subjected to misuse, neglect, damage in shipment, by accident or failure to comply with operating instructions. We will repair or replace any unit which is defective during the warranty period if that unit is returned to our factory properly packaged with transportation charges paid. Claims for unauthorized field labor or time charges will not be accepted. Company will not be responsible for any consequential damages of any nature.

**RETURN POLICY:** Written factory permission must be received prior to return. Returns must be in good condition and made within 30 days of original shipment. Freight prepaid. Restocking charge of 20 - 25% on standard items, 50% on aluminum and stainless.

#### **NON-REFUNDABLE ITEMS:**

Custom or modified ladders, work platforms, crossovers, modified or custom lifts are non-refundable.

Minimum Order: \$15.00, Prepay and add shipments are subject to \$5.00 service charge.





HEADQUARTERS

**501 Gunnard Carlson Drive** 



LIFT DIVISION 231 W. Stewart Huston Drive Coatesville, PA 19320



610.593.5062 • 800.762.8327 • WWW.BALLYMORE.COM

# **COMING SOON!**



**A**A

MORE SCISSO

LIFT SIZES

BALLYMORE

0.

**(**) **(**)