



**Tank Tops  
New Sizes  
Available!**



TANK TOP LIFT PLATFORM • PAGE 17

ROLLING SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS • CARTS



# BALLYMORE

## ELEVATION THROUGH INNOVATION

# MORE PRODUCTS = MORE SOLUTIONS



STEEL ROLLING LADDERS • PAGE 6



**NEW  
MANUFACTURING  
FACILITY AND  
VERTICAL ACCESS  
INNOVATION  
CENTER NOW  
OPEN!**

We specialize in Custom Ladders, Lifts & Platforms to meet your requirements. Short lead times, Uncompromising Quality & Exceptional Service!



PORTABLE LOADING DOCK • PAGE 29



LOCK-N-STOCK • PAGE 5



**NEW  
Pallet  
Products**

PALLET PRODUCTS • PAGES 26-28



CANTILEVERS • PAGE 17



# ELEVATION INNOVATION AND SERVICE

## SINCE 1945

when Ballymore began manufacturing rolling safety ladders we've been committed to quality construction, innovative product development and customer service.

## EVEN MORE CAPACITY

### NEW MANUFACTURING & INNOVATION CENTER

- EXPANDED PRODUCTION & DISTRIBUTION CAPACITY
- INCREASED CUSTOM ENGINEERING CAPABILITIES

## TODAY

we build upon our history of growth with the addition of another, state of the art manufacturing facility and innovation center in Coatesville, Pennsylvania.



The new 35,000 sq. ft. plant adds to existing manufacturing & distribution facilities equipping us with the capacity to continue to support our customer's growth needs while improving delivery performance, quality and service.

## EXPANDED CUSTOM SOLUTION CAPABILITY


Ballymore engineers & manufactures custom vertical access solutions for customers with unique or custom requirements. Don't see exactly what you need for your application? Call today to explore a custom solution to meet your needs: **800-762-8327**



Coatesville, PA  
Manufacturing & Custom  
Product Development Facility



Coatesville, PA  
Lift Division

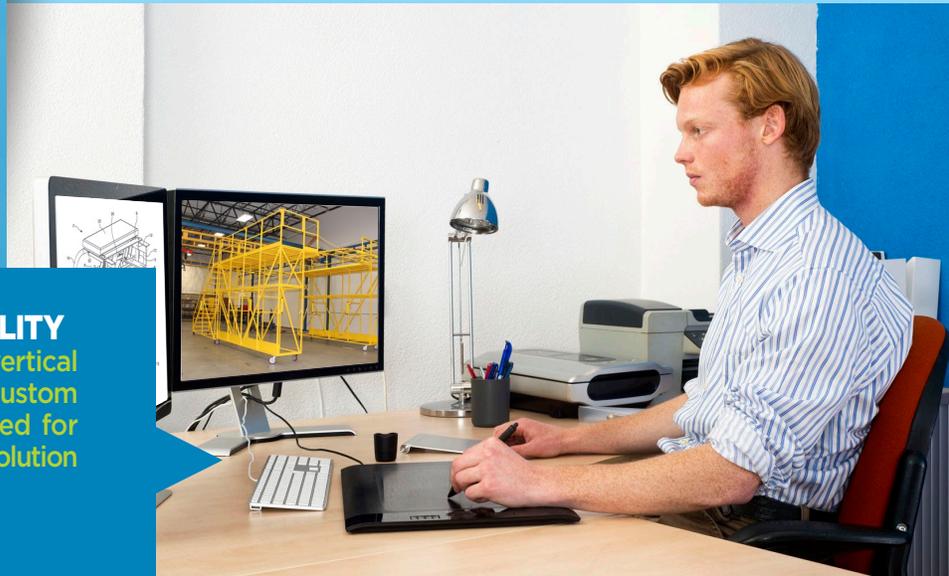

# WHY BALLYMORE?

## EVEN MORE PRODUCTS

### MORE **PATENTED** VERTICAL ACCESS INNOVATIONS

#### • **Weight Actuated Lockstep**

The safest, most durable Lockstep on the market today. Allows ladder to lock to the floor when 70 lbs. is applied to any of the steps. Prevents workers from hopping over the bottom step and rolling the ladder while they are on it, or have co-workers push them around. The preferred lock step of many Loss Prevention professionals.

#### • **Boxed Ladders & Platforms**

Patented ladder & work platform designs ship, stack & store in a box.

- Minimizes Risk of Freight Damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

#### • **Power Stocker Lift**

Patented manually propelled and driveable hydraulic order picker with optional sensing system that creates a safety zone around the lift alerting the operator of activity below the lift

#### • **Pallet Products**

Eight of the most popular pallet stackers and trucks on the market

### **REPLACEABLE COMPONENTS**

Extend ladder life with replaceable locksteps, handrails, base frames & rear verticals. Most parts ship by UPS so your ladders can be back in service quickly.

### **HEAVY DUTY CONSTRUCTION AND BETTER COMPONENTS**

#### • **Deeper Top Steps**

All ladders 5 steps and above feature a 14" Deep Top Step, compared to competitor's 10" deep top step.

#### • **High Quality Casters**

Ballymore ladders roll on the best casters in the industry, featuring poly tread, ball bearings, and dust covers

#### • **Dual Lockstep Pedals**

Our standard lockstep has two release pedals for increased convenience. Some competitor's offer a single pedal only.

#### • **Heavy Duty Construction**

The base frame and rear verticals of our Monster Line, Heavy Duty Slope Ladder series, Cantilever Ladders and Work Platforms are designed with heavy duty 2" x 1" rectangular tubing.

## MORE SAVINGS

### BALLYMORE'S PATENTED LADDER IN A BOX

- **LOWERS SHIPPING COSTS**
- **MINIMIZES THE RISK OF FREIGHT DAMAGE**
- **BOXES STACK EASILY**

*allowing cost effective stocking of ladders*

## TABLE OF CONTENTS


|   |       |
|---|-------|
| How to Select the Right Ladder.....       | 4     |
| Standard Rolling Ladder .....             | 5     |
| Lock-N-Stock Folding Ladder .....         | 5     |
| Heavy Duty M-2000 Rolling Ladder.....     | 6     |
| All Directional Ladder .....              | 7     |
| Navigator All Directional Ladder.....     | 7     |
| Stairway Slope Ladders.....               | 8     |
| Replacement Parts .....                   | 8     |
| Extra Heavy Duty Monster Line Ladder..... | 9     |
| Stock Picking Ladder.....                 | 9     |
| Weight Actuated Lockstep Ladder ....      | 10-11 |
| Tilt & Roll Ladder.....                   | 12    |
| Fold-N-Store Ladder .....                 | 12    |
| Mobile Work Platform .....                | 13    |
| Adjustable Height Work Platform.....      | 14    |
| Fork Deck Platforms .....                 | 14    |
| Truck/Dock Ladders .....                  | 14    |
| Aluminum Ladders.....                     | 15    |
| Aluminum Lock-N-Stock.....                | 15    |
| Wheel Barrow Ladders .....                | 15    |
| Stainless Steel Ladder.....               | 16    |
| Cantilever Series Ladder .....            | 17    |
| Tank Top Lift .....                       | 17    |
| PowerStocker Lifts .....                  | 19    |
| Mini Scissor Lift.....                    | 20    |
| Merchandise Lift .....                    | 20    |
| Drivable Scissor Lifts .....              | 21    |
| Vertical Mast Lifts .....                 | 22    |
| BallyLift .....                           | 23    |
| MR Maintenance Lift.....                  | 23    |
| Single Person Maintenance Lift.           | 24    |
| Heavy Duty Lift .....                     | 24    |
| Pallet Stackers .....                     | 26-27 |
| Pallet Trucks .....                       | 28    |
| Portable Loading Dock .....               | 29    |
| Industrial Crossover Platforms.....       | 30    |
| Carts .....                               | 30    |
| Custom Vertical Access Solutions .....    | 31    |
| Policies and Warranties .....             | 31    |

## PARTNERSHIP COMMITMENT

Ballymore works closely with our partners to collaboratively develop sales opportunities which include the design and engineering of custom vertical access solutions. We pride ourselves in being a supplier of both standard and custom ladders and lifts.

# SELECTING THE RIGHT ROLLING LADDER

What to consider when selecting the proper ladder for your application.

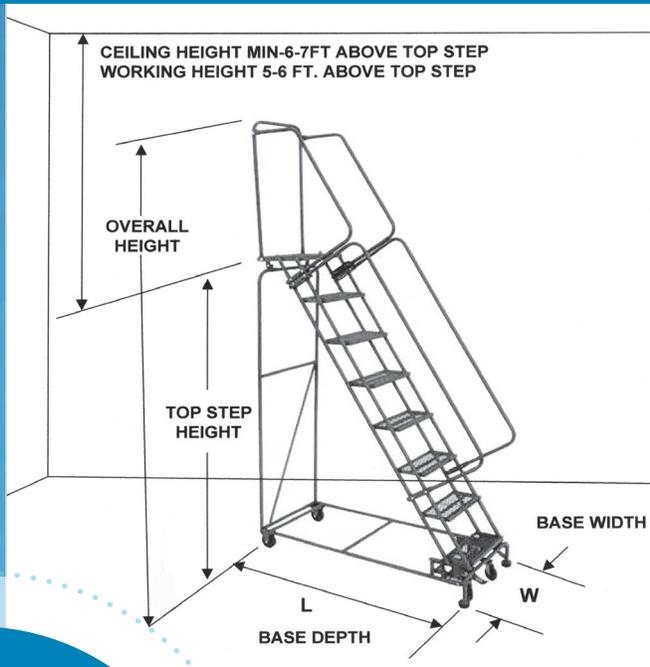

## Size Considerations

- Select Platform Height, also known as Top Step Height, based on operations to be performed.
- Platform Height is where the user generally stands. Make sure you have minimum clearance of 6 to 7 feet from the ceiling or any object suspended from the ceiling to insure the user has room to stand safely.
- Maintain maximum working height of 5 feet to 6 feet above the platform height.
- For larger ladders, choose a wide ladder over a narrow one if space permits. For bulky loads, consider a stairway slope ladder and/or deeper top step.

## MORE SAVINGS

BALLYMORE'S PATENTED LADDER IN A BOX

- LOWERS SHIPPING COSTS
- MINIMIZES THE RISK OF FREIGHT DAMAGE
- BOXES STACK EASILY  
*allowing cost effective stocking of ladders*



Patent No.:  
US 7,828,115 B2



**Weight Actuated Lockstep Ladder**



**Standard Lockstep Ladder**



**Spring Loaded Caster Ladder**

## Locking Mechanisms

- **Weight Actuated Lock Step:** This Patented state of the art lock step automatically actuates when 70 lbs. of weight is applied to the stair section. It is the safest and most durable lock step on the market today.
- **Standard Lock Step Ladder:** Ideal for applications 5 steps and above. These ladders are raised into the rolling position when the lock step is actuated. Releasing the lock step drops the ladder into the climbing position with the feet firmly on the floor.
- **Spring-loaded Casters:** Ideal for shorter ladders with 5 steps or less. On this style ladder, the wheels retract under the user's weight securing the ladder safely to the floor.

## Climbing Position

The rolling ladder is designed for the worker to face the steps when climbing or descending.

"Stairway Slope" ladders offer a more gradual 50 degree slope, which may be preferable when carrying heavy or bulky items up or down a ladder.

## Material Type

- **Steel:** For all around general purpose.
- **Stainless:** For corrosive environment as well as outdoor use.
- **Aluminum:** Like Stainless they are corrosion resistant but approximately 1/3 the weight of steel or stainless.

## TREAD SELECTION GUIDE



**Abrasive Mat Tread (R):**  
Provides non-slip footing for safe climbing. Perfect for clean retail or office environments.



**Perforated Tread (P):**  
Excellent slip resistance. Used extensively in retail and storeroom applications.



**Expanded Metal Tread (X):**  
This aggressive self-cleaning tread is ideal for the warehouse or retail floor & allows debris to fall through the tread



**Serrated Tread (G):**  
This most aggressive tread is ideal for the shop floor or any industrial application where maximum slip resistance is required.

# STANDARD ROLLING LADDERS WITH SPRING LOADED CASTERS

- 500 lb. capacity • Working heights up to 12'
- Spring loaded swivel casters retract under user's weight
- 7" deep steps with 10" deep top step on 1 - 4 step models shown with (\*) or (\*\*) in the chart below
- 14" deep top step on 4 - 7 step FSH models
- **Specify tread type when ordering**
- 1 - 4 step ladders (\*) & (\*\*) ship unassembled in a box, and are eligible for UPS shipping
- 4 - 7 step FSH models ship unassembled
- Specify set-up (SU) if required\*\*\*
- Available in all welded construction
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



FSH526X

| STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | 16" WIDE STEP |              |          | 24" WIDE STEP |              |          |
|--------------------------|---------------|----------|---------------|--------------|----------|---------------|--------------|----------|
|                          | TOP STEP      | OVER ALL | MODEL #       | BASE W" x L" | WGT Lbs. | MODEL #       | BASE W" x L" | WGT Lbs. |
| <b>NO HANDRAILS</b>      |               |          |               |              |          |               |              |          |
| 1 STEP                   | 12            | 12       | <b>118*</b>   | 18 x 16      | 18       | <b>126*</b>   | 26 x 16      | 20       |
| 2 STEP                   | 19            | 19       | <b>218*</b>   | 20 x 19      | 22       | <b>226*</b>   | 30 x 19      | 28       |
| 3 STEP                   | 28.5          | 28.5     | <b>318*</b>   | 20 x 25      | 31       | <b>326*</b>   | 30 x 25      | 36       |
| 4 STEP                   | 38            | 38       | <b>418*</b>   | 20 x 31      | 42       | <b>426*</b>   | 30 x 31      | 51       |
| <b>WITH HANDRAILS</b>    |               |          |               |              |          |               |              |          |
| 2 STEP                   | 19            | 49       | <b>*H218♦</b> | 20 x 19      | 36       | <b>*H226♦</b> | 30 x 19      | 42       |
| 3 STEP                   | 28.5          | 58.5     | <b>*H318♦</b> | 20 x 25      | 45       | <b>*H326♦</b> | 30 x 25      | 50       |
| 4 STEP                   | 38            | 68       | <b>*H418♦</b> | 20 x 31      | 56       | <b>*H426♦</b> | 30 x 31      | 65       |
| 4 STEP                   | 40            | 73       | <b>FSH418</b> | 20 x 35      | 68       | <b>FSH426</b> | 30 x 35      | 80       |
| 5 STEP                   | 50            | 83       | <b>FSH518</b> | 20 x 42      | 75       | <b>FSH526</b> | 30 x 42      | 87       |
| 6 STEP                   | 60            | 93       | <b>FSH618</b> | 24 x 49      | 83       | <b>FSH626</b> | 30 x 49      | 98       |
| 7 STEP                   | 70            | 103      | <b>FSH718</b> | 24 x 56      | 89       | <b>FSH726</b> | 30 x 56      | 108      |

\*Eligible for UPS ♦ Handrails may ship in separate box

## LOCK-N-STOCK AND NEW MODIFIED LOCK-N-STOCK

Both the Lock-N-Stock and new Modified Lock-N-Stock have a 58° slope and 7" Deep Steps. Our Standard Lock-N-Stock has 7" Deep Top Step where as our Modified Lock-N-Stock has a 10" Deep Top Step. Our Standard Lock-N-Stock has 22" high handles where as our Modified Lock-N-Stock has 30" handrails along with a rear guard rail.

| MODEL NUMBER   | STEPS INCLUDING TOP STEP | TOP STEP HEIGHT | WEIGHT LBS. | OPEN WIDTH & LENGTH | FOLDED SIZE  | SHIPS UPS (Oversize) |
|----------------|--------------------------|-----------------|-------------|---------------------|--------------|----------------------|
| <b>LS2247</b>  | 2 STEP                   | 19"             | 31 lbs.     | 24 x 17             | 10 x 24 x 41 | YES                  |
| <b>LS3247</b>  | 3 STEP                   | 28.5"           | 37 lbs.     | 24 x 23             | 10 x 24 x 52 | YES                  |
| <b>LS4247</b>  | 4 STEP                   | 38"             | 44 lbs.     | 24 x 30             | 10 x 24 x 65 | YES*                 |
| <b>LS32410</b> | 3 STEP                   | 28.5"           | 46 lbs.     | 24 x 28             | 14 x 24 x 62 | YES*                 |
| <b>LS42410</b> | 4 STEP                   | 38"             | 52 lbs.     | 24 x 35             | 14 x 24 x 72 | YES*                 |

**Now Available in Aluminum See Page 15** *Climb it, Roll it, Fold it & Store it!*

### • Heavy duty rated for 350 lbs.

- Welded construction
- 16" wide perforated steps
- Standard Lock-n-Stock folds to approx. 10" deep, modified Lock-n-Stock folds to approx. 14" deep for easy storage
- Locks in the folded or climbing position
- Easy to maneuver in the open or closed positions
- Blue powder coat finish
- Built to ANSI standards



LS3247  
LOCK-N-STOCK



LS42410  
MODIFIED LOCK-N-STOCK



**COMING SOON**  
**THE 450 LB CAPACITY**  
**LOCK N STOCK**





# M-2000 SERIES ROLLING SAFETY LADDERS

- 450 LB. CAPACITY
- Easy to use foot-pedal activated lockstep
- High quality casters with bearing and dust cover
- 14" deep top step
- Ships unassembled for freight savings
- Available fully assembled, specify (SU) set-up
- Specify tread type when ordering
- Rigid 1" OD tubing
- 30" high handrails
- 21" & 28" deep top step available (see below)
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



14" DEEP TOP STEP

POWDER COATED TOUGH™

**Ballymore's Component Design with Replaceable Parts!**

**EXTEND LADDER LIFE AND UTILITY. LOCKSTEPS, HANDRAILS, BASE FRAMES AND REAR VERTICALS CAN BE REPLACED.**

| # OF STEPS INCLUDING TOP STEP                 | HEIGHT INCHES |          | MODEL #       | BASE W" x L" | WGT Lbs. |
|---|---------------|----------|---------------|--------------|----------|
|   | TOP STEP      | OVER ALL |               |              |          |
| <b>16" WIDE STEP WITH 24" WIDE BASE</b>       |               |          |               |              |          |
| 5 STEP  | 50"           | 83"      | <b>052414</b> | 24 x 43      | 91       |
| 6 STEP  | 60"           | 93"      | <b>062414</b> | 24 x 49      | 100      |
| 7 STEP  | 70"           | 103"     | <b>072414</b> | 24 x 55      | 109      |
| 8 STEP  | 80"           | 113"     | <b>082414</b> | 24 x 61      | 127      |
| <b>24" WIDE STEP WITH 32" - 40" WIDE BASE</b> |               |          |               |              |          |
| 5 STEP  | 50"           | 83"      | <b>053214</b> | 32 x 43      | 110      |
| 6 STEP  | 60"           | 93"      | <b>063214</b> | 32 x 49      | 122      |
| 7 STEP  | 70"           | 103"     | <b>073214</b> | 32 x 55      | 143      |
| 8 STEP  | 80"           | 113"     | <b>083214</b> | 32 x 61      | 160      |
| 9 STEP  | 90"           | 123"     | <b>093214</b> | 32 x 68      | 175      |
| 10 STEP                                       | 100"          | 133"     | <b>103214</b> | 32 x 74      | 193      |
| 11 STEP                                       | 110"          | 143"     | <b>113214</b> | 32 x 80      | 205      |
| 12 STEP                                       | 120"          | 153"     | <b>123214</b> | 32 x 87      | 220      |
| 13 STEP*                                      | 130"          | 175"     | <b>134014</b> | 40 x 94      | 250      |
| 14 STEP*                                      | 140"          | 185"     | <b>144014</b> | 40 x 100     | 280      |
| 15 STEP*                                      | 150"          | 195"     | <b>154014</b> | 40 x 106     | 310      |

\*Must be skidded. See price sheet for skidding cost.

*Specify Tread Type when ordering*




Abrasive Mat Tread (R)



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

# M-2000 SERIES DEEP TOP STEP LADDERS

- 450 LB. CAPACITY
- All features of the standard M-2000 line with a 21" or 28" Deep Top Step to provide a larger and more comfortable work space
- Available with rear guardrail removed for walk through
- Side exit available on 28" deep top step models



21" OR 28" DEEP TOP STEP

POWDER COATED TOUGH™

*Features choice of 21" or 28" deep top step*

| # OF STEPS INCLUDING TOP STEP         | HEIGHT INCHES |          | 21" DEEP TOP STEP |              |          | 28" DEEP TOP STEP |              |          |
|---------------------------------------|---------------|----------|-------------------|--------------|----------|-------------------|--------------|----------|
|                                       | TOP STEP      | OVER ALL | MODEL #           | BASE W" x L" | WGT Lbs. | MODEL #           | BASE W" x L" | WGT Lbs. |
| <b>16" WIDE STEP 24" WIDE BASE</b>    |               |          |                   |              |          |                   |              |          |
| 5 STEP                                | 50            | 83       | <b>052421</b>     | 24 x 50      | 102      | <b>052428</b>     | 24 x 57      | 113      |
| 6 STEP                                | 60            | 93       | <b>062421</b>     | 24 x 56      | 111      | <b>062428</b>     | 24 x 63      | 122      |
| 7 STEP                                | 70            | 103      | <b>072421</b>     | 24 x 62      | 120      | <b>072428</b>     | 24 x 69      | 131      |
| 8 STEP                                | 80            | 113      | <b>082421</b>     | 24 x 68      | 138      | <b>082428</b>     | 24 x 75      | 149      |
| <b>24" WIDE STEP 32" - 40" W BASE</b> |               |          |                   |              |          |                   |              |          |
| 5 STEP                                | 50            | 83       | <b>053221</b>     | 32 x 50      | 121      | <b>053228</b>     | 32 x 57      | 132      |
| 6 STEP                                | 60            | 93       | <b>063221</b>     | 32 x 56      | 133      | <b>063228</b>     | 32 x 63      | 144      |
| 7 STEP                                | 70            | 103      | <b>073221</b>     | 32 x 62      | 154      | <b>073228</b>     | 32 x 69      | 165      |
| 8 STEP                                | 80            | 113      | <b>083221</b>     | 32 x 68      | 171      | <b>083228</b>     | 32 x 75      | 182      |
| 9 STEP                                | 90            | 123      | <b>093221</b>     | 32 x 75      | 186      | <b>093228</b>     | 32 x 82      | 197      |
| 10 STEP                               | 100           | 133      | <b>103221</b>     | 32 x 81      | 204      | <b>103228</b>     | 32 x 88      | 215      |
| 11 STEP                               | 110           | 143      | <b>113221</b>     | 32 x 87      | 216      | <b>113228</b>     | 32 x 94      | 227      |
| 12 STEP                               | 120           | 153      | <b>123221</b>     | 32 x 94      | 231      | <b>123228</b>     | 32 x 101     | 242      |
| 13 STEP*                              | 130           | 175      | <b>134021</b>     | 40 x 101     | 261      | <b>134028</b>     | 40 x 108     | 272      |
| 14 STEP*                              | 140           | 185      | <b>144021</b>     | 40 x 107     | 291      | <b>144028</b>     | 40 x 115     | 302      |
| 15 STEP*                              | 150           | 195      | <b>154021</b>     | 40 x 113     | 321      | <b>154028</b>     | 40 x 120     | 332      |

## MOVES Laterally TO FIT IN TIGHT CORNERS AND CLOSE TO SHELVES

| # OF STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | MODEL #         | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|-----------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |                 |              |          |
| <b>16" WIDE STEP</b>          |               |          |                 |              |          |
| 6 STEP                        | 60            | 93       | <b>PIP-6</b>    | 24 x 49      | 110      |
| 7 STEP                        | 70            | 103      | <b>PIP-7</b>    | 24 x 55      | 125      |
| 8 STEP                        | 80            | 113      | <b>PIP-8</b>    | 24 x 61      | 140      |
| <b>24" WIDE STEP</b>          |               |          |                 |              |          |
| 6 STEP                        | 60            | 93       | <b>PIP-6-32</b> | 32 x 49      | 133      |
| 7 STEP                        | 70            | 103      | <b>PIP-7-32</b> | 32 x 55      | 154      |
| 8 STEP                        | 80            | 113      | <b>PIP-8-32</b> | 32 x 61      | 171      |
| 9 STEP                        | 90            | 123      | <b>PIP-9</b>    | 32 x 68      | 186      |
| 10 STEP                       | 100           | 133      | <b>PIP-10</b>   | 32 x 74      | 204      |
| 11 STEP                       | 110           | 143      | <b>PIP-11</b>   | 32 x 80      | 216      |
| 12 STEP                       | 120           | 153      | <b>PIP-12</b>   | 32 x 87      | 231      |



POWDER COATED **TOUGH™**

14" DEEP TOP STEP

## ALL DIRECTION ROLLING LADDERS

- 450 LB. CAPACITY
- Turns in its own radius
- 14" deep top step
- Easy to use foot-pedal activated lockstep
- Gray powder coat finish
- Built to meet or exceed OSHA and ANSI standards
- CAL OSHA available
- SHIPS KD to reduce freight costs
- Available assembled, specify (SU) set-up
- Specify tread type when ordering
- (X) Expanded Metal Standard
- (P) Perforated
- (R) Abrasive Mat
- (G) Heavy Duty Serrated Grating

### All-Directional System



Rolls on 4 swivel casters allowing ladders to move in **ALL DIRECTIONS** - even laterally! Rigid rear casters easily transition between floor types.

### SHIPS KD IN A BOX:

- Minimizes risk of freight damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

**Ballymore's Patented Bolt-in Top Step Ladders Ship Boxed!**

Designed for **Easy & Fast Assembly**

FOR CUSTOM ENGINEERED ELEVATION

SOLUTIONS CALL: (800) 762-8327

## Unique Patented Design & Engineering

Easily maneuverable and designed to provide easy access to narrow aisles and tight spaces. A safer option to "A" frame ladders, the Navigator includes handrails and a more gradual climbing slope. The patented weight actuated lockstep gives the ladder a very secure feel when climbing. Designed to provide increased Safety, reducing accidents and worker's compensation claims.

| # OF STEPS INCLUDING TOP STEP                       | Height Inches |          | MODEL #         | BASE W" x L" | WGT Lbs. |
|---|---------------|----------|-----------------|--------------|----------|
|   | TOP STEP      | OVER ALL |                 |              |          |
| <b>THE NAVIGATOR WITH STANDARD FIXED SIDE RAILS</b> |               |          |                 |              |          |
| 7 STEP  | 70            | 103      | <b>NAV-7RS</b>  | 26 x 51      | 160      |
| 8 STEP  | 80            | 113      | <b>NAV-8RS</b>  | 26 x 57      | 176      |
| 9 STEP  | 90            | 123      | <b>NAV-9RS</b>  | 26 x 63      | 192      |
| 10 STEP   | 100           | 133      | <b>NAV-10RS</b> | 26 x 69      | 210      |
| <b>THE NAVIGATOR WITH FOLDING SIDE RAILS</b>        |               |          |                 |              |          |
| 9 STEP  | 90            | 123      | <b>NAV-9RF</b>  | 26 x 63      | 192      |
| 10 STEP   | 100           | 133      | <b>NAV-10RF</b> | 26 x 69      | 210      |

POWDER COATED **TOUGH™**

Shown with **Folding Rails**



Navigates **Narrow Aisles Easily**

## THE NAVIGATOR ALL DIRECTION ROLLING LADDER

- 450 LB. CAPACITY
- 14" deep top step
- Available 7-10 Steps
- All Directional maneuverability
- Patented weight actuated lockstep
- Standard fixed rails or folding side rails
- Specify tread type when ordering
- Ships KD in a box
- Available fully assembled, specify (SU) set-up
- Gray powder coat finish
- Meets OSHA and ANSI;
- CAL OSHA available



# 50° SLOPE WALK DOWN LADDER

- 450 LB. CAPACITY
- 50° stairway slope allows easier climbing and descent
- Foot pedal activated lockstep
- 14" deep top step standard
- 21" and 28" deep top steps available
- Specify tread type when ordering
- Ships KD for freight savings
- Available fully assembled, specify (SU) set-up
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Meets OSHA & ANSI standards
- CAL OSHA available

# HEAVY DUTY STAIRWAY SLOPE LADDER

- HEAVY DUTY - RUGGED 600 LBS. CAPACITY
- 50° stairway slope allows easier climbing and descent
- 14" deep Top Step for added comfort & safety
- 10" deep intermediate steps
- 21" and 28" deep top steps are available
- Easy operating lockstep secures ladder to the floor
- Gray powder coat finish
- All direction option available
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Meets OSHA & ANSI standards
- CAL OSHA available

# LADDER REPLACEMENT PARTS & OPTIONS



14" DEEP TOP STEP



More Gradual Slope

Available with ALL DIRECTIONAL OPTION

Recommended on all 10, 11 & 12 step models

| # OF STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | MODEL #       | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|---------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |               |              |          |
| <b>16" WIDE STEP</b>          |               |          |               |              |          |
| 5 STEP                        | 50"           | 83"      | <b>SW524</b>  | 24 x 51      | 96       |
| 6 STEP                        | 60"           | 93"      | <b>SW624</b>  | 24 x 59      | 109      |
| 7 STEP                        | 70"           | 103"     | <b>SW724</b>  | 24 x 68      | 122      |
| 8 STEP                        | 80"           | 113"     | <b>SW824</b>  | 24 x 76      | 135      |
| <b>24" WIDE STEP</b>          |               |          |               |              |          |
| 5 STEP                        | 50"           | 83"      | <b>SW532</b>  | 32 x 51      | 115      |
| 6 STEP                        | 60"           | 93"      | <b>SW632</b>  | 32 x 59      | 120      |
| 7 STEP                        | 70"           | 103"     | <b>SW732</b>  | 32 x 68      | 139      |
| 8 STEP                        | 80"           | 113"     | <b>SW832</b>  | 32 x 76      | 165      |
| 9 STEP                        | 90"           | 123"     | <b>SW932</b>  | 32 x 84      | 180      |
| 10 STEP                       | 100"          | 133"     | <b>SW1032</b> | 32 x 92      | 200      |
| 11 STEP                       | 110"          | 143"     | <b>SW1132</b> | 32 x 101     | 210      |
| 12 STEP                       | 120"          | 153"     | <b>SW1232</b> | 32 x 109     | 230      |

AVAILABLE TREAD TYPE OPTIONS:

- (P) Perforated (Standard) (R) Abrasive Mat  
(G) Heavy Duty Serrated Grating (X) Expanded Metal



Base Frame & Rear Vertical Rugged 2" X 1" Tubing

21" or 28" DEEP TOP STEP



| # OF STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | MODEL #       | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|---------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |               |              |          |
| 5 STEP                        | 50"           | 83"      | <b>HDS-5</b>  | 32 x 50      | 132      |
| 6 STEP                        | 60"           | 93"      | <b>HDS-6</b>  | 32 x 58      | 152      |
| 7 STEP                        | 70"           | 103"     | <b>HDS-7</b>  | 32 x 66      | 178      |
| 8 STEP                        | 80"           | 113"     | <b>HDS-8</b>  | 32 x 74      | 204      |
| 9 STEP                        | 90"           | 123"     | <b>HDS-9</b>  | 32 x 82      | 227      |
| 10 STEP                       | 100"          | 133"     | <b>HDS-10</b> | 32 x 90      | 245      |
| 11 STEP                       | 110"          | 143"     | <b>HDS-11</b> | 32 x 98      | 278      |
| 12 STEP                       | 120"          | 153"     | <b>HDS-12</b> | 32 x 106     | 297      |



AVAILABLE TREAD TYPES:

- (P) Perforated (Standard)  
(G) Heavy Duty Serrated Grating  
(R) Abrasive Mat  
(X) Expanded Metal

PLEASE SPECIFY WHEN ORDERING

**Optional Replaceable SKID PLATE FOR ROUGH SURFACES**

**Ladder Shelves & Trays**

- Hanging Shelf
- Hanging Tray

| PART # | DESCRIPTION                 | # PER SET |
|--------|-----------------------------|-----------|
| *PR-2  | 2" Replacement Casters Sets | 4         |
| *PR-3  | 3" Replacement Casters Sets | 4         |
| PS     | Replacement Springs         | 4         |
| PTHDS  | Replacement Rubber Tips     | 4         |
| SBR-4  | 4" Replacement Casters Sets | 4         |
| FW-2   | 10" Rubber Wheels           | 2         |
| DONUTS | 2.5" Donut Style Pads       | 2         |

**Rear Exit or Side Exit Available**

- 28" deep top step required for Side Exit
- Confirm freight classification & packing charge
- Not available on ladders with spring loaded casters
- See price list for cost

\*Must specify # of steps and width (Set includes casters, springs, rubber tips and hardware)

## Monster Line Rolling Safety Ladder • Most Heavy-Duty Rolling Ladder in the Industry

| # OF STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | MODEL #  | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|----------|--------------|----------|
|                               | TOP STEP      | OVER ALL |          |              |          |
| 6 STEP                        | 60"           | 93"      | ML063221 | 32" x 56"    | 165      |
| 7 STEP                        | 70"           | 103"     | ML073221 | 32" x 62"    | 189      |
| 8 STEP                        | 80"           | 113"     | ML083221 | 32" x 68"    | 209      |
| 9 STEP                        | 90"           | 123"     | ML093221 | 32" x 75"    | 227      |
| 10 STEP                       | 100"          | 133"     | ML103221 | 32" x 81"    | 248      |
| 11 STEP                       | 110"          | 143"     | ML113221 | 32" x 87"    | 263      |
| 12 STEP                       | 120"          | 153"     | ML123221 | 32" x 94"    | 281      |
| 13 STEP                       | 130"          | 175"     | ML134021 | 40" x 101"   | 314      |
| 14 STEP                       | 140"          | 185"     | ML144021 | 40" x 107"   | 347      |
| 15 STEP                       | 150"          | 195"     | ML154021 | 40" x 113"   | 380      |



Base Frame & Rear Vertical Rugged 2" X 1" Tubing

21" DEEP TOP STEP



Base Frame & Rear Vertical Rugged 2" x 1" Rectangular Tubing • 21" Deep Top Step Standard • Patented Weight Actuated Lockstep Specify alternate tread when ordering.



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)

FOR PRICING CALL : (800) 762-8327 OR VISIT WWW.BALLYMORE.COM

**EXTEND LADDER LIFE AND UTILITY.** Locksteps, handrails, base frames & rear verticals can be replaced. Many parts ship by UPS so your ladders can be back in service quickly.

*Ballymore's Component Design with Replaceable Parts!*

| # OF STEPS INCLUDING TOP STEP           | Height Inches |          | MODEL #   | BASE W" x L" | WGT Lbs. |
|---|---------------|----------|-----------|--------------|----------|
|   | TOP STEP      | OVER ALL |           |              |          |
| <b>16" WIDE TREAD 14" Deep Top Step</b> |               |          |           |              |          |
| 6 STEP                                  | 60            | 93       | SPL-6-14N | 24 x 49      | 80       |
| 7 STEP                                  | 70            | 103      | SPL-7-14N | 24 x 55      | 89       |
| 8 STEP                                  | 80            | 113      | SPL-8-14N | 24 x 61      | 120      |
| <b>16" WIDE TREAD 21" Deep Top Step</b> |               |          |           |              |          |
| 6 STEP                                  | 60            | 93       | SPL-6-N   | 24 x 56      | 91       |
| 7 STEP                                  | 70            | 103      | SPL-7-N   | 24 x 62      | 100      |
| 8 STEP                                  | 80            | 113      | SPL-8-N   | 24 x 68      | 131      |
| <b>24" WIDE TREAD 14" Deep Top Step</b> |               |          |           |              |          |
| 6 STEP                                  | 60            | 93       | SPL-6-14  | 32 x 49      | 150      |
| 7 STEP                                  | 70            | 103      | SPL-7-14  | 32 x 55      | 166      |
| 8 STEP                                  | 80            | 113      | SPL-8-14  | 32 x 61      | 205      |
| 9 STEP                                  | 90            | 123      | SPL-9-14  | 32 x 68      | 215      |
| 10 STEP                                 | 100           | 133      | SPL-10-14 | 32 x 74      | 225      |
| 11 STEP                                 | 110           | 143      | SPL-11-14 | 32 x 80      | 235      |
| 12 STEP                                 | 120           | 153      | SPL-12-14 | 32 x 87      | 250      |
| <b>24" WIDE TREAD 21" Deep Top Step</b> |               |          |           |              |          |
| 6 STEP                                  | 60            | 93       | SPL-6     | 32 x 56      | 160      |
| 7 STEP                                  | 70            | 103      | SPL-7     | 32 x 62      | 176      |
| 8 STEP                                  | 80            | 113      | SPL-8     | 32 x 68      | 215      |
| 9 STEP                                  | 90            | 123      | SPL-9     | 32 x 75      | 225      |
| 10 STEP                                 | 100           | 133      | SPL-10    | 32 x 81      | 235      |
| 11 STEP                                 | 110           | 143      | SPL-11    | 32 x 87      | 245      |
| 12 STEP                                 | 120           | 153      | SPL-12    | 32 x 94      | 260      |



Combines the benefits of a rolling safety ladder and a stock-picking cart!



PLEASE SPECIFY TREAD TYPE WHEN ORDERING LADDERS

## MONSTER LINE LADDERS

**Extra Heavy Duty 600 Lb. Capacity!**

- Patented Weight Actuated Lockstep
- Rugged 2" x 1" Rectangular tubing base frame and rear vertical
- 21" deep top step
- 59 degree slope
- 24" wide steps standard
- High quality non marking wheels w/roller bearings and dust cover
- Rear corner bumpers - standard
- All-Directional option available
- Gray powder coat finish
- Available w/o rear guard - rail for easy walk through
- Exceeds OSHA & ANSI standards
- CAL OSHA available
- Certified in Canada

## STOCK PICKING ROLLING LADDERS

- **COMBINED 600 LBS. CAPACITY**
- 450 lbs. Max for ladder
- 300 lbs. Max for shelves
- Combines the benefits of a rolling safety ladder and a stock-picking cart
- 16" or 24" wide steps
- 14" or 21" deep top step
- Sturdy Stock Shelves:
  - 2 shelves on 6 - 7 step models
  - 3 shelves on 8 - 12 step models
- Specify Tread Type when Ordering Ladders
- Gray powder coat finish
- CAL OSHA available
- Ships unassembled & boxed to reduce freight costs
- Built to OSHA & ANSI standards



# PATENTED WEIGHT ACTUATED LOCKSTEP LADDERS

## Features:

- **450 LB. CAPACITY**
- This state of the art lockstep has one pedal which lifts the ladder into the rolling position
- As you climb the ladder your weight activates the lockstep - securing the ladder to the floor in the climbing position
- Available in 59° Ladder Slope or 50° Stairway Slope
- 14" deep top step standard 21" and 28" available
- Durable: manufactured with 1" OD tubing
- Built to OSHA and ANSI standards
- Gray powder coat finish
- CAL OSHA available



14" DEEP TOP STEP



59° Slope Ladder



## Think Safety... Buy Weight Actuated. The Patented Lockstep from Ballymore

| # OF STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | MODEL #  | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|----------|--------------|----------|
|                               | TOP STEP      | OVER ALL |          |              |          |
| <b>16" WIDE STEP</b>          |               |          |          |              |          |
| 5 STEP                        | 50"           | 83"      | WA052414 | 24 x 43      | 91       |
| 6 STEP                        | 60"           | 93"      | WA062414 | 24 x 49      | 100      |
| 7 STEP                        | 70"           | 103"     | WA072414 | 24 x 55      | 109      |
| 8 STEP                        | 80"           | 113"     | WA082414 | 24 x 61      | 127      |
| <b>24" WIDE STEP</b>          |               |          |          |              |          |
| 5 STEP                        | 50"           | 83"      | WA053214 | 32 x 43      | 110      |
| 6 STEP                        | 60"           | 93"      | WA063214 | 32 x 49      | 122      |
| 7 STEP                        | 70"           | 103"     | WA073214 | 32 x 55      | 143      |
| 8 STEP                        | 80"           | 113"     | WA083214 | 32 x 61      | 160      |
| 9 STEP                        | 90"           | 123"     | WA093214 | 32 x 68      | 175      |
| 10 STEP                       | 100"          | 133"     | WA103214 | 32 x 74      | 193      |
| 11 STEP                       | 110"          | 143"     | WA113214 | 32 x 80      | 205      |
| 12 STEP                       | 120"          | 153"     | WA123214 | 32 x 87      | 220      |
| 13 STEP                       | 130"          | 175"     | WA134014 | 40 x 94      | 250      |
| 14 STEP                       | 140"          | 185"     | WA144014 | 40 x 100     | 280      |
| 15 STEP                       | 150"          | 195"     | WA154014 | 40 x 106     | 310      |

## SPECIFY TREAD TYPE WHEN ORDERING:



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)



Abrasive Mat Tread (R)

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

## PATENTED WEIGHT ACTUATED LOCKSTEP



## THE MOST DURABLE LOCK STEP ON THE MARKET TODAY!

Designed using finite element analysis, then robotically tested. Prototypes achieved over 60,000 cycles before replacing latch hook. **Then 60,000 more cycles!**



Apply 70 pounds of pressure to the steps & the ladder automatically drops the front feet to the ground securing the ladder to the floor for safe climbing.

Single pedal easily lifts ladder into the rolling position.

Patent No.: US 7,841,447 B2

## BUY WEIGHT ACTUATED FOR INCREASED SAFETY AND STABILITY

### ANOTHER EXCLUSIVE BALLYMORE INNOVATION:

Ballymore engineered its patented weight actuated lock step to provide an easy, safe and reliable mechanism to secure rolling ladders to the floor to ensure safe climbing and descent. Ladders equipped with our weight actuated lockstep lock to the ground

when worker steps on any step of the ladder and applies just 70 lbs of pressure. The weight actuated lockstep is designed to prevent accidents caused by a ladder being rolled or moved while another worker is on the top platform.

**WHEN SAFETY COUNTS, COUNT ON BALLYMORE.**

## Weight Actuated Lockstep combined with All Directional Maneuverability

| # OF STEPS INCLUDING TOP STEP | Height Inches |          | MODEL #      | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|--------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |              |              |          |
| <b>16" WIDE STEP</b>          |               |          |              |              |          |
| 5 STEP                        | 50"           | 83"      | WA-AD-052414 | 24 x 43      | 91       |
| 6 STEP                        | 60"           | 93"      | WA-AD-062414 | 24 x 49      | 100      |
| 7 STEP                        | 70"           | 103"     | WA-AD-072414 | 24 x 55      | 109      |
| 8 STEP                        | 80"           | 113"     | WA-AD-082414 | 24 x 61      | 127      |
| <b>24" WIDE STEP</b>          |               |          |              |              |          |
| 5 STEP                        | 50"           | 83"      | WA-AD-053214 | 32 x 43      | 110      |
| 6 STEP                        | 60"           | 93"      | WA-AD-063214 | 32 x 49      | 122      |
| 7 STEP                        | 70"           | 103"     | WA-AD-073214 | 32 x 55      | 143      |
| 8 STEP                        | 80"           | 113"     | WA-AD-083214 | 32 x 61      | 160      |
| 9 STEP                        | 90"           | 123"     | WA-AD-093214 | 32 x 68      | 175      |
| 10 STEP                       | 100"          | 133"     | WA-AD-103214 | 32 x 74      | 193      |
| 11 STEP                       | 110"          | 143"     | WA-AD-113214 | 32 x 80      | 205      |
| 12 STEP                       | 120"          | 153"     | WA-AD-123214 | 32 x 87      | 220      |
| 13 STEP                       | 130"          | 175"     | WA-AD-134014 | 40 x 94      | 250      |
| 14 STEP                       | 140"          | 185"     | WA-AD-144014 | 40 x 100     | 280      |
| 15 STEP                       | 150"          | 195"     | WA-AD-154014 | 40 x 106     | 310      |



POWDER COATED TOUGH™

14" DEEP TOP STEP



59° Slope Ladder

Patent No.: US 7,841,447 B2

### SPECIFY TREAD TYPE WHEN ORDERING:

- (R) Abrasive Mat
- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating

#### All-Directional Caster System



#### Weight Actuated Lockstep



FOR CUSTOM ENGINEERED SOLUTIONS • CALL: (800) 762-8327

| # OF STEPS INCLUDING TOP STEP | Height Inches |          | All Directional MODEL # | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|-------------------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |                         |              |          |
| <b>16" WIDE STEP</b>          |               |          |                         |              |          |
| 5 STEP                        | 50"           | 83"      | WA-AD-SW-052414         | 24 x 50      | 96       |
| 6 STEP                        | 60"           | 93"      | WA-AD-SW-062414         | 24 x 58      | 109      |
| 7 STEP                        | 70"           | 103"     | WA-AD-SW-072414         | 24 x 66      | 122      |
| 8 STEP                        | 80"           | 113"     | WA-AD-SW-082414         | 24 x 74      | 135      |
| <b>24" WIDE STEP</b>          |               |          |                         |              |          |
| 5 STEP                        | 50"           | 83"      | WA-AD-SW-053214         | 32 x 50      | 115      |
| 6 STEP                        | 60"           | 93"      | WA-AD-SW-063214         | 32 x 58      | 120      |
| 7 STEP                        | 70"           | 103"     | WA-AD-SW-073214         | 32 x 66      | 139      |
| 8 STEP                        | 80"           | 113"     | WA-AD-SW-083214         | 32 x 74      | 165      |
| 9 STEP                        | 90"           | 123"     | WA-AD-SW-093214         | 32 x 82      | 180      |
| 10 STEP                       | 100"          | 133"     | WA-AD-SW-103214         | 32 x 90      | 200      |
| 11 STEP                       | 110"          | 143"     | WA-AD-SW-113214         | 32 x 98      | 210      |
| 12 STEP                       | 120"          | 153"     | WA-AD-SW-123214         | 32 x 106     | 230      |


### SPECIFY TREAD TYPE WHEN ORDERING:

- (P) Perforated
- (R) Abrasive Mat
- (G) Heavy Duty Serrated Grating
- (X) Expanded Metal

POWDER COATED TOUGH™

14" DEEP TOP STEP

**50° Stairway Slope allows easier climbing and descent.**

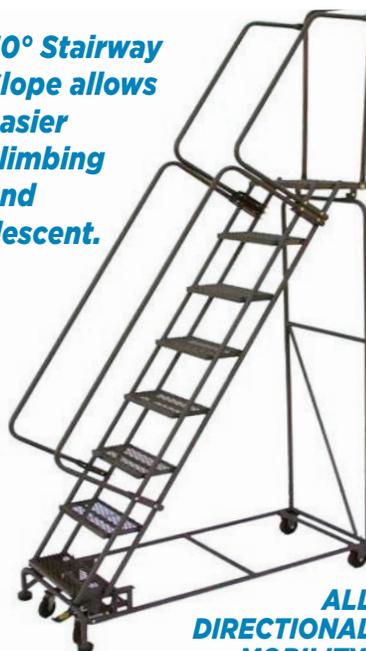

ALL DIRECTIONAL MOBILITY!

## WEIGHT ACTUATED ALL DIRECTION LOCKSTEP LADDERS

- 450 LB. CAPACITY!
- Patented lockstep - most durable in the industry, with All Direction Option
- Rolls on 4 swivel casters allowing ladder to move in all directions
- Your weight activates lockstep, locking ladder to the floor in the climbing position
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Built to meet OSHA and ANSI standards
- CAL OSHA available

## WEIGHT ACTUATED 50° STAIRWAY SLOPE OPTION LOCKSTEP LADDERS

- 450 LB. CAPACITY
- Patented lockstep - most durable in the industry
- Your weight activates the lockstep as you climb, locking ladder to the floor in the climbing position
- 50° stairway slope allows easier climbing and descent
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Available w/Rear Guard rail removed for easy walk through
- OSHA and ANSI standards
- CAL OSHA available

# TILT & ROLL LADDERS

- 450 LB. CAPACITY
- Balanced design allows ladder to tilt easily and roll effortlessly on two 4" large wheels
- 16" or 24" wide steps
- Specify tread type when ordering
- Ships unassembled in a box
- Fully assembled ladders available - specify (SU)
- Gray powder coat finish
- Built to OSHA and ANSI Standards



Non Straddle Base  
Model #TR-4

Straddle Base  
Model #HL-4

| # OF STEPS INCLUDING TOP STEP | Height Inches |          | TILT & ROLL MODEL # | BASE W" x L" | WEIGHT Lbs. | Extra Features            |
|-------------------------------|---------------|----------|---------------------|--------------|-------------|---------------------------|
|                               | TOP STEP      | OVER ALL |                     |              |             |                           |
| <b>TR-24" WIDE STEP</b>       |               |          |                     |              |             |                           |
| 2 STEP                        | 20            | 53       | <b>TR-2</b>         | 30 x 34      | 50          |                           |
| 3 STEP                        | 30            | 63       | <b>TR-3</b>         | 30 x 40      | 60          | WITH TR 20" DEEP TOP STEP |
| 4 STEP                        | 40            | 73       | <b>TR-4</b>         | 30 x 46      | 72          |                           |
| 5 STEP                        | 50            | 83       | <b>TR-5</b>         | 30 x 52      | 84          |                           |
| 6 STEP                        | 60            | 93       | <b>TR-6</b>         | 30 x 58      | 96          |                           |
| <b>HL-24" WIDE STEP</b>       |               |          |                     |              |             |                           |
| 2 STEP                        | 20            | 53       | <b>HL-2NS</b>       | 26 x 32      | 65          |                           |
| 3 STEP                        | 30            | 63       | <b>HL-3NS</b>       | 26 x 38      | 77          | WITH STRADDLE BASE        |
| 4 STEP                        | 40            | 73       | <b>HL-4NS</b>       | 26 x 44      | 89          |                           |
| 5 STEP                        | 50            | 83       | <b>HL-5NS</b>       | 26 x 50      | 101         |                           |
| 6 STEP                        | 60            | 93       | <b>HL-6NS</b>       | 26 x 56      | 113         |                           |
| <b>16" WIDE STEP</b>          |               |          |                     |              |             |                           |
| 2 STEP                        | 19            | 49       | <b>H218TR</b>       | 20 x 24      | 36          |                           |
| 3 STEP                        | 28.5          | 58.5     | <b>H318TR</b>       | 20 x 30      | 45          | SHIPS BOXED UNASSEMBLED   |
| 4 STEP                        | 38            | 68       | <b>H418TR</b>       | 20 x 36      | 56          |                           |
| <b>24" WIDE STEP</b>          |               |          |                     |              |             |                           |
| 2 STEP                        | 19            | 49       | <b>H226TR</b>       | 30 x 24      | 42          | 10" DEEP TOP STEP         |
| 3 STEP                        | 28.5          | 58.5     | <b>H326TR</b>       | 30 x 30      | 50          |                           |
| 4 STEP                        | 38            | 68       | <b>H426TR</b>       | 30 x 36      | 65          |                           |
| <b>16" WIDE STEP</b>          |               |          |                     |              |             |                           |
| 4 STEP                        | 40            | 73       | <b>FSTR418</b>      | 20 x 40      | 68          |                           |
| 5 STEP                        | 50            | 83       | <b>FSTR518</b>      | 20 x 47      | 75          | SHIPS BOXED UNASSEMBLED   |
| 6 STEP                        | 60            | 93       | <b>FSTR618</b>      | 24 x 54      | 83          |                           |
| <b>TR-24" WIDE STEP</b>       |               |          |                     |              |             |                           |
| 4 STEP                        | 40            | 73       | <b>FSTR426</b>      | 30 x 40      | 80          | 14" DEEP TOP STEP         |
| 5 STEP                        | 50            | 83       | <b>FSTR526</b>      | 30 x 47      | 87          |                           |
| 6 STEP                        | 60            | 93       | <b>FSTR626</b>      | 30 x 54      | 98          |                           |

BALANCED DESIGN EASILY TILTS AND ROLLS



**SHIPS BOXED**

- Lowers shipping costs
- Minimizes freight damage risk
- Boxes stack easily allowing cost effective stocking of ladders

**SPECIFY TREAD TYPE WHEN ORDERING:**

- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating

FOR PRICING CALL: (800) 762-8327 • WWW.BALLYMORE.COM

# FOLD & STORE LADDERS

- 350 LB. CAPACITY
- Can be easily folded for storage or transportation
- Tilt and roll mobility
- Large 10" rubber wheels roll easily on rough surfaces
- 14" deep top step
- Ships un-assembled
- Built to OSHA and ANSI standards



MODEL #FAWL-6



| # OF STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | MODEL #        | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|----------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |                |              |          |
| 5 STEP                        | 50"           | 83"      | <b>FAWL-5</b>  | 30 x 46      | 90       |
| 6 STEP                        | 60"           | 93"      | <b>FAWL-6</b>  | 30 x 52      | 100      |
| 7 STEP                        | 70"           | 103"     | <b>FAWL-7</b>  | 30 x 58      | 110      |
| 8 STEP                        | 80"           | 113"     | <b>FAWL-8</b>  | 30 x 64      | 120      |
| 9 STEP                        | 90"           | 123"     | <b>FAWL-9</b>  | 30 x 70      | 135      |
| 10 STEP                       | 100"          | 133"     | <b>FAWL-10</b> | 30 x 76      | 148      |
| 11 STEP                       | 110"          | 143"     | <b>FAWL-11</b> | 30 x 82      | 165      |
| 12 STEP                       | 120"          | 153"     | <b>FAWL-12</b> | 30 x 88      | 175      |

**SPECIFY TREAD TYPE WHEN ORDERING:**

- (X) Expanded Metal
- (P) Perforated
- (G) Heavy Duty Serrated Grating



Can be easily folded for storage or transport. Easy tilt & roll mobility



Optional Replaceable SKID PLATE FOR ROUGH SURFACES



## Heavy Duty Mobile Work Platforms increase productivity by simplifying maintenance operations.

- Designed to accommodate two workers.
- Also available in aluminum and stainless steel.
- **Add platform length to model # when ordering**



Available with left, right, or rear exit!

# HEAVY DUTY MOBILE WORK PLATFORMS

- **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**
- **800 LB. CAPACITY**
- Also available in aluminum and stainless steel
- Sturdy 1" tubular steel rails
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Meets OSHA and ANSI requirements
- Gray powder coat finish
- Ships unassembled in a box

### SINGLE ENTRY WORK PLATFORMS

| MODEL WITHOUT HANDRAILS |                 |                |                | 36" PLATFORM |              | 48" PLATFORM |              | 60" PLATFORM |              | 72" PLATFORM |              |
|-------------------------|-----------------|----------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| STEPS                   | PLATFORM HEIGHT | PLATFORM WIDTH | MODEL #        | WEIGHT       | BASE W" x D" |
| 3 STEP                  | 30"             | 24"            | <b>SNR3-24</b> | 105          | 33 x 48      | 127          | 33 x 60      | 149          | 33 x 72      | 171          | 33 x 84      |
| 3 STEP                  | 30"             | 36"            | <b>SNR3-36</b> | 121          | 38 x 48      | 143          | 38 x 60      | 150          | 38 x 72      | 187          | 38 x 84      |
| 4 STEP                  | 40"             | 24"            | <b>SNR4-24</b> | 121          | 33 x 54      | 143          | 33 x 66      | 165          | 33 x 78      | 187          | 33 x 90      |
| 4 STEP                  | 40"             | 36"            | <b>SNR4-36</b> | 138          | 38 x 54      | 160          | 38 x 66      | 182          | 38 x 78      | 204          | 38 x 90      |
| MODEL WITH HANDRAILS    |                 |                |                | 36" PLATFORM |              | 48" PLATFORM |              | 60" PLATFORM |              | 72" PLATFORM |              |
| STEPS                   | PLATFORM HEIGHT | PLATFORM WIDTH | MODEL #        | WEIGHT       | BASE W" x D" |
| 3 STEP                  | 30"             | 24"            | <b>SEP3-24</b> | 136          | 33 x 48      | 151          | 33 x 60      | 172          | 33 x 72      | 193          | 33 x 84      |
| 3 STEP                  | 30"             | 36"            | <b>SEP3-36</b> | 153          | 38 x 48      | 178          | 38 x 60      | 202          | 38 x 72      | 226          | 38 x 84      |
| 4 STEP                  | 40"             | 24"            | <b>SEP4-24</b> | 151          | 33 x 54      | 165          | 33 x 66      | 186          | 33 x 78      | 207          | 33 x 90      |
| 4 STEP                  | 40"             | 36"            | <b>SEP4-36</b> | 167          | 38 x 54      | 193          | 38 x 66      | 217          | 38 x 78      | 240          | 38 x 90      |
| 5 STEP                  | 50"             | 24"            | <b>SEP5-24</b> | 165          | 33 x 60      | 178          | 33 x 72      | 199          | 33 x 84      | 220          | 33 x 96      |
| 5 STEP                  | 50"             | 36"            | <b>SEP5-36</b> | 182          | 38 x 60      | 206          | 38 x 72      | 230          | 38 x 84      | 253          | 38 x 96      |
| 6 STEP                  | 60"             | 24"            | <b>SEP6-24</b> | 178          | 33 x 66      | 193          | 33 x 78      | 215          | 33 x 90      | 237          | 33 x 102     |
| 6 STEP                  | 60"             | 36"            | <b>SEP6-36</b> | 198          | 38 x 66      | 220          | 38 x 78      | 245          | 38 x 90      | 270          | 38 x 102     |
| 7 STEP                  | 70"             | 24"            | <b>SEP7-24</b> | 193          | 33 x 73      | 209          | 33 x 85      | 230          | 33 x 97      | 251          | 33 x 108     |
| 7 STEP                  | 70"             | 36"            | <b>SEP7-36</b> | 215          | 38 x 73      | 237          | 38 x 85      | 273          | 38 x 97      | 308          | 38 x 108     |



## DOUBLE ENTRY MOBILE WORK PLATFORMS

Extra Heavy Duty 800 Lb. Capacity!



### DOUBLE ENTRY WORK PLATFORMS

|        |                 |                |                | 36" PLATFORM |              | 48" PLATFORM |              | 60" PLATFORM |              | 72" PLATFORM |              |
|--------|-----------------|----------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| STEPS  | PLATFORM HEIGHT | PLATFORM WIDTH | MODEL #        | WEIGHT       | BASE W" x D" |
| 3 STEP | 30"             | 24"            | <b>DEP3-24</b> | 202          | 33 x 60      | 220          | 33 x 72      | 240          | 33 x 84      | 260          | 33 x 96      |
| 3 STEP | 30"             | 36"            | <b>DEP3-36</b> | 226          | 38 x 60      | 242          | 38 x 72      | 262          | 38 x 84      | 282          | 38 x 96      |
| 4 STEP | 40"             | 24"            | <b>DEP4-24</b> | 227          | 33 x 73      | 245          | 33 x 85      | 285          | 33 x 97      | 284          | 33 x 108     |
| 4 STEP | 40"             | 36"            | <b>DEP4-36</b> | 248          | 38 x 73      | 264          | 38 x 85      | 289          | 38 x 97      | 306          | 38 x 108     |
| 5 STEP | 50"             | 24"            | <b>DEP5-24</b> | 251          | 33 x 85      | 271          | 33 x 97      | 311          | 33 x 109     | 308          | 33 x 121     |
| 5 STEP | 50"             | 36"            | <b>DEP5-36</b> | 270          | 38 x 85      | 292          | 38 x 97      | 314          | 38 x 109     | 330          | 38 x 121     |
| 6 STEP | 60"             | 24"            | <b>DEP6-24</b> | 276          | 33 x 98      | 295          | 33 x 110     | 333          | 33 x 121     | 332          | 33 x 133     |
| 6 STEP | 60"             | 36"            | <b>DEP6-36</b> | 297          | 38 x 98      | 314          | 38 x 110     | 334          | 38 x 121     | 352          | 38 x 133     |
| 7 STEP | 70"             | 24"            | <b>DEP7-24</b> | 300          | 33 x 110     | 319          | 33 x 122     | 339          | 33 x 134     | 356          | 33 x 146     |
| 7 STEP | 70"             | 36"            | <b>DEP7-36</b> | 319          | 38 x 110     | 341          | 38 x 122     | 362          | 38 x 134     | 380          | 38 x 146     |

AVAILABLE IN STANDARD AND STAIRWAY SLOPE

- **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**
- **800 LB. CAPACITY**
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Meets OSHA and ANSI requirements

# HEAVY DUTY ADJUSTABLE HEIGHT STEEL WORK PLATFORMS

- **Heavy Duty 500 lb. Capacity**
- Simply turn feet to adjust height
- Gray Powder Coat Finish
- Slip resistant heavy duty serrated grating

- Place several units together to create larger work areas
- Provide shorter workers with a more comfortable work position
- Heavy duty serrated grating provides excellent slip resistance
- Platforms 24" - 48" long, have 4 legs, longer platforms have 6 legs

**For Custom Platform, Ladder or Lift Solutions Call Today: 800-762-8327**



**Make Uneven Surfaces Level**

| HEIGHTS from 5" to 8" |         |        | HEIGHTS from 9" to 14" |         |
|-----------------------|---------|--------|------------------------|---------|
| MODEL #               | W" x L" | Weight | MODEL #                | W" x L" |
| <b>AWP5-2424</b>      | 24 x 24 | 38     | <b>AWP9-2424</b>       | 24 x 24 |
| <b>AWP5-2436</b>      | 24 x 36 | 52     | <b>AWP9-2436</b>       | 24 x 36 |
| <b>AWP5-2448</b>      | 24 x 48 | 66     | <b>AWP9-2448</b>       | 24 x 48 |
| <b>AWP5-2459</b>      | 24 x 59 | 80     | <b>AWP9-2459</b>       | 24 x 59 |
| <b>AWP5-2471</b>      | 24 x 71 | 106    | <b>AWP9-2471</b>       | 24 x 71 |
| <b>AWP5-2497</b>      | 24 x 97 | 138    | <b>AWP9-2497</b>       | 24 x 97 |

## Heavy Duty Fork Deck



- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards & locking gate
- 60" high screen shields operator from fork lift mast
- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- 4" swivel casters on base for easy positioning
- Safety orange powder coat
- Ships boxed, easy assembly
- ANSI B56.10 standards

**Extra Heavy Duty 1,000 Lb. Capacity!**



| MODEL           | L" X W"   | WEIGHT |
|-----------------|-----------|--------|
| <b>FD-O-C</b>   | 36" x 36" | 135    |
| <b>FD-48-C</b>  | 48" x 36" | 157    |
| <b>FD-40-48</b> | 40" x 48" | 164    |

**OPTIONAL ACCESSORIES**

|                                |    |
|--------------------------------|----|
| Fluorescent Bulb Caddy         | 26 |
| Tool Tray (Bolt on or Hang on) | 14 |
| All welded available           | -  |

**• Ships Boxed for Freight Savings & Quick, Easy Assembly**

## FORK DECK MAINTENANCE PLATFORM

- **1,000 lb. CAPACITY**
- Turn your fork truck into a personnel lift. Safe and economical access to heights above those reached by rolling ladders.

## TRUCK/DOCK ACCESS LADDERS

- **450 lb. CAPACITY**
- Ideal for accessing trucks or loading docks
- 21" deep top step
- 10" rear rubber wheels - Great on parking lots or rough surfaces
- Gray powder coat finish
- Built to OSHA and ANSI standards

- Rugged 2" x 1" rectangular tubing base frame and rear vertical
- Heavy duty serrated grating step tread
- Lightweight - lift and roll wheelbarrow portability
- Available in both 59° ladder slope or gradual 50° stairway slope
- No Rear Guardrail standard for easy walk through (includes snap chain)



| LADDER SLOPE 59° |                 |                |            |              |             |
|------------------|-----------------|----------------|------------|--------------|-------------|
| MODEL #          | TOP STEP HEIGHT | OVERALL HEIGHT | STEP WIDTH | BASE W" x L" | WEIGHT LBS. |
| <b>TA-5-24</b>   | 50"             | 80"            | 24"        | 32" x 53"    | 145         |
| <b>TA-5-36</b>   | 50"             | 80"            | 36"        | 44" x 53"    | 170         |

| STAIRWAY LADDER SLOPE 50 DEGREE |                 |                |            |              |             |
|---------------------------------|-----------------|----------------|------------|--------------|-------------|
| MODEL #                         | TOP STEP HEIGHT | OVERALL HEIGHT | STEP WIDTH | BASE W" x L" | WEIGHT LBS. |
| <b>SW-TA-5-24</b>               | 50"             | 80"            | 24"        | 32" x 60"    | 155         |
| <b>SW-TA-5-36</b>               | 50"             | 80"            | 36"        | 44" x 60"    | 180         |



## Corrosion Resistant • Light Weight • Aluminum Rolling Ladders

Aluminum ladders are lightweight, weather resistant, durable & easy to transport, with noncorrosive properties that make them the ideal choice for many applications in both outdoor and indoor environments.

| # OF STEPS INCLUDING TOP STEP | Height Inches |          | SPRING LOADED CASTERS MODEL # | TILT & ROLL MODEL # | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|-------------------------------|---------------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |                               |                     |              |          |
| <b>18" WIDE STEPS</b>         |               |          |                               |                     |              |          |
| 2 STEP NO RAILS               | 19            | 19       | <b>A2S*</b>                   | -                   | 20 x 19      | 15       |
| 3 STEP NO RAILS               | 28.5          | 28.5     | <b>A3S*</b>                   | -                   | 20 x 25      | 20       |
| 4 STEP NO RAILS               | 38            | 38       | <b>A4S</b>                    | -                   | 20 x 31      | 29       |
| 2 STEP                        | 19            | 49       | <b>A2SH</b>                   | <b>A2SH-TR</b>      | 20 x 19      | 21       |
| 3 STEP                        | 28.5          | 58.5     | <b>A3SH</b>                   | <b>A3SH-TR</b>      | 20 x 25      | 27       |
| 4 STEP                        | 38            | 68       | <b>A4SH</b>                   | <b>A4SH-TR</b>      | 20 x 31      | 34       |
| <b>24" WIDE STEPS</b>         |               |          |                               |                     |              |          |
| 2 STEP NO RAILS               | 19            | 19       | <b>A2S30*</b>                 | -                   | 30 x 19      | 22       |
| 3 STEP NO RAILS               | 28.5          | 28.5     | <b>A3S30</b>                  | -                   | 30 x 25      | 28       |
| 4 STEP NO RAILS               | 38            | 38       | <b>A4S30</b>                  | -                   | 30 x 31      | 35       |
| 2 STEP                        | 19            | 49       | <b>A2SH30</b>                 | <b>A2SH30-TR</b>    | 30 x 19      | 28       |
| 3 STEP                        | 28.5          | 58.5     | <b>A3SH30</b>                 | <b>A3SH30-TR</b>    | 30 x 25      | 34       |
| 4 STEP                        | 38            | 68       | <b>A4SH30</b>                 | <b>A4SH30-TR</b>    | 30 x 31      | 41       |
| 5 STEP                        | 47.5          | 77.5     | <b>A5SH30</b>                 | <b>A5SH30-TR</b>    | 30 x 37      | 49       |
| 6 STEP                        | 57            | 87       | <b>A6SH30</b>                 | <b>A6SH30-TR</b>    | 30 x 43      | 60       |
| 7 STEP                        | 66.5          | 96.5     | <b>A7SH30</b>                 | <b>A7SH30-TR</b>    | 30 x 49      | 67       |



## ALUMINUM LADDERS

- **350 LB. CAPACITY**
- All welded
- Aluminum mill finish, industrial grade welds
- Ideal for use in banks, libraries & hospitals and wash down applications
- Lightweight design
- Non-magnetic and non-sparking
- Paint-free for food and pharmaceutical applications
- Solid ribbed tread or heavy duty serrated grating
- 10" standard deep top step
- Optional 20" deep top step
- Built to OSHA & ANSI standards

Specify Tread Type when Ordering:

- Ribbed Tread (R)
- Heavy Duty Serrated Grating (G)

\* Eligible for UPS. Tilt and roll casters add 5" to base length.

NOTE: Aluminum ladders are subject to a 50% restocking charge

### POPULAR LOCK-N-STOCK - NOW AVAILABLE IN ALUMINUM

The feature is the drastically reduced weight. The benefit is less effort to maneuver the ladder leading to better productivity. Two Versions: a 7" deep top step with 22" high handles and a 10" deep top step with 30" high handles along with a rear guardrail. Lock the ALUMINUM stair section in place and **CLIMB IT- ROLL-IT- FOLD IT AND STORE IT!!**



| MODEL NUMBER    | STEPS INCLUDING TOP STEP | TOP STEP HEIGHT | WEIGHT LBS. | OPEN WIDTH & LENGTH | FOLDED SIZE  | COLOR |
|-----------------|--------------------------|-----------------|-------------|---------------------|--------------|-------|
| <b>ALS3247</b>  | 3                        | 28.5"           | 23          | 24 x 23             | 10 x 24 x 52 | BLUE  |
| <b>ALS4247</b>  | 4                        | 38"             | 28          | 24 x 30             | 10 x 24 x 65 | BLUE  |
| <b>ALS32410</b> | 3                        | 28.5"           | 26          | 24 x 28             | 14 x 24 x 62 | BLUE  |
| <b>ALS42410</b> | 4                        | 38"             | 31          | 24 x 35             | 14 x 24 x 72 | BLUE  |

## NEW! ALUMINUM LOCK-N-STOCK

- **300 LB. CAPACITY**
- Welded Construction
- Perforated Tread
- No hinge to break
- Easy to maneuver in the open or closed position
- Locks in the folded or climbing position
- Approx 10" deep when folded and 14" deep on 10" deep top step models
- Built to ANSI standards
- Blue powder coat finish

### ALUMINUM LIFT & ROLL WHEELBARROW STYLE LADDERS

Features 10" rubber wheels for easy portability even on rough surfaces. 14"-deep top step provides range of motion when working at higher levels. Nonmagnetic, non-sparking & paint-free, aluminum ladders are acceptable for pharmaceutical & food processing industries. Industrial-grade welds allow them to be used in wash-down applications.

SPECIFY TREAD TYPE WHEN ORDERING: Ribbed Tread (R) • Heavy Duty Serrated Grating (G)

| STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | 18" WIDE TREAD |               | 24" WIDE TREAD* |                 |          |
|--------------------------|---------------|----------|----------------|---------------|-----------------|-----------------|----------|
|                          | TOP STEP      | OVER ALL | BASE W" X L"   | MODEL #       | WGT Lbs.        | MODEL #         | WGT Lbs. |
| 5 STEP                   | 50"           | 83"      | 30 x 47        | <b>ALWB5</b>  | 42              | <b>ALWB530</b>  | 50       |
| 6 STEP                   | 60"           | 93"      | 30 x 53        | <b>ALWB6</b>  | 50              | <b>ALWB630</b>  | 60       |
| 7 STEP                   | 70"           | 103"     | 30 x 60        | <b>ALWB7</b>  | 58              | <b>ALWB730</b>  | 70       |
| 8 STEP                   | 80"           | 113"     | 36 x 66        | <b>ALWB8</b>  | 66              | <b>ALWB830</b>  | 80       |
| 9 STEP                   | 90"           | 123"     | 36 x 72        | <b>ALWB9</b>  | 74              | <b>ALWB930</b>  | 90       |
| 10 STEP                  | 100"          | 133"     | 36 x 78        | <b>ALWB10</b> | 82              | <b>ALWB1030</b> | 100      |

\*Models with 24" wide steps have 36" wide base

14" DEEP TOP STEP



## WHEEL BARROW STYLE ALUMINUM LADDERS

- **300 LB. CAPACITY**
- All welded
- 14" deep top step standard
- 10" rear rubber wheels - Great on rough surfaces
- Lightweight lift and roll wheelbarrow portability
- Built to OSHA and ANSI standards

10" RUBBER WHEELS



## Stainless Steel Ladders Ideal for Wash Down & Corrosive Environments

# STAINLESS STEEL ROLLING LADDERS

- **450 LB. CAPACITY**
- Ideal for wash down and corrosive environments
- Type T304 Stainless Steel construction
- 1-3 step ladders are all welded and have a 10" deep top step
- 4-12 step ladders have 14" deep top step standard
- Deeper top steps available on all models
- Bead blasted for uniform finish
- Casters for lock step ladders are stainless steel
- Spring Loaded casters are stainless and springs are carbon steel
- Built to OSHA and ANSI standards
- CAL OSHA available

**AVAILABLE TREAD TYPES**  
Please specify when ordering.



Perforated Tread (P)



Heavy Duty Serrated Grating (G)

Lockstep Ladder shown with perforated tread Built to OSHA and ANSI



Note: All stainless ladders are manufactured with industrial grade welds, not recommended for clean rooms.

\* Eligible for UPS. Tilt and roll casters add 5" to base length • **NOTE: Stainless Steel ladders subject to a 50% restocking charge**

| # OF STEPS INCLUDING TOP STEP | Height Inches |          | SPRING LOADED CASTERS MODEL # | TILT & ROLL MODEL # | BASE W" x L" | WGT Lbs. |
|-------------------------------|---------------|----------|-------------------------------|---------------------|--------------|----------|
|                               | TOP STEP      | OVER ALL |                               |                     |              |          |
| <b>16" WIDE STEPS</b>         |               |          |                               |                     |              |          |
| 1 STEP NO RAILS               | 12            | 12       | <b>SS1N*</b>                  | -                   | 18 x 20      | 24       |
| 2 STEP NO RAILS               | 19            | 19       | <b>SS2N*</b>                  | -                   | 20 x 19      | 28       |
| 3 STEP NO RAILS               | 28.5          | 28.5     | <b>SS3N*</b>                  | -                   | 20 x 25      | 35       |
| 2 STEP                        | 19            | 49       | <b>SS220</b>                  | <b>SSTR220</b>      | 20 x 19      | 40       |
| 3 STEP                        | 28.5          | 58.5     | <b>SS320</b>                  | <b>SSTR320</b>      | 20 x 25      | 46       |
| 4 STEP                        | 40            | 73       | <b>SS420</b>                  | <b>SSTR420</b>      | 20 x 38      | 70       |
| 5 STEP                        | 50            | 83       | <b>SS520</b>                  | <b>SSTR520</b>      | 20 x 44      | 77       |
| 6 STEP                        | 60            | 93       | <b>SS624</b>                  | <b>SSTR624</b>      | 24 x 50      | 81       |
| 7 STEP                        | 70            | 103      | <b>SS724</b>                  | -                   | 24 x 56      | 95       |
| <b>24" WIDE STEPS</b>         |               |          |                               |                     |              |          |
| 2 STEP NO RAILS               | 19            | 19       | <b>SS2N30</b>                 | -                   | 30 x 19      | 40       |
| 3 STEP NO RAILS               | 28.5          | 28.5     | <b>SS3N30</b>                 | -                   | 30 x 25      | 44       |
| 2 STEP                        | 19            | 49       | <b>SS230</b>                  | <b>SSTR230</b>      | 30 x 19      | 43       |
| 3 STEP                        | 28.5          | 58.5     | <b>SS330</b>                  | <b>SSTR330</b>      | 30 x 25      | 55       |
| 4 STEP                        | 40            | 73       | <b>SS430</b>                  | <b>SSTR430</b>      | 30 x 38      | 85       |
| 5 STEP                        | 50            | 83       | <b>SS530</b>                  | <b>SSTR530</b>      | 30 x 44      | 92       |
| 6 STEP                        | 60            | 93       | <b>SS630</b>                  | <b>SSTR630</b>      | 30 x 50      | 105      |
| 7 STEP                        | 70            | 103      | <b>SS730</b>                  | -                   | 30 x 56      | 115      |

### SPRING LOADED CASTER MODELS



Spring loaded casters retract under user's weight. Non-marring floor caps grip floor for stable stationary positioning.



### TILT & ROLL

shown with optional 20" deep top steps



\* Fold-N-Store Capacity = 350 Lbs.

| STEPS INCLUDING TOP STEP | HEIGHT INCHES |          | BASE W" x L" | WGT Lbs. | LOCKSTEP MODEL # |
|--------------------------|---------------|----------|--------------|----------|------------------|
|                          | TOP STEP      | OVER ALL |              |          |                  |
| <b>16" WIDE STEPS</b>    |               |          |              |          |                  |
| 5 STEP                   | 50"           | 83"      | 24 x 46      | 95       | <b>SS052414</b>  |
| 6 STEP                   | 60"           | 93"      | 24 x 52      | 105      | <b>SS062414</b>  |
| 7 STEP                   | 70"           | 103"     | 24 x 58      | 114      | <b>SS072414</b>  |
| 8 STEP                   | 80"           | 113"     | 24 x 64      | 132      | <b>SS082414</b>  |
| <b>24" WIDE STEPS</b>    |               |          |              |          |                  |
| 5 STEP                   | 50"           | 83"      | 32 x 46      | 113      | <b>SS053214</b>  |
| 6 STEP                   | 60"           | 93"      | 32 x 52      | 126      | <b>SS063214</b>  |
| 7 STEP                   | 70"           | 103"     | 32 x 58      | 147      | <b>SS073214</b>  |
| 8 STEP                   | 80"           | 113"     | 32 x 64      | 165      | <b>SS083214</b>  |
| 9 STEP                   | 90"           | 123"     | 32 x 70      | 180      | <b>SS093214</b>  |
| 10 STEP                  | 100"          | 133"     | 32 x 76      | 199      | <b>SS103214</b>  |
| 11 STEP                  | 110"          | 143"     | 32 x 82      | 211      | <b>SS113214</b>  |
| 12 STEP                  | 120"          | 153"     | 32 x 88      | 227      | <b>SS123214</b>  |

### STAINLESS STEEL FOLD-N-STORE LADDERS

are bead-blasted to provide smooth uniform finish and feature 16" wide steps.



| FOLD-N-STORE |          |                  |
|--------------|----------|------------------|
| BASE W" x L" | WGT Lbs. | MODEL #          |
| 30 x 48      | 82       | <b>SSFAWL-5</b>  |
| 30 x 54      | 92       | <b>SSFAWL-6</b>  |
| 30 x 60      | 103      | <b>SSFAWL-7</b>  |
| 30 x 66      | 118      | <b>SSFAWL-8</b>  |
| 30 x 72      | 133      | <b>SSFAWL-9</b>  |
| 30 x 78      | 149      | <b>SSFAWL-10</b> |
| 30 x 84      | 165      | <b>SSFAWL-11</b> |
| 30 x 90      | 180      | <b>SSFAWL-12</b> |

## Cantilever Ladders • Heavy Duty Construction for Heavy Duty Applications!

The cantilever series of steel rolling ladders by Ballymore is the ideal solution for working or performing maintenance in elevated areas that are difficult to access. The cantilever is designed to be highly maneuverable and engineered for safety. Each cantilever is safety tested to ensure it will provide a safe elevated working environment

| MODEL |                 |                    |                |              | 14" OVERHANG |              | 28" OVERHANG |              |
|-------|-----------------|--------------------|----------------|--------------|--------------|--------------|--------------|--------------|
| STEPS | PLATFORM HEIGHT | VERTICAL CLEARANCE | PLATFORM WIDTH | MODEL #      | WEIGHT       | BASE W" x D" | WEIGHT       | BASE W" x D" |
| 6     | 60"             | 57"                | 24"            | <b>CL-6</b>  | 468          | 32 x 46      | 735          | 32 x 53      |
| 7     | 70"             | 67"                | 24"            | <b>CL-7</b>  | 442          | 32 x 52      | 695          | 32 x 52      |
| 8     | 80"             | 77"                | 24"            | <b>CL-8</b>  | 412          | 32 x 58      | 640          | 32 x 58      |
| 9     | 90"             | 87"                | 24"            | <b>CL-9</b>  | 405          | 32 x 65      | 583          | 32 x 65      |
| 10    | 100"            | 97"                | 24"            | <b>CL-10</b> | 401          | 32 x 71      | 554          | 32 x 71      |
| 11    | 110"            | 107"               | 24"            | <b>CL-11</b> | 405          | 32 x 77      | 544          | 32 x 77      |
| 12    | 120"            | 117"               | 24"            | <b>CL-12</b> | 409          | 32 x 84      | 537          | 32 x 84      |
| 13    | 130"            | 127"               | 24"            | <b>CL-13</b> | 417          | 40 x 90      | 520          | 40 x 90      |
| 14    | 140"            | 137"               | 24"            | <b>CL-14</b> | 450          | 40 x 96      | 528          | 40 x 96      |
| 15    | 150"            | 147"               | 24"            | <b>CL-15</b> | 458          | 40 x 103     | 536          | 40 x 103     |

| MODEL |                 |                    |                |              | 35" OVERHANG |              | 42" OVERHANG |              |
|-------|-----------------|--------------------|----------------|--------------|--------------|--------------|--------------|--------------|
| STEPS | PLATFORM HEIGHT | VERTICAL CLEARANCE | PLATFORM WIDTH | MODEL #      | WEIGHT       | BASE W" x D" | WEIGHT       | BASE W" x D" |
| 6     | 60"             | 57"                | 24"            | <b>CL-6</b>  | 763          | 32 x 60      | 791          | 32 x 67      |
| 7     | 70"             | 67"                | 24"            | <b>CL-7</b>  | 773          | 32 x 59      | 801          | 32 x 66      |
| 8     | 80"             | 77"                | 24"            | <b>CL-8</b>  | 779          | 32 x 58      | 807          | 32 x 65      |
| 9     | 90"             | 87"                | 24"            | <b>CL-9</b>  | 697          | 32 x 65      | 811          | 32 x 65      |
| 10    | 100"            | 97"                | 24"            | <b>CL-10</b> | 668          | 32 x 71      | 757          | 32 x 71      |
| 11    | 110"            | 107"               | 24"            | <b>CL-11</b> | 633          | 32 x 77      | 722          | 32 x 77      |
| 12    | 120"            | 117"               | 24"            | <b>CL-12</b> | 601          | 32 x 84      | 690          | 32 x 84      |
| 13    | 130"            | 127"               | 24"            | <b>CL-13</b> | 609          | 40 x 90      | 673          | 40 x 90      |
| 14    | 140"            | 137"               | 24"            | <b>CL-14</b> | 592          | 40 x 96      | 656          | 40 x 96      |
| 15    | 150"            | 147"               | 24"            | <b>CL-15</b> | 600          | 40 x 103     | 664          | 40 x 103     |

Weight is a combination of the ladder and counter weight, does not include skidding, add 120 lbs for packaging.



BASE FRAME AND REAR VERTICAL RUGGED 2" x 1"



SPECIAL PURPOSE LADDER AS DEFINED BY ANSI-14.7

## CANTILEVER SERIES LADDERS

- **300 LBS. CAPACITY**  
Higher weight capacities available - call for details
- 59 degree slope
- Heavy-duty 1" x 2" rectangular frame
- High quality 5" x 2" locking casters
- Available with Rear Guardrail removed for easy walk through
- Powder coat finish
- Ships KD to prevent freight damage and lower freight cost

Add platform overhang length to model number when ordering

## Adjustable Height Cantilevered Platforms provide safe access to Tank Trucks, Railroad Cars, Conveyor Systems, Machinery or other applications with limited access.

Shown with optional Safety Orange finish & 30" extension railing



### FEATURES:

- 9' to 13' adjustable work height
- Provides easy access to tank trucks, railroad cars & other cantilevered applications
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises & lowers cantilevered platform
- Open serrated grating steps and deck tread.
- Slip resistant climbing rungs
- 28"W x 60"L base, fixed outriggers spread to 69"
- Full rails on both sides, gates at each end of platform
- 2 swivel & 2 rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Fixed platform height available
- Gray coat finish (Standard)

### TANK TOP LIFTS

| Model Number    | Platform Max | Height Min | Platform Length | Platform Width | Underclearance Height    | Weight Lbs. |
|-----------------|--------------|------------|-----------------|----------------|--------------------------|-------------|
| <b>TT-913</b>   | 13' 8"       | 9' 4"      | 48"             | 24"            | Adjustable 9' to 13'     | 1525        |
| <b>TT-913F</b>  | 13' 8"       | 9' 4"      | 48"             | 24"            | Non-Adjustable 9' to 13' | 1450        |
| <b>TT-7-11</b>  | 11' 8"       | 7' 4"      | 48"             | 24"            | Adjustable 7' to 11'     | 1450        |
| <b>TT-11-15</b> | 15' 8"       | 11' 4"     | 48"             | 24"            | Adjustable 11' to 15'    | 1625        |

New Sizes Available!

## MANUALLY PROPELLED ADJUSTABLE HEIGHT TANK TOP LIFTS

- **300 LB. CAPACITY**
- OPTIONAL ACCESSORIES**
  - AC electric power
  - DC electric power
  - Air-Hydraulic power
  - Tool Tray
  - Fluorescent tube holder
  - Platform duplex receptacle
  - Removable 30" extension rail
- Safety Orange Powder Coat**
- For outdoor applications primer undercoat and powder coat finish is recommended.

### Three power options:

- Plug in 120V AC w/thermal overload protection
- Independent 12V DC deep cycle system with battery, charger and double solenoid for added safety
- Air hydraulic power requiring 90 CFM with 90 PSI pressure

Custom Engineered Vertical Access Solutions Available



# BALLYMORE LIFTS!

DRIVING INNOVATION TO NEW HEIGHTS



## Ballymore Introduces New Wider Base and Cargo Deck Models

### FEATURES:

- PS-12 and PS-15 models now include a larger 24"x32" cargo deck
- 12 volt DC power (AGM battery) with mounted charger included - Easily recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for safety
- 100+ raise and lower cycles between charges
- Key lock prevents unauthorized use
- Optional sensing system creates a 2' safety zone around lift alerting operator of activity below lift
- Meets or exceeds ANSI safety standards



## MANUALLY PROPELLED HYDRAULIC POWER STOCKER LIFTS

- 450 LB. CAPACITY (PS-10)
- 650 LB. CAPACITY (PS-12 AND PS-15)

With this ground entry, manually propelled, hydraulic order picker merchandise can be raised to shelf level and easily slid on or off shelf to minimize lifting, improving productivity and employee safety. It's easy to operate and ideal for retail storerooms and stockrooms.

**No Outriggers Required. Floor Locks Secure Power Stocker Safely in Place!**

| MODEL # | WORKING HEIGHT | MERCH DECK MAX HEIGHT | FOOTPRINT W" x L" | OVERALL HEIGHT (LOWERED) | POWER  | WEIGHT LBS. |
|---------|----------------|-----------------------|-------------------|--------------------------|--------|-------------|
| PS-10   | 14'            | 9'                    | 36" x 54"         | 76"                      | 12V DC | 1022        |
| PS-12*  | 18'            | 13'                   | 42" x 54"         | 94"                      | 12V DC | 1089        |
| PS-15*  | 21'            | 15'9"                 | 43" x 60"         | 90"                      | 12V DC | 1189        |

\* Available with optional sensing system

**The ideal lift for the shop, stock room or retail floor!**

Power Stocker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



FOR CUSTOM ENGINEERED SOLUTIONS • CALL: (800) 762-8327

## The New Drivable Power Stocker is NOW AVAILABLE!

Our New Drivable Power Stocker, Model Number PS-12D has all the ergonomic features and benefits as our push-able models, including ground entry and the ability to raise merchandise to shelf levels while easily sliding the product on or off the shelf. This minimizes the back strains of lifting and at the same time improves productivity and safety.

The Drivable Power Stocker is easy to operate. The control(joy) stick makes navigation simple and safe. The Drivable Power Stocker has two speeds and can be operated in the raised position. The PS-12D comes with a Gate Safety Alarm, Manual Lowering Valve, Warning Lights plus Emergency Stop Buttons- all Standard!

### FEATURES:

- Large Cargo Deck 32"(Wide)X 28"(Deep)
- Standing Platform 28"(Wide)X 19"(Deep)
- 650 lbs. Capacity-Merchandise and Operator
- 2-12V Batteries.
- Power Cord for charging
- Easy charging using standard 110V outlet
- Key Lock prevents unauthorized usage
- Ground and Control Box Operations
- Two Speeds
- Comes in orange or blue



## DRIVABLE POWER STOCKER LIFTS

- 650 LB. CAPACITY (PS-12D) (Operator & Inventory)

**NEW**

Power Stocker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.

| MODEL # | WORKING HEIGHT | MERCH DECK MAX HEIGHT | FOOTPRINT W" x L" | OVERALL HEIGHT (LOWERED) | POWER | WEIGHT LBS. |
|---------|----------------|-----------------------|-------------------|--------------------------|-------|-------------|
| PS-12D* | 18'            | 13'                   | 42"X 60"          | 96"                      | 2-12V | 1600        |

\* Available with optional sensing system





## MINI SCISSOR LIFT

- **500 LB. CAPACITY**
- Manually Propelled
- Working heights up to 19'
- Maximum raised platform height of 9' 10" to 12' 9"
- 28" x 50" Platforms
- Easy to roll on 6" casters
- 12 Volt DC Powered
- Power Unit stored in a lockable slide out drawer
- Battery charge indicator is included
- Emergency stop button
- Emergency lowering system
- Forklift Pockets
- Meets/exceeds ANSI safety standards



**PUSHABLE MODELS**

| MODEL #       | WORKING HEIGHT | PLATFORM MAX. | PLATFORM MIN. | FOOTPRINT W"x L" | OVERALL HEIGHT (Lowered) | WEIGHT (Lbs.) |
|---------------|----------------|---------------|---------------|------------------|--------------------------|---------------|
| <b>MSL-10</b> | 16'            | 9' 10"        | 26"           | 30" x 57"        | 77"                      | 1200          |
| <b>MSL-12</b> | 19'            | 12' 9"        | 26"           | 30" x 57"        | 77"                      | 1260          |

**NO OUTRIGGERS REQUIRED!**  
*Floor Locks secure lift safely to the floor.*  
*Small footprint enables easy access to limited access areas*



Ballymore's mini scissor lift work platforms are uniquely engineered for easy use and maneuverability in narrow aisles and tight access areas. It's the perfect lift for one man maintenance jobs in high, hard to reach areas, providing safe vertical access to working heights up to 19'

Mini Scissor Lifts are manufactured from durable, heavy duty steel. Safety features include top and mid rail guards with a hinged gate for easy and safe access. Platform includes toe guards to prevent slips and falls.

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

## THE MINI MERCHANDISE LIFT (BMML-9)

- **500LB. CAPACITY**
- Base = 26" Wide X 48" Long - (55" overall length including push rails)
- Merchandise Shelf = 25" Wide X 17" Long
- Overall Height = 55"
- Fully Lowered Standing Platform = 13"
- Standing Platform = 23<sup>1/2</sup>" Wide X 20" deep
- Wheels - 4- 6" diameter
- 2 - 2" Wide Locking Swivels
- 2 - 2" Wide Rigid Wheels
- Shelf Height Maximum = 110"
- Standing Platform Maximum Height = 71"
- Color Yellow
- Power - 12V
- Weight = 650 lbs Approximate
- Shelf Capacity - 150lbs (tested)

## THE MINI MERCHANDISE LIFT

Footprint only 26"W X 48"L!  
 Great for tight aisle ways!



### Features

- Shelf Lip to prevent packages from falling off the front of the lift
- Safety Control Panel- 3 button plus Kill Switch
- Manual Lowering Valve
- Limit Switch included. This will prohibit the lift from ascending without the casters being locked to the floor.
- "Push" handles added to the front and back of the lift for easy maneuverability
- Safety shield to prevent access to internals
- Enlarged Standing Platform for added safety and comfort



DISCOVER BALLYMORE'S NEWEST 2 OCCUPANT DRIVABLE SCISSOR LIFTS

# INNOVATION DRIVEN TO NEW HEIGHTS



**Featuring  
An Extendable  
Roll Out Cantilever  
Platform**

The roll-out cantilevered platform provides safer access to machinery and equipment.



Gradeability



0° Turn Radius



## DRIVABLE SCISSOR LIFTS

**Features:**

- Extendable Roll-Out Cantilever Platform
- Drivable at full heights
- Self-Locking safety gate
- Emergency Stop Button
- Emergency Lowering System
- Forklift Pockets
- Powder Coat finish
- DMSL-10 & DMSL-12 Maximum Occupants = 1
- Meets or Exceeds ANSI Standards

| Model Number      | Weight Capacity | Working Height | Platform Height |     | Platform W x L (Outer Dimension) | Platform Extension | Base W x L | Overall Height | Weight (lbs) | Power - Batteries |
|-------------------|-----------------|----------------|-----------------|-----|----------------------------------|--------------------|------------|----------------|--------------|-------------------|
|                   |                 |                | Max             | Min |                                  |                    |            |                |              |                   |
| <b>DMSL-10</b>    | 500             | 16'            | 10'             | 36" | 28" x 50"                        | 22"                | 30" x 57"  | 80"            | 1825         | 2 - 12V           |
| <b>DMSL-12</b>    | 500             | 19'            | 12'             | 36" | 28" x 50"                        | 22"                | 30" x 57"  | 80"            | 1900         | 2 - 12V           |
| <b>DMSL-19</b>    | 500             | 25'            | 19'             | 42" | 29" x 66"                        | 36"                | 30" x 74"  | 86"            | 3164         | 4 - 6V            |
| <b>DMSL-26</b>    | 500             | 32'            | 26'             | 48" | 32" x 90"                        | 36"                | 32" x 98"  | 92"            | 4718         | 4 - 6V            |
| <b>DMSL-26(W)</b> | 1000            | 32'            | 26'             | 48" | 44" x 90"                        | 36"                | 46" x 98"  | 92"            | 4884         | 4 - 6V            |
| <b>DSL-32</b>     | 700             | 38'            | 32'             | 48" | 44" x 90"                        | 36"                | 46" x 98"  | 96"            | 5533         | 4 - 6V            |
| <b>DSL-40</b>     | 550             | 46'            | 40'             | 58" | 44" x 90"                        | 36"                | 47" x 98"  | 102"           | 6834         | 4 - 12V           |
| <b>DSL-45</b>     | 500             | 51'            | 45'             | 58" | 44" x 104"                       | 36"                | 55" x 112" | 102"           | 7320         | 4 - 12V           |



# MOBILE VERTICAL SINGLE PERSON LIFT

**300 lb. Capacity**

- Manually propelled maintenance lift
- Working heights to 35'
- Compact design for easy storage
- 29x56 base allows lift to roll through standard doorways
- Easy to use outriggers extend from base to provide excellent stability
- 12 Volt DC Power (raise and lower)



## MOBILE VERTICAL LIFT • MANUALLY PROPELLED LIFT

| MODEL NUMBER | WORKING HEIGHT | PLATFORM MAX | PLATFORM MIN | PLATFORM W" x L" | W" x L"   | HEIGHT STOWED | WEIGHT |
|--------------|----------------|--------------|--------------|------------------|-----------|---------------|--------|
| BMVL-30      | 35'            | 30'          | 10"          | 24" x 27"        | 29" x 56" | 78"           | 950    |

### ADDITIONAL INFORMATION

- Outriggers included & attached
- Outrigger footprint= 64"x74"

### MOBILE VERTICAL LIFT:

This manually propelled lift is designed for one worker and provides access to 35' working heights. Ideal for work on overhead lighting and ceiling maintenance. 12 Volt DC Power with easy to use controls allows the BMVL-30 to raise and descend smoothly and quietly. Compact design for easy storage and doorway passage. Outriggers swing easily into place to provide excellent stability. For additional safety, outriggers include interlocks, which prevent the platform from being raised unless all four outriggers are in firm contact with the ground. The BMVL-30 also includes a tilt and roll design to allow the lift to be easily transported from one job site to another.



CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

# DRIVABLE VERTICAL MAST LIFT (DVML-18)

Introducing a Drivable Version of the Ballymore Push-able Vertical Lift

- **330 LBS. CAPACITY**
- 42" handrails for additional safety
- Easy operating controls
- Numerous Safety features including a Manual Lowering Valve, Emergency Stop Button, Automatic Pothole Protection
- Key Entry for controlled usage
- 2-12V Batteries that charge using a 110 volt outlet
- Fork Pockets for transportation



POWDER COATED TOUGH™

**IN STOCK**

- 18' Platform Height
- 24' Working Height
- Compact Footprint only 30" X 62"
- Standard Platform 24" wide X 25" long
- Cantilever Extension 21"
- Weight 2430 lbs.
- Durable Orange Powder Coat





Ballylift Model # BL-315



Cantilevered platform extends 34" beyond base frame



Rolls thru standard doorway

**FEATURES:**

- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
  - Standard platform with steel deck (BL-315)
  - Cantilevered platform w/aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Standard finish is deep gray
- Meets/exceeds ANSI safety standards

# BALLYLIFT SINGLE WORKER LIFTS

- **300 LB. CAPACITY**
- **Manually propelled maintenance lift providing working heights to 21' high**
- Easy to use hydraulic hand pump, or choose from available AC or DC power options, including:
  - Convenient plug in 120V AC
  - Independent 12V DC deep cycle system complete with battery and charger
  - Air hydraulic power requiring 90 CFM with 90 PSI pressure

| BALLYLIFT • MANUALLY PROPELLED ONE WORKER LIFTS |              |              |              |                 |                |             |                |
|---|--------------|--------------|--------------|-----------------|----------------|-------------|----------------|
|   | MODEL NUMBER | PLATFORM MAX | PLATFORM MIN | PLATFORM LENGTH | PLATFORM WIDTH | WEIGHT LBS. | WORKING HEIGHT |
| Standard  | BL-315       | 15'          | 6' 4"        | 20"             | 28"            | 590         | 21'            |
| Cantilevered                                    | BL-C14       | 14'          | 6' 4"        | 64"             | 20"            | 900         | 20'            |

| OPTIONAL ACCESSORIES |                            |
|----------------------|----------------------------|
| AC electric power    | Tool Tray                  |
| DC electric power    | Fluorescent tube holder    |
| Air-Hydraulic power  | Platform duplex receptacle |

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM


| MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS |                |                 |       |             |
|--|----------------|-----------------|-------|-------------|
| Model Number                               | Working Height | Platform Height |       | Weight Lbs. |
|  |                | Max             | Min   |             |
| MR-15-AC                                   | 21'            | 15'             | 6'4"  | 800         |
| MR-15-DC                                   | 21'            | 15'             | 6'4"  | 930         |
| MR-20-AC                                   | 25'            | 19'3"           | 6'4"  | 1,000       |
| MR-20-DC                                   | 25'            | 19'3"           | 6'4"  | 1,130       |
| MR-24-AC                                   | 30'            | 23'8"           | 6'7"  | 1,200       |
| MR-24-DC                                   | 30'            | 23'8"           | 6'7"  | 1,330       |
| MR-28-AC                                   | 34'            | 28'             | 6'10" | 1,420       |
| MR-28-DC                                   | 34'            | 28'             | 6'10" | 1,550       |

**FEATURES:**

- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform
- Accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails & gate 4" toeboards and non-slip dec.
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces



Rolls thru standard doorway

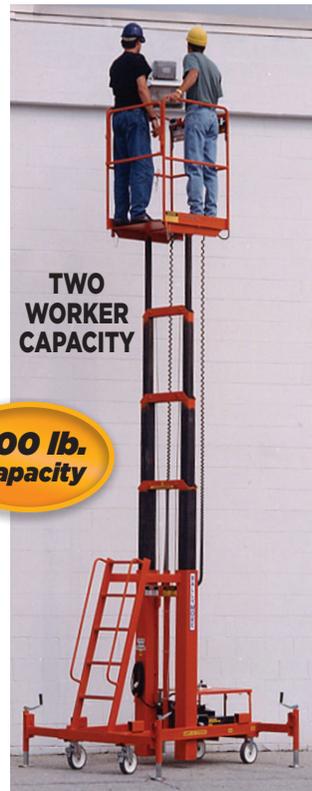

TWO WORKER CAPACITY

500 lb. Capacity

Shown with optional orange finish

# MR LIFTS TELESCOPING HYDRAULIC MAINTENANCE LIFTS

- **500 LB. COMBINED TWO PERSON CAPACITY**
- **Working heights to 34'**
- **Three power options:**
  - Convenient plug in 120V AC
  - Independent 12V DC deep cycle system with battery and charger
  - Air hydraulic power requiring 90 CFM with 90 PSI pressure
- Deep gray finish
- Meets ANSI safety standards

**OPTIONAL ACCESSORIES**

- Air-Hydraulic power
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle



## MANUALLY PROPELLED SINGLE PERSON MAINTENANCE LIFT

- **300 LB. CAPACITY**
- **Working heights to 16'**
- **No outriggers required**
- Fully enclosed 26" x 28" platform with 42" guardrails, midrails and gate
- Welded compact 32" x 63" base fits through doorways
- Rolls effortlessly on 2 locking swivel and two rigid 6" casters
- Two hands required to operate controls for user safety
- Standard deep gray finish
- Meets ANSI safety standards

### ELECTRICAL NOTES:

(on all lift products)  
Our standard electrical components are NEMA 1 or equivalent and are intended for indoor use in normal atmospheric conditions



300 lbs. Capacity

**Model OP-11** includes shelf that raises and lowers with platform

- 2 MODELS TO CHOOSE FROM:**
- Ground Entry (OP-10\*):** Raises to 9'6", includes two 24" x 24" shelves on base \*Shelf that raises and lowers with the platform not available
- 12V DC power source w/battery & charger for raising & lowering, (alt power sources available)

- One Step Entry (OP-11):** Raises to 10'6", contains two 18" x 24" shelves on base. Includes a 20" x 28" shelf that raises and lowers with the platform
- 80 to 100 raise and lower cycles between charges



**Model OP-10**  
Overall height in fully lowered position is 78"



| MAINTENANCE LIFT • SINGLE PERSON -MANUALLY PROPELLED |              |              |                |                 |                |             |
|--|--------------|--------------|----------------|-----------------|----------------|-------------|
| MODEL NUMBER   | PLATFORM MAX | PLATFORM MIN | WORKING HEIGHT | PLATFORM LENGTH | PLATFORM WIDTH | WEIGHT LBS. |
| OP-10  | 9' 6"        | 12"          | 15'            | 26"             | 28"            | 710         |
| OP-11  | 10' 6"       | 23"          | 16'            | 26"             | 28"            | 730         |

Ships at freight class 125.

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

## HEAVY DUTY ELEVATED WORK PLATFORMS

- **COMBINED 1,000 LBS. Four Person CAPACITY**

### STANDARD FEATURES:

- 120 volt AC power (raise and lower) with thermal overload protection

### OPTIONAL POWER:

- 12 volt DC deep cycle system available with battery and charger
- Air-Hydraulic Drive - recommended for hazardous environments

### NOTE OF CAUTION:

Unless special provisions are made, platforms and lifts must not be used for energized bare-wire electrical work or operated on inclined surfaces.

When this equipment is used, ground personnel should be excluded from the immediate work area.



SEE PAGE 21 FOR PUSH-ABLE & DRIVABLE LIFTS

- Emergency stops:
  - Located on platform for operator use
  - Emergency stop also located on base for use by ground personnel
  - Lockable to prevent unauthorized use
- Deep gray finish

### OPTIONS/ACCESSORIES:

- Cantilevered platform extensions
- 120 volt outlet on platform
- Special voltage electrical systems
- Safety orange powder coat finish

| MANUALLY PROPELLED HYDRAULIC SCISSOR LIFTS |                 |      |             |  |   |
|--|-----------------|------|-------------|--|---|
| WORKING HEIGHT                             | PLATFORM HEIGHT |      | STABILIZERS | SPECIFY MODEL #  | WEIGHT (lbs.)                             |
|  | MAX             | MIN. |             |  |   |
| 13'  | 7'4"            | 2'4" | NOT REQ'D   | HW1-7<br>HW1-10<br>HW2-13                              | 1,700<br>1,800<br>2,000                   |
| 16'  | 10'1"           | 5'   |             |  |   |
| 19'  | 12'10"          | 3'   |             |  |   |
| 21'  | 15'8"           | 5'8" | STD. EQUIP. | HW2-16*<br>HW3-19*<br>HW3-22**<br>HW4-24**<br>HW4-27** | 2,100<br>2,300<br>2,400<br>2,700<br>2,800 |
| 24'  | 18'8"           | 3'7" |             |  |   |
| 27'  | 21'4"           | 6'4" |             |  |   |
| 30'  | 24'4"           | 4'1" |             |  |   |
| 33'  | 27'             | 6'8" |             |  |   |

NOTE: All base dimensions are 9 by 4 ft. \*Add 20" to 4-ft base width for extended stabilizers \*\* Add 40" to 4-ft base width for extended stabilizers

- Manually propelled
- Totally enclosed platform with 42" guardrails, midrails, 4" toeboards and swing-in gate
- Large 3' x 8' platform w/serrated grating deck for secure footing
- Built-in ladder for platform access in fully lowered position
- 8" swivel casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability (optional on lower height models)
- Leveling jacks secure unit to floor, compensating for uneven surfaces (standard on floor models with raised deck heights above 15', optional on lower height models)
- Meets ANSI requirements
- For operator safety platform controls require both hands to change elevation

### Custom Designs

Available to meet your special access problems - call for quote

***In Stock For  
Immediate  
Availability***

# PALLET PRODUCTS



# PORTABLE LOADING DOCK





## BALLYPAL22AG63 STACKER

- Capacity= 2200 lbs.
- Lift Height Max. = 63"
- Lift Height Min. = 2 1/8"
- Fork Length= 42"
- Fork Width= 4"
- Base Legs (OD)= 46" to 58"
- Overall Length= 66 1/2"
- Overall Width= 46" to 58"
- Overall Height= 80"
- Single Mast
- Weight= 830 lbs.
- 1 Battery = 12V/150Ah

**NEW**

## BALLYPAL22AG138 STACKER

- Capacity= 2200 lbs.
- Lift Height Max. = 138"
- Lift Height Min. = 2 1/8"
- Fork Length= 42"
- Fork Width= 4"
- Base Legs (OD)= 46" to 58"
- Overall Length= 66 1/2"
- Overall Width= 46" to 58"
- Overall Height= 89 1/2"
- Duplex Mast
- Weight= 1120 lbs.
- 1 Battery = 12V/150Ah

**NEW**

Semi Electric Stacker with Adjustable Base Legs.  
Single Mast with a **Lift Height of 63"**

# 2200 lbs

### FEATURES

- Forks adjust from side to side to accommodate skid widths
- Adjustable forks lower to the minimum height 2 1/8"
- Overall fork width 8 1/4" to 28 1/2" (Adjustable)
- Straddle legs adjust to three positions
- Sturdy mast made of rolled U- shapes
- Powerful lift motor 2.1 HP
- Battery gauge and On/Off switch
- Integrated 150 Ah maintenance free battery provides more than enough power to handle heavy duty lifting
- Integrated charger facilitates easy and reliable charging



POWDER  
COATED  
**TOUGH™**

Semi Electric Stacker with Adjustable Base Legs.  
Duplex Mast with a **Lift Height of 138"**

# 2200 lbs

### FEATURES

- Forks adjust from side to side to accommodate skid widths
- Adjustable forks lower to the minimum height 2 1/8"
- Overall fork width 8 1/4" to 28 1/4" (Adjustable)
- Straddle legs adjust to three positions
- Sturdy mast made of rolled U- shapes
- Powerful lift motor 2.1 HP
- Battery gauge and On/Off switch
- Integrated 150 Ah maintenance free battery provides more than enough power to handle heavy duty lifting
- Integrated charger facilitates easy and reliable charging



POWDER  
COATED  
**TOUGH™**

| MODEL NUMBER    | WEIGHT CAPACITY | LIFT HEIGHT MAX | LIFT HEIGHT MIN | FORK LENGTH | FORK WIDTH | BASE LEGS (OD) | OVERALL LENGTH | OVERALL WIDTH | OVERALL HEIGHT | WEIGHT | POWER - BATTERIES |
|-----------------|-----------------|-----------------|-----------------|-------------|------------|----------------|----------------|---------------|----------------|--------|-------------------|
| BALLYPAL22AG63  | 2200            | 63"             | 2 1/8"          | 42"         | 4"         | 46" TO 58"     | 66 1/2"        | 46" TO 58"    | 80"            | 830    | 1 X 12V           |
| BALLYPAL22AG138 | 2200            | 138"            | 2 1/8"          | 42"         | 4"         | 46" TO 58"     | 66 1/2"        | 46" TO 58"    | 89 1/2"        | 1120   | 1 X 12V           |

# 2200 lbs

### FEATURES

- Mono mast for maximum visibility
- Built-in charger
- Battery discharge indicator with lift lock out for improved battery life
- 3 points design with centered drive for maximum stability and traction
- Two Powerful 12Volt batteries



### FEATURES

- Duplex mast
- Built-in charger
- Battery discharge indicator with lift lock out for improved battery life
- Adjustable straddle leg design for diverse pallet designs and improved stability
- 3 points design with centered drive for maximum stability and traction
- Two powerful 12Volt 85Ah batteries



## BALLYPAL22MSL63 ADJUSTABLE MONO MAST STACKER

- **Capacity= 2200 lbs.**
- Overall Fork Width 18" to 39 1/2" (Adjustable)
- Travel Speed = 2.3/2.5 mph
- Max Gradeability= 5% Laden and 10% Unladen
- Battery Voltage 2 x12V /85Ah

## BALLYPAL22LSL138 ADJUSTABLE DUPLEX MAST STACKER

- **Capacity= 2200 lbs.**
- Overall Fork Width 18" to 39 1/2" (Adjustable)
- Travel Speed = 2.3/2.5 mph
- Max Gradeability= 5% Laden and 10% Unladen
- Battery Voltage 2 x12V /85Ah

| MODEL NUMBER     | WEIGHT CAPACITY | LIFT HEIGHT MAX | FORK LENGTH | FORK WIDTH | LOWERED MAST HEIGHT | FREE LIFT HEIGHT | EXTENDED MAST HEIGHT | HEIGHT OF TILLER IN DRIVE | HEIGHT LOWERED | OVERALL LENGTH | OVERALL WIDTH | WEIGHT | POWER - BATTERIES |
|------------------|-----------------|-----------------|-------------|------------|---------------------|------------------|----------------------|---------------------------|----------------|----------------|---------------|--------|-------------------|
| BALLYPAL22MSL63  | 2200            | 63"             | 45"         | 4"         | 77"                 | 60"              | 97"                  | 49" MAX                   | 1.6"           | 71"            | 29"           | 1350   | 2 X 12V           |
| BALLYPAL22LSL138 | 2200            | 138"            | 45"         | 4"         | 88"                 | 135"             | 158"                 | 49" MAX                   | 1.6"           | 71"            | 29"           | 1655   | 2 X 12V           |
| BALLYPAL35TSL157 | 3500            | 157"            | 45"         | 4.7"       | 75"                 | 52"              | 176"                 | 56" MAX                   | 2"             | 82"            | 46" TO 58"    | 3263   | 24V               |

### Straddle Leg Walkie Electric Stacker

# 3500 lbs

### FEATURES

- Proportional lifting allows for efficient and safe lifting of any product at any lift speed.
- State of the art components
- Mesh protection for safety as well as great visibility during operation
- Robust chassis and thick apron protect the truck and its components
- Three stage mast



**Straddle Leg**  
Adjustable straddle leg design, suitable for diverse pallet sizes and more stability

## BALLYPAL35TSL157 ADJUSTABLE STACKERS

- **Capacity= 3500 lbs.**
- Overall Fork Width 19 1/2" to 38" (Adjustable)
- Travel Speed = 3.5/3.7 mph
- Max Gradeability= 6% Laden and 12% Unladen
- Battery Voltage 24V /2705Ah





## BALLYPAL33N PALLET TRUCK

- Capacity= 3300 lbs.
- Travel Speed = 2.85/2.98 mph
- Max Gradeability=5% Laden and 16% Unladen
- Battery Voltage 24V /20Ah Lithium



## BALLYPAL33X PALLET TRUCK

- Capacity= 3300 lbs.
- Travel Speed = 2.7/3 mph
- Max Gradeability= 3.5% Laden and 20% Unladen
- Battery Voltage 48V /20Ah



## BALLYPAL40L PALLET TRUCK

- Capacity= 4000 lbs.
- Travel Speed = 3.1/3.3 mph
- Max Gradeability=8% Laden and 12% Unladen
- Battery Voltage 24V /160Ah



## Newest Technology Lithium Battery Powered Pallet Truck - Electric Drive and Electric Lifting and Lowering

# 3300 lbs



**LITHIUM**  
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

### FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck

## Power Drive, Manual Lift and Lower Pallet Jack

# 3300 lbs

### FEATURES

- Compact design features a total weight of 364 lbs, leading to more uses and better productivity
- 3.5 hours of working time
- Easy battery exchange within seconds
- Includes operations buttons, battery indicator, as well as a key switch
- Powerful 500W AC Drive
- Can be used as a hand pallet truck

POWDER COATED TOUGH™



## Heavy Duty Long Tiller Electric Pallet Truck

# 4000 lbs

### FEATURES

- Long tiller design
- High performance maintenance free AC Drive Unit
- Equipped with AC Drive Unit
- Higher ground clearance
- Built in charger
- Special design fork tips with 3 entry rollers and 4 exit rollers
- Creep Button
- Large capacity battery 160Ah

POWDER COATED TOUGH™



| MODEL NUMBER | WEIGHT CAPACITY | LIFT HEIGHT | HEIGHT OF TILLER IN THE DRIVE POSITION | HEIGHT LOWERED | FORK LENGTH | FORK WIDTH | OVERALL LENGTH | OVERALL WIDTH | WEIGHT | POWER - BATTERIES |
|--------------|-----------------|-------------|--|----------------|-------------|------------|----------------|---------------|--------|-------------------|
| BALLYPAL33N  | 3300            | 4.5"        | 46" MAX                                | 3"             | 45"         | 6.3"       | 60"            | 27"           | 278    | 24V               |
| BALLYPAL33X  | 3300            | 4.5"        | 50" MAX                                | 3"             | 48"         | 6.3"       | 68"            | 27"           | 364    | 48V               |
| BALLYPAL40L  | 4000            | 4.7"        | 48" MAX                                | 3"             | 48"         | 6.3"       | 68"            | 29"           | 913    | 24V               |

# PORTABLE LOADING DOCK

POWDER  
COATED  
**TOUGH™**

- **CAPACITY 1,500 LBS.**
- Platform Height- Ground Level to 55" high
- Platform Dimensions - 47" X 75"
- Weight - 2,178 lbs.
- Color - Safety Orange and Yellow
- Overall Base - 68" wide by 105" long
- Overall Height (fully lowered) - 44"
- Overall Height (fully raised) - 98"
- Pendant Controls for Raising and Lowering
- Two 12V Batteries
- 24V Drive Motor

## FEATURES AND BENEFITS

- Powered in forward, reverse, raise and lower directions
- All in one Control Handle for steering, movement forward and reverse, and platform raising and lowering
- Heavy Duty Capacity - 1,500 lbs.
- Large Platform designed to address a wide variety of products
- Key Control Operation
- Fold Down Rails
- Safety Features including Emergency Stop Button
- Convenient 110 volt charging
- Extendable Side Rails
- Battery Power Indicator
- Built in Cycle Counter

**NEW**




**Easily load or unload heavy objects to dock levels or pickup truck bed heights!**

# HEAVY DUTY INDUSTRIAL CROSSOVERS


- Three Piece Construction: two stair sections & one bridge
- Heavy 1 1/4" schedule 40 pipe structural frame & rails
- Standard tread: expanded metal or serrated grating  
(Optional solid steel tread with abrasive mat on bridge available to avoid debris falling onto conveyors)
- Full rails, midrails and toeboards

- Stairway slope allows easier climbing and descent
- Gray powder coat finish
- Each stair section has four legs with large, pre-drilled plates to bolt to the floor
- Available in alternate configurations:  
U-Shape, Z-Shape, L-Shape, etc. ( see below )

**Extra Heavy Duty  
800 lb.  
Capacity**

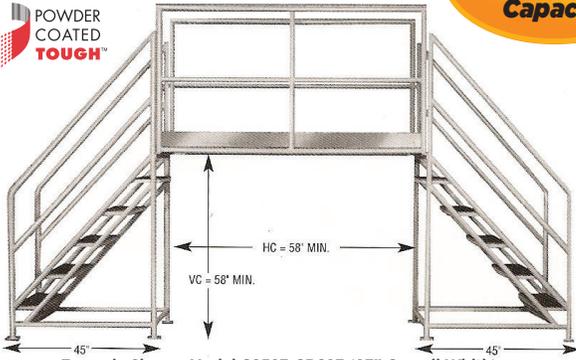

Example Shown: Model CS527-CB627 (27" Overall Width)

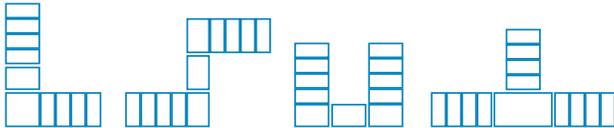

Alternate configurations available. Call for details.

## STAIR SECTIONS (Set of 2) FOR INDUSTRIAL CROSSOVERS

2 to 7 Steps... with choice of widths

| # of Steps each Section | Vertical Clearance Inches | 27" Overall Width (Expanded Metal) |        | 31 1/2" Overall Width (Serrated Grating) |        | 38 1/2" Overall Width (Serrated Grating) |        |
|-------------------------|---------------------------|------------------------------------|--------|--|--------|--|--------|
|                         |                           | MODEL #                            | WEIGHT | MODEL #                                  | WEIGHT | MODEL #                                  | WEIGHT |
| 2                       | 28                        | CS227                              | 253    | CS231                                    | 254    | CS238                                    | 276    |
| 3                       | 38                        | CS327                              | 310    | CS331                                    | 325    | CS338                                    | 351    |
| 4                       | 48                        | CS427                              | 378    | CS431                                    | 393    | CS438                                    | 428    |
| 5                       | 58                        | CS527                              | 445    | CS531                                    | 465    | CS538                                    | 505    |
| 6                       | 68                        | CS627                              | 517    | CS631                                    | 537    | CS638                                    | 583    |
| 7                       | 78                        | CS727                              | 600    | CS731                                    | 630    | CS738                                    | 680    |

## BRIDGE SECTIONS FOR INDUSTRIAL CROSSOVERS

Combine any length with appropriate width stair sections

| Length in Inches | Horizontal Clearance Inches | 27" Overall Width (Expanded Metal) |        | 31 1/2" Overall Width (Serrated Grating) |        | 38 1/2" Overall Width (Serrated Grating) |        |
|------------------|-----------------------------|------------------------------------|--------|--|--------|--|--------|
|                  |                             | MODEL #                            | WEIGHT | MODEL #                                  | WEIGHT | MODEL #                                  | WEIGHT |
| 20               | 18                          | -CB227                             | 88     | -CB231                                   | 95     | -CB238                                   | 102    |
| 30               | 28                          | -CB327                             | 111    | -CB331                                   | 120    | -CB338                                   | 128    |
| 40               | 38                          | -CB427                             | 133    | -CB431                                   | 140    | -CB438                                   | 153    |
| 50               | 48                          | -CB527                             | 156    | -CB531                                   | 165    | -CB538                                   | 180    |
| 60               | 58                          | -CB627                             | 195    | -CB631                                   | 203    | -CB638                                   | 220    |

NOTE: For complete model designation use model # prefix for pair of stair sections from "Stair Sections" table, plus model # suffix from "Bridge Sections" table. (i.e., CS327-CB227).

# MERCHANDISE LADDER CART

- **1000 LB. CAPACITY**
- Base Dimensions= 21" x 51"
- Overall Height= 63"
- Steps= 3 with Abrasive Mat
- Top Shelf Height= 28"
- Top Shelf Dimensions= 20" Wide by 40" Long
- Bottom Shelf Dimensions= 20" Wide by 45" Long
- Casters= 4 - 2 swivels and 2 rigid
- Weight = 108 lbs.



Ballymore introduces the heavy duty merchandise ladder cart with a capacity of 1,000 lbs. The cart has two large shelves for transporting a variety of merchandise. Ladder portion has a spring loaded device which secures the ladder to the floor when climbing and retracts for easy maneuvering. Cart is equipped with 4 casters- 2 swivels and 2 rigid for effortless turning and moving. Durable powder coated gray with yellow steps.



# PAINT CARTS

- Features:**
- **400 LB. CAPACITY**
  - Base = 20" Wide X 27" Long
  - Shelf - 20" Wide X 20" Long
  - Overall Height 42"
  - Four Heavy Duty Casters (2 swivel, 2 rigid)
  - Weight = 62 lbs.
  - Ships Assembled
  - Colors Available In Orange or Blue

It's here! Ballymore's latest product - a perfectly designed patent pending Heavy Duty Paint Cart. The new paint cart makes transporting a 5 gallon container quicker and less stressful on the back and shoulders.



## Need a custom ladder, lift or platform? We will engineer & fabricate to meet your requirements.

Need a custom vertical access solution? Let us work with you step-by-step on your custom application. We'll engineer and fabricate a custom ladder, lift or platform to meet your specific requirements in a quick and timely manner. Make your custom application a reality! Call Ballymore today: **800-762-8327**



**CUSTOM ENGINEERED WORK PLATFORMS**

## CUSTOM VERTICAL ACCESS SOLUTIONS

Ballymore's custom design & fabrication capabilities can meet requirements for projects of all sizes and all types.

### CUSTOM LIFTS, PLATFORMS & LADDERS



**CALL FOR CUSTOM SOLUTIONS: (800) 762-8327**

**Product Specifications are subject to change without notice.** Please confirm critical product specifications at the time of ordering.

**Ship Prepaid and Add to take advantage of freight cost reductions with our carrier.**

#### Ladder Inspection Procedure

Shipments are made FOB factory. Each product has been inspected before shipment. Consignee is responsible to inspect material at time of delivery, and should refuse shipment or make written notice to carrier upon receipt of damaged materials.

**Carriers and Ballymore will not accept claims if damage is not noted at the time of delivery.**

**Freight:** Ballymore can provide estimated freight cost based on our preferred carriers. Note: Costs are subject to change depending on fuel surcharges, special delivery requirements, etc. Ballymore will not be responsible for differences in freight estimates and actual freight costs.

**On collect or 3rd party billing shipments, any freight claims must be handled by the customer, including refused shipments.**

#### WARRANTY (All products including lifts)

Company warrants these products to be free from defects in material and workmanship for a period of one year from date of original purchase. Component parts carry individual warranties as provided by the manufacturer. Our warranty does not extend to parts or end products subjected to misuse, neglect, damage in shipment, by accident or failure to comply with operating instructions. We will repair or replace any unit which is defective during the warranty period if that unit is returned to our factory properly packaged with transportation charges paid. Claims for unauthorized field labor or time charges will not be accepted. Company will not be responsible for any consequential damages of any nature.

**RETURN POLICY:** Written factory permission must be received prior to return. Returns must be in good condition and made within 30 days of original shipment. Freight prepaid. Restocking charge of 20 - 25% on standard items, 50% on aluminum and stainless.

#### NON-REFUNDABLE ITEMS:

Custom or modified ladders, work platforms, crossovers, modified or custom lifts are non-refundable.

**Minimum Order:** \$15.00, Prepay and add shipments are subject to \$5.00 service charge.

## POLICIES WARRANTY SHIPPING & RETURNS INFORMATION

## STEP UP TO BALLYMORE

### PALLET TRUCKS AND STACKERS

Ballymore powered pallet trucks and stackers are designed for maximum quality, durability, and ease of use. A variety of models are available for quick delivery.

### PORTABLE LOADING DOCK

The Portable Loading Dock is ideal for loading or unloading heavy objects to dock levels or pickup truck bed heights.



# ELEVATION THROUGH INNOVATION

### PATENTED BOXED LADDER SYSTEM

Innovative, patented bolt-in top step design is engineered to allow ladders to ship boxed, reducing freight costs, minimizing risk of freight damage and increasing stocking efficiency.

### PATENTED WEIGHT ACTUATED LOCKSTEP

The safest, most durable Lockstep on the market today. Patented design securely locks the ladder to the floor when just 70 lbs. is applied to any of the steps, providing increased safety.



## MORE PRODUCTS = MORE SOLUTIONS

- **MORE** Component Ladder options to extend the life and utility of your ladders
- **MORE** Custom Engineered Ladder, Lift & Work Platform Innovations
  - **MORE** Safety Designed Products and Options
  - **MORE** Patented Vertical Access Solutions



# BALLYMORE

ROLLING SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS • CARTS

231 W Stewart Huston Drive  
Coatesville, PA 19320

501 Gunnard Carlson Drive  
Coatesville, PA 19320



610.593.5062 • 800.762.8327 • WWW.BALLYMORE.COM