



Ballymore Safety Products & Tri-Arc Ladder have become one.

Our team & catalogs are now combined, offering even more safety products this year.



ELEVATION INNOVATION AND SERVICE

SINCE 1945

when Ballymore began manufacturing rolling safety ladders we've been committed to quality construction, innovative product development and customer service.

*Celebrating
Over 75
Years*

TODAY

we build upon our 75 year history of growth with the addition of our third state of the art manufacturing facility and Inventory/Parts Center in Coatesville, Pennsylvania, plus our Tri-Arc Ladder facility in Pittsburgh, PA.

FUTURE

Plans are in place to proactively help with workplace safety issues. The Ergovaluator (pg. 74) will analyze the safety issue and Ballymore will propose safety solutions.



Coatesville, PA
Manufacturing & Custom
Product Development Facility



Coatesville, PA
Lifts
Product Development Facility



Coatesville, PA
Component Parts
Product Development Facility



Pittsburgh, PA
Ladder Division
Product Development Facility



MORE PATENTED VERTICAL ACCESS INNOVATIONS

• Weight Actuated Lockstep

The safest, most durable Lockstep on the market today. Allows ladder to lock to the floor when 70 lbs. is applied to any of the steps. Prevents workers from hopping over the bottom step and rolling the ladder while they are on it, or have co-workers push them around. The preferred lockstep of many Loss Prevention professionals.

• Boxed Ladders & Platforms

Patented ladder & work platform designs ship, stack & store in a box.

- Minimizes Risk of Freight Damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

• Power Stocker Lift

Patented manually propelled and driveable hydraulic order picker with optional sensing system that creates a safety zone around the lift alerting the operator of activity below the lift

• Pallet Products

Thirteen of the most popular pallet stackers and trucks on the market.

See our new Self-Lifting Stacker

REPLACEABLE COMPONENTS

Extend ladder life with replaceable locksteps, handrails, base frames & rear verticals. Most parts ship by UPS so your ladders can be back in service quickly.

HEAVY DUTY CONSTRUCTION AND BETTER COMPONENTS

• Deeper Top Steps

All ladders 5 steps and above feature a 14" Deep Top Step, compared to competitor's 10" deep top step.

• High Quality Casters

Ballymore ladders roll on the best casters in the industry, featuring poly tread, ball bearings, and dust covers

• Dual Lockstep Pedals

Our standard lockstep has two release pedals for increased convenience. Some competitor's offer a single pedal only.

• Heavy Duty Construction

The base frame and rear verticals of our Monster Line, Heavy Duty Slope Ladder series, Cantilever Ladders and Work Platforms are designed with heavy duty 2" x 1" rectangular tubing.



BALLYMORE SAFETY

LOOK FOR THE BLUE AND ORANGE TABS ON THE SIDE OF EACH PAGE FOR EASY SELECTION OF BALLYMORE PRODUCTS AND TRI-ARC PRODUCTS

TRI-ARC LADDER DIVISION

TABLE OF CONTENTS

How to Select the Right Ladder 4

Steel Rolling Ladder 5

Mobile Step Stool 5

M-2000 Rolling Ladder..... 6

Steel Rolling Safety Ladder 7

All Direction Ladder 8-9

50° Safety Angle Rolling Ladder..... 10

50° Safety Angle HD Rolling Ladder 11

Weight Actuated Ladder 13

Weight Actuated All Direction Ladder..... 14

Weight Actuated 50° Ladder 15

Monster Line Ladder..... 16

600# Heavy Duty Ladder 17

Navigator Ladder 18

All Direction 50° Ladder 19

Stock Picking Ladder 20

Lock N Stock Ladder 21

Mobile Foldaway Step Ladder 21

Tilt N Roll Ladder 22

Fold N Store Ladder 23

All Terrain Rolling Ladder 23

Gateway Rear Exit Ladder..... 24

Fixed Steel Ladder 25

Single Entry Work Platform 26

Mobile Steel Work Platform..... 27

Double Entry Work Platform..... 28

Truck/Dock Access Ladder 29

Industrial Access Stairway Ladder..... 29

Adj Height Work Platform 30

Refrigerator Truck Platform..... 31

Step Stool..... 31

Stainless Steel Ladders..... 32

Safety Gates..... 33

Aluminum Ladders..... 34-37

Crossovers..... 38

Cantilever Ladders..... 39

Versastep Platform 40

U-Design Customizable Ladder.... 40-41

U-Design Crossovers 42

U-Design Cantilever Ladders 43

U-Design Multi-Platform Access System . 44-45

U-Design Rooftop Platforms..... 46-47

Configurator 48

Adjustable Height Mobile Ladder..... 49

Tank Top Adj. Height Platform..... 50

Paint Carts & Merchandise Cart..... 51

Thin Line Ladder 51

Power Stocker Lifts 53-54

Mini Scissor Lifts & Merchandise Lift 55

Drivable Scissor Lifts 56

Vertical Mast Lifts..... 57-58

Rebel-10 59

Ballylift & MR Lift 60

Fork Deck & Portable Loading Dock..... 61

Ballypal Pallet Stacker 63-65

Ballypal SLS-54..... 66

Ballypal Pallet Trucks..... 67-68

Ball Transfer Table 69

Conveyor Table 69

Ballymore Custom Work Platforms 70-71

Tri-Arc Custom Work Platforms..... 72-73


Ergovaluator Safety 74

Policies and Warranties 75



SELECTING THE RIGHT ROLLING LADDER

What to consider when selecting the proper ladder for your application.

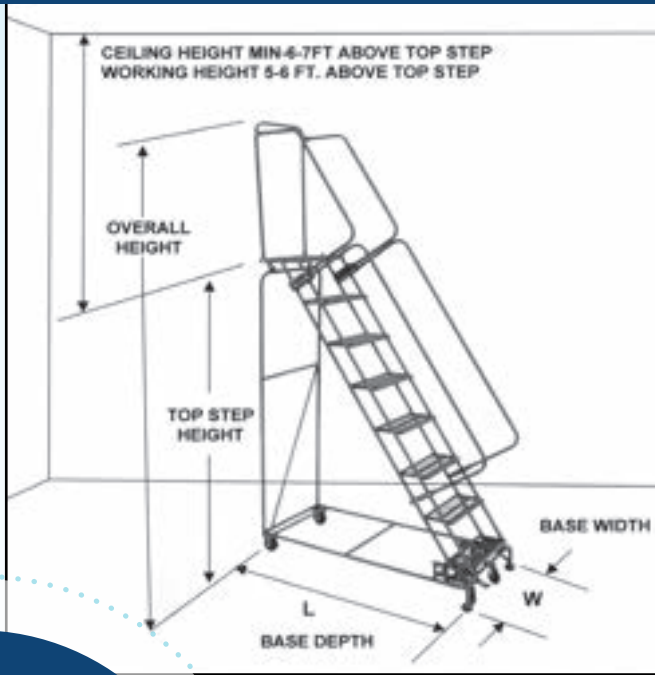

Size Considerations

- Select Platform Height, also known as Top Step Height, based on operations to be performed.
- Platform Height is where the user generally stands. Make sure you have minimum clearance of 6 to 7 feet from the ceiling or any object suspended from the ceiling to insure the user has room to stand safely.
- Maintain maximum working height of 5 feet to 6 feet above the platform height.
- For larger ladders, choose a wide ladder over a narrow one if space permits. For bulky loads, consider a stairway slope ladder and/or deeper top step.

MORE SAVINGS

BALLYMORE'S PATENTED LADDER IN A BOX

- LOWERS SHIPPING COSTS
- MINIMIZES THE RISK OF FREIGHT DAMAGE
- BOXES STACK EASILY
allowing cost effective stocking of ladders



Patent No.:
US 7,828,115 B2



Weight Actuated Lockstep Ladder



Standard Lockstep Ladder



Spring Loaded Caster Ladder

Locking Mechanisms

- **Weight Actuated Lock Step:** This Patented state of the art lock step automatically actuates when 70 lbs. of weight is applied to the stair section. It is the safest and most durable lock step on the market today.
- **Standard Lock Step Ladder:** Ideal for applications 5 steps and above. These ladders are raised into the rolling position when the lock step is actuated. Releasing the lock step drops the ladder into the climbing position with the feet firmly on the floor.
- **Spring-loaded Casters:** Ideal for shorter ladders with 5 steps or less. On this style ladder, the wheels retract under the user's weight securing the ladder safely to the floor.

Climbing Position

The rolling ladder is designed for the worker to face the steps when climbing or descending.

"Stairway Slope" ladders offer a more gradual 50 degree slope, which may be preferable when carrying heavy or bulky items up or down a ladder.

Material Type

- **Steel:** For all around general purpose.
- **Stainless:** For corrosive environment as well as outdoor use.
- **Aluminum:** Like Stainless they are corrosion resistant but approximately 1/3 the weight of steel or stainless.

TREAD SELECTION GUIDE



Abrasive Mat Tread (R):
Provides non-slip footing for safe climbing. Perfect for clean retail or office environments.



Perforated Tread (P):
Excellent slip resistance. Used extensively in retail and storeroom applications.



Expanded Metal Tread (X):
This aggressive self-cleaning tread is ideal for the warehouse or retail floor & allows debris to fall through the tread



Serrated Tread (G):
This most aggressive tread is ideal for the shop floor or any industrial application where maximum slip resistance is required.



STANDARD ROLLING LADDERS WITH SPRING LOADED CASTERS

- 450 lb. capacity • Working heights up to 12'
- Spring loaded swivel casters retract under user's weight
- 7" deep steps with 10" deep top step on 1 - 4 step models shown with (*) in the chart below
- 14" deep top step on 4 - 7 step FSH models
- **Specify tread type when ordering**
- 1 - 4 step ladders (*) ship unassembled in a box, and are eligible for UPS shipping
- 4 - 7 step FSH models ship unassembled
- Specify set-up (SU) if required***
- Available in all welded construction
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available



BALLYMORE SAFETY



FSH526X

STEPS INCLUDING TOP STEP	HEIGHT INCHES		16" WIDE STEP			24" WIDE STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
NO HANDRAILS								
1 STEP	12	12	118*	18 x 16	18	126*	26 x 16	20
2 STEP	19	19	218*	20 x 19	22	226*	30 x 19	28
3 STEP	28.5	28.5	318*	20 x 25	31	326*	30 x 25	36
4 STEP	38	38	418*	20 x 31	42	426*	30 x 31	51
WITH HANDRAILS								
2 STEP	19	49	*H218*	20 x 19	36	*H226*	30 x 19	42
3 STEP	28.5	58.5	*H318*	20 x 25	45	*H326*	30 x 25	50
4 STEP	38	68	*H418*	20 x 31	56	*H426*	30 x 31	65
4 STEP	40	73	FSH418	20 x 35	68	FSH426	30 x 35	80
5 STEP	50	83	FSH518	20 x 42	75	FSH526	30 x 42	87
6 STEP	60	93	FSH618	24 x 49	83	FSH626	30 x 49	98
7 STEP	70	103	FSH718	24 x 56	89	FSH726	30 x 56	108

*Eligible for UPS * Handrails may ship in separate box



Number Of Steps	Top Step Depth	Top Step Height	Bottom W x D	MODEL #
Aluminum				
2	14"	20"	20" x 23"	WLAR002166
2	14"	20"	29" x 23"	WLAR002246
3	14"	30"	22" x 31"	WLAR003166
3	14"	30"	29" x 31"	WLAR003246
2	21"	20"	20" x 30"	WLAR002166-D4
2	21"	20"	29" x 30"	WLAR002246-D4
2	21"	20"	29" x 30"	WLAR002246-D4
2	28"	20"	20" x 37"	WLAR002166-D5
2	28"	20"	29" x 37"	WLAR002246-D5
Steel				
3	30"	10"	30" x 28"	WLSR003246

MOBILE STEP STOOLS

- **450 rated capacity - Steel**
- Anti-Slip, Perforated or Grip Strut - Steel
- Powder-coated gray finish - Steel
- **350 rated capacity - Aluminum**
- Solid Ribbed, Perforated or Grip Strut Aluminum
- Standard mill finish - Aluminum
- Complies with applicable OSHA & ANSI standards



NOTE: Models Shown are for Perforated Treads
Specify Tread Type when ordering

TRI-ARC LADDER DIVISION



**POWDER
COATED
TOUGH™**

**14" DEEP
TOP STEP**




**Ballymore's
Component Design
with Replaceable
Parts!**

**EXTEND LADDER LIFE AND
UTILITY. LOCKSTEPS, HAND-
RAILS, BASE FRAMES AND REAR
VERTICALS CAN BE REPLACED.**

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP WITH 24" WIDE BASE					
5 STEP	50"	83"	052414	24 x 43	91
6 STEP	60"	93"	062414	24 x 49	100
7 STEP	70"	103"	072414	24 x 55	109
8 STEP	80"	113"	082414	24 x 61	127
24" WIDE STEP WITH 32" - 40" WIDE BASE					
5 STEP	50"	83"	053214	32 x 43	110
6 STEP	60"	93"	063214	32 x 49	122
7 STEP	70"	103"	073214	32 x 55	143
8 STEP	80"	113"	083214	32 x 61	160
9 STEP	90"	123"	093214	32 x 68	175
10 STEP	100"	133"	103214	32 x 74	193
11 STEP	110"	143"	113214	32 x 80	205
12 STEP	120"	153"	123214	32 x 87	220
13 STEP*	130"	175"	134014	40 x 94	250
14 STEP*	140"	185"	144014	40 x 100	280
15 STEP*	150"	195"	154014	40 x 106	310

*Must be skidded.

**Specify
Tread
Type
when
ordering**

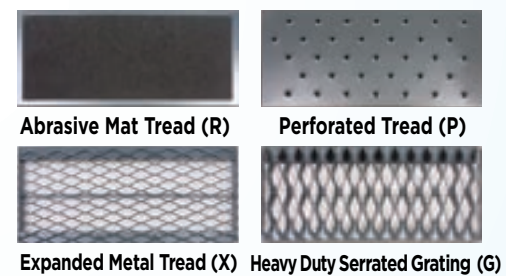

M-2000 SERIES ROLLING SAFETY LADDERS

- **450 LB. CAPACITY**
- Easy to use foot-pedal activated lockstep
- High quality casters with bearing and dust cover
- 14" deep top step
- Ships unassembled for freight savings
- Available fully assembled, specify (SU) set-up
- Specify tread type when ordering
- Rigid 1" OD tubing
- 30" high handrails
- 21" & 28" deep top step available (see below)
- Available with rear guard rail removed for walk through
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available

BALLYMORE SAFETY

M-2000 SERIES DEEP TOP STEP LADDERS

- **450 LB. CAPACITY**
- All features of the standard M-2000 line with a 21" or 28" Deep Top Step to provide a larger and more comfortable work space
- Available with rear guard rail removed for walk through
- Side exit available on 28" deep top step models

**POWDER
COATED
TOUGH™**

**21" or 28"
DEEP TOP
STEP**



**Features choice of
21" or 28" deep top step**

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		21" DEEP TOP STEP			28" DEEP TOP STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP								
24" WIDE BASE								
5 STEP	50	83	052421	24 x 50	102	052428	24 x 57	113
6 STEP	60	93	062421	24 x 56	111	062428	24 x 63	122
7 STEP	70	103	072421	24 x 62	120	072428	24 x 69	131
8 STEP	80	113	082421	24 x 68	138	082428	24 x 75	149
24" WIDE STEP								
32" - 40" W BASE								
5 STEP	50	83	053221	32 x 50	121	053228	32 x 57	132
6 STEP	60	93	063221	32 x 56	133	063228	32 x 63	144
7 STEP	70	103	073221	32 x 62	154	073228	32 x 69	165
8 STEP	80	113	083221	32 x 68	171	083228	32 x 75	182
9 STEP	90	123	093221	32 x 75	186	093228	32 x 82	197
10 STEP	100	133	103221	32 x 81	204	103228	32 x 88	215
11 STEP	110	143	113221	32 x 87	216	113228	32 x 94	227
12 STEP	120	153	123221	32 x 94	231	123228	32 x 101	242
13 STEP*	130	175	134021	40 x 101	261	134028	40 x 108	272
14 STEP*	140	185	144021	40 x 107	291	144028	40 x 115	302
15 STEP*	150	195	154021	40 x 113	321	154028	40 x 120	332

*Must be skidded.



TRI-ARC TREAD SELECTION GUIDE



Perforated Tread (6):
Perforated hole pattern and solid step provides excellent slip-resistance, self-cleaning and durability



Grip Strut (2):
Grip Strut provides the most aggressive slip-resistance and self-cleaning properties.

STEEL ROLLING SAFETY LADDERS

- 450 LB. CAPACITY
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coat gray finish
- Spring-loaded casters 2-5 step models
 - Step lock 6-16 step models
 - Complies with applicable OSHA & ANSI standards



MODEL #	# of Steps	Platform Height	Overall Height	Platform W x L	Base W x D	Weight
16" Step Width						
KDSR102166	2	20"	62"	16" x 10"	21" x 21"	77
KDSR103166	3	30"	72"	16" x 10"	24" x 28"	89
KDSR104166	4	40"	82"	16" x 10"	24" x 35"	100
KDSR105166	5	50"	86"	16" x 10"	24" x 42"	110
KDSR106166	6	60"	102"	16" x 10"	27" x 50"	159
KDSR107166	7	70"	112"	16" x 10"	27" x 57"	155
24" Step Width						
KDSR102246	2	20"	62"	24" x 10"	28" x 21"	85
KDSR103246	3	30"	72"	24" x 10"	30" x 28"	96
KDSR104246	4	40"	82"	24" x 10"	30" x 35"	109
KDSR105246	5	50"	86"	24" x 10"	30" x 42"	121
KDSR106246	6	60"	102"	24" x 10"	35" x 50"	176
KDSR107246	7	70"	112"	24" x 10"	35" x 57"	188
KDSR108246	8	80"	122"	24" x 10"	35" x 64"	245
KDSR109246	9	90"	132"	24" x 10"	35" x 69"	256
KDSR110246	10	100"	142"	24" x 10"	35" x 76"	281
KDSR111246	11	110"	152"	24" x 10"	35" x 83"	296
KDSR112246	12	120"	162"	24" x 10"	35" x 90"	323
KDSR113246	13	130"	172"	24" x 10"	40" x 96"	341
KDSR114246	14	140"	182"	24" x 10"	40" x 103"	363
KDSR115246	15	150"	192"	24" x 10"	40" x 110"	383

NOTE: Models Shown are for Perforated Treads
Specify Tread Type when ordering

STEEL DEEP TOP STEP LADDERS

- 20" or 30" deep top platform
- 450 lb. rated capacity
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coat gray finish
- Spring-loaded casters 2-4 step models
 - 7" deep steps
 - Complies with OSHA & ANSI standards



# of Steps	Platform Height	Overall Height	20" DEEP TOP STEP				30" DEEP TOP STEP			
			MODEL #	Platform W x L	Base W x D	Wgt lbs	MODEL #	Platform W x L	Base W x D	Wgt lbs
16" Step Width										
2	20"	62	KDSR102166-D2	16" x 20"	21" x 31"	73	KDSR102166-D3	16" x 30"	21" x 41"	77
3	30"	72	KDSR103166-D2	16" x 20"	24" x 38"	93	KDSR103166-D3	16" x 30"	24" x 48"	97
4	40"	82	KDSR104166-D2	16" x 20"	24" x 45"	104	KDSR104166-D3	16" x 30"	24" x 55"	108
5	50"	92	KDSR105166-D2	16" x 20"	24" x 52"	122	KDSR105166-D3	16" x 30"	24" x 62"	134
6	60"	102	KDSR106166-D2	16" x 20"	27" x 60"	160	KDSR106166-D3	16" x 30"	27" x 70"	180
7	70"	112	KDSR107166-D2	16" x 20"	27" x 67"	180	KDSR107166-D3	16" x 30"	27" x 77"	190
24" Step Width										
2	20"	62	KDSR102246-D2	24" x 20"	28" x 31"	91	KDSR102246-D3	24" x 30"	28" x 41"	97
3	30"	72	KDSR103246-D2	24" x 20"	30" x 38"	102	KDSR103246-D3	24" x 30"	30" x 48"	108
4	40"	82	KDSR104246-D2	24" x 20"	30" x 45"	149	KDSR104246-D3	24" x 30"	30" x 55"	115
5	50"	92	KDSR105246-D2	24" x 20"	30" x 52"	125	KDSR105246-D3	24" x 30"	30" x 62"	149
6	60"	102	KDSR106246-D2	24" x 20"	35" x 60"	176	KDSR106246-D3	24" x 30"	35" x 70"	186
7	70"	112	KDSR107246-D2	24" x 20"	35" x 67"	214	KDSR107246-D3	24" x 30"	35" x 77"	224
8	80"	122	KDSR108246-D2	24" x 20"	35" x 74"	227	KDSR108246-D3	24" x 30"	35" x 84"	258
9	90"	132	KDSR109246-D2	24" x 20"	35" x 79"	277	KDSR109246-D3	24" x 30"	35" x 89"	308
10	100"	142	KDSR110246-D2	24" x 20"	35" x 86"	308	KDSR110246-D3	24" x 30"	35" x 96"	328
11	110"	152	KDSR111246-D2	24" x 20"	35" x 93"	322	KDSR111246-D3	24" x 30"	35" x 103"	338
12	120"	162	KDSR112246-D2	24" x 20"	35" x 100"	348	KDSR112246-D3	24" x 30"	35" x 100"	358
13	130"	172	KDSR113246-D2	24" x 20"	40" x 106"	370	KDSR113246-D3	24" x 30"	40" x 116"	380
14	140"	182	KDSR114246-D2	24" x 20"	40" x 113"	395	KDSR114246-D3	24" x 30"	40" x 123"	405
15	150"	192	KDSR115246-D2	24" x 20"	40" x 120"	416	KDSR115246-D3	24" x 30"	40" x 130"	436

NOTE: Models Shown are for Perforated Treads
Specify Tread Type when ordering




MOVES Laterally TO FIT IN TIGHT CORNERS AND CLOSE TO SHELVES

ALL DIRECTION ROLLING LADDERS

- 450 LB. CAPACITY
- Turns in its own radius
- 14" deep top step
- Easy to use foot-pedal activated lockstep
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available
- SHIPS KD to reduce freight costs
- Available assembled, specify (SU) set-up
- Specify tread type when ordering
- (X) Expanded Metal Standard
- (P) Perforated
- (R) Abrasive Mat
- (G) Heavy Duty Serrated Grating

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
6 STEP	60	93	PIP-6	24 x 49	110
7 STEP	70	103	PIP-7	24 x 55	125
8 STEP	80	113	PIP-8	24 x 61	140
24" WIDE STEP					
6 STEP	60	93	PIP-6-32	32 x 49	133
7 STEP	70	103	PIP-7-32	32 x 55	154
8 STEP	80	113	PIP-8-32	32 x 61	171
9 STEP	90	123	PIP-9	32 x 68	186
10 STEP	100	133	PIP-10	32 x 74	204
11 STEP	110	143	PIP-11	32 x 80	216
12 STEP	120	153	PIP-12	32 x 87	231

14" DEEP TOP STEP

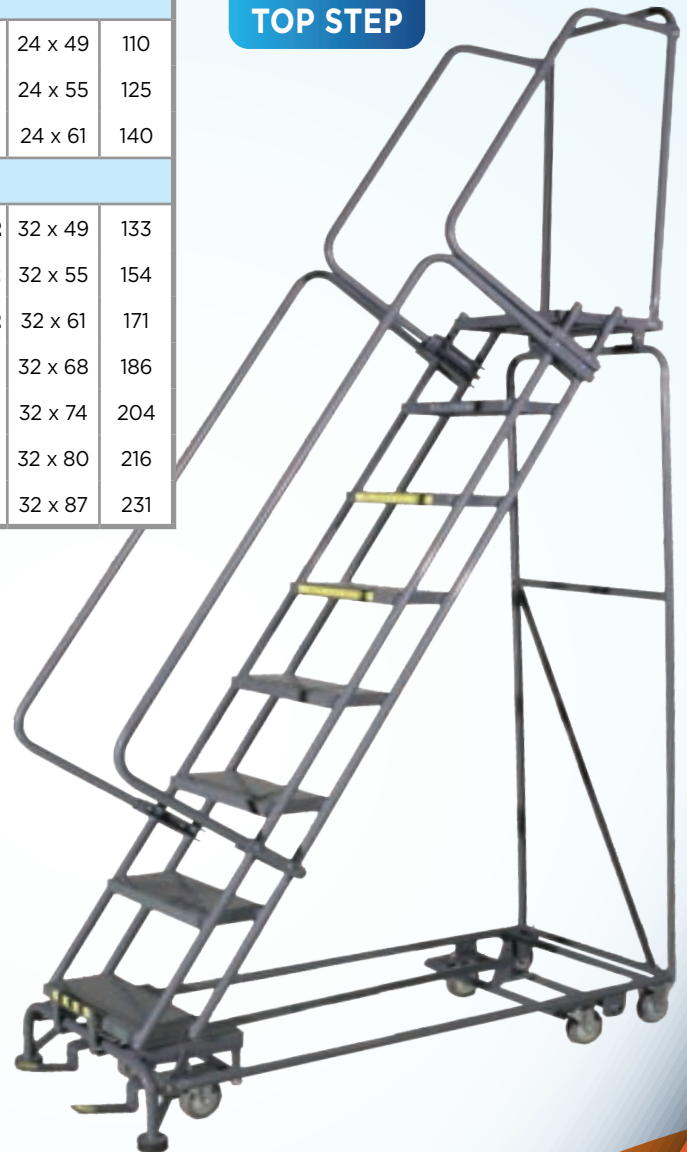


Designed for Easy & Fast Assembly

SHIPS KD IN A BOX:

- Minimizes risk of freight damage
- Lowers shipping costs
- Boxes stack easily allowing cost effective stocking of ladders

Ballymore's Patented Bolt-in Top Step Ladders Ship Boxed!

All-Directional System

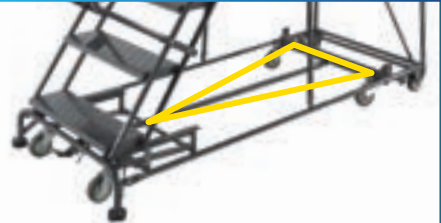

Rolls on 4 swivel casters allowing ladders to move in **ALL DIRECTIONS** - even laterally! Rigid rear casters easily transition between floor types.

BALLYMORE SAFETY



IDEAL FOR EASE OF MANEUVERING IN TIGHT SPACES OR NARROW AISLES.

MODEL #	# OF STEPS	OVERALL HEIGHT	PLATFORM W x L	BASE W x D	WEIGHT
KDED107246	7	112"	24" x 10"	35" x 57"	216
KDED108246	8	122"	24" x 10"	35" x 64"	273
KDED109246	9	132"	24" x 10"	35" x 69"	282
KDED110246	10	142"	24" x 10"	35" x 76"	311
KDED111246	11	152"	24" x 10"	35" x 83"	334
KDED112246	12	162"	24" x 10"	35" x 90"	360
KDED113246	13	172"	24" x 10"	35" x 96"	387
KDED114246	14	182"	24" x 10"	40" x 103"	411
KDED115246	15	192"	24" x 10"	40" x 110"	454
KDED116246	16	202"	24" x 10"	40" x 117"	489

NOTE: Models Shown are for Perforated Treads

ALL DIRECTION ROLLING LADDERS


- 450 lb. rated capacity
- Ladder turns within its own radius
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel rails
- Powder-coat gray finish
- Step lock all models
- Complies with applicable OSHA & ANSI standards



Perforated Tread (6)



Grip Strut (2)



TRI-ARC LADDER DIVISION





14" DEEP TOP STEP

Gradual 50° Slope ideal for carrying heavy or bulky items up or down the ladder

Available with ALL DIRECTIONAL OPTION

Recommended on all 10, 11 & 12 step models

50° SLOPE WALK DOWN LADDER

- 450 LB. CAPACITY
- 50° stairway slope allows easier climbing and descent
- Foot pedal activated lockstep
- 14" deep top step standard
- 21" and 28" deep top steps available
- Specify tread type when ordering
- Ships KD for freight savings
- Available fully assembled, specify (SU) set-up
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available

# OF STEPS INCLUDING TOP STEP	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP					
5 STEP	50"	83"	SW524	24 x 50	96
6 STEP	60"	93"	SW624	24 x 60	109
7 STEP	70"	103"	SW724	24 x 68	122
8 STEP	80"	113"	SW824	24 x 76	135
24" WIDE STEP					
5 STEP	50"	83"	SW532	32 x 50	115
6 STEP	60"	93"	SW632	32 x 60	120
7 STEP	70"	103"	SW732	32 x 68	139
8 STEP	80"	113"	SW832	32 x 76	165
9 STEP	90"	123"	SW932	32 x 85	180
10 STEP	100"	133"	SW1032	32 x 93	200
11 STEP	110"	143"	SW1132	32 x 101	210
12 STEP	120"	153"	SW1232	32 x 110	230

AVAILABLE TREAD TYPE OPTIONS:

- (P) Perforated (Standard)
- (R) Abrasive Mat
- (G) Heavy Duty Serrated Grating
- (X) Expanded Metal

SAFETY ANGLE ROLLING LADDERS



50° Slope Ladder

- 450 lb. rated capacity
- 17" deep top platform
- 50° safety angle incline
- Perforated or Grip strut tread
- Ships unassembled
- 1" tubular steel rails
- 1" x 2" reinforced back & bottom frame
- 8.5" deep steps, 10" deep 1st step
- Powder-coat gray finish
- Step lock on all models
- Complies with applicable OSHA & ANSI standards

Also available in Safety Yellow

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDEC103166	3	72	16" x 17"	27" x 41"	122
KDEC103246	3	72	24" x 17"	35" x 41"	139
KDEC104166	4	82	16" x 17"	27" x 49"	137
KDEC104246	4	82	24" x 17"	35" x 49"	150
KDEC105166	5	92	16" x 17"	27" x 58"	170
KDEC105246	5	92	24" x 17"	35" x 58"	185
KDEC106166	6	102	16" x 17"	27" x 66"	184
KDEC106246	6	102	24" x 17"	35" x 66"	201
KDEC107166	7	112	16" x 17"	27" x 74"	228
KDEC107246	7	112	24" x 17"	35" x 74"	245
KDEC108246	8	122	24" x 17"	35" x 82"	391
KDEC109246	9	132	24" x 17"	35" x 91"	306
KDEC110246	10	142	24" x 17"	35" x 99"	320
KDEC111246	11	152	24" x 17"	35" x 107"	352
KDEC112246	12	162	24" x 17"	35" x 116"	377
KDEC113246	13	172	24" x 17"	40" x 124"	405
KDEC114246	14	182	24" x 17"	40" x 132"	425
KDEC115246	15	192	24" x 17"	40" x 141"	521

Models Shown are for Perforated Treads



Perforated Tread (6)



Grip Strut (2)



Base Frame & Rear Vertical Rugged 2" X 1" Tubing

21" OR 28" DEEP TOP STEP



Available with **ALL DIRECTIONAL OPTION**

Recommended on all 10, 11 & 12 step models

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50"	83"	HDS-5	32 x 50	154
6 STEP	60"	93"	HDS-6	32 x 59	185
7 STEP	70"	103"	HDS-7	32 x 67	223
8 STEP	80"	113"	HDS-8	32 x 75	248
9 STEP	90"	123"	HDS-9	32 x 84	278
10 STEP	100"	133"	HDS-10	32 x 92	306
11 STEP	110"	143"	HDS-11	32 x 101	348
12 STEP	120"	153"	HDS-12	32 x 109	371

Ballymore's Component Design with Replaceable Parts!

AVAILABLE TREAD TYPES:

- (P) Perforated (Standard)
 - (G) Heavy Duty Serrated Grating
 - (R) Abrasive Mat
 - (X) Expanded Metal
- PLEASE SPECIFY WHEN ORDERING**



HEAVY DUTY STAIRWAY SLOPE LADDER

- **HEAVY DUTY - RUGGED 600 LBS. CAPACITY**
- 50° stairway slope allows easier climbing and descent
- 14" deep Top Step for added comfort & safety
- 10" deep intermediate steps
- 21" and 28" deep top steps are available

LADDER REPLACEMENT PARTS & OPTIONS

Optional Replaceable SKID PLATE FOR ROUGH SURFACES	PART #	DESCRIPTION	# PER SET
	*PR-2.....	2" Replacement Casters Sets.....	4
	*PR-3.....	3" Replacement Casters Sets.....	4
	PS.....	Replacement Springs.....	4
	PTHDS.....	Replacement Rubber Tips.....	4
	SBR-4.....	4" Replacement Casters Sets.....	4
	FW-2.....	10" Rubber Wheels.....	2
	DONUTS...	2.5" Donut Style Pads.....	2
Ladder Shelves & Trays	Rear Exit or Side Exit Available		
• Hanging Shelf • Hanging Tray	• 28" deep top step required for Side Exit • Not available on ladders with spring loaded casters • See price list for cost		

- Easy operating lockstep secures ladder to the floor
- Gray powder coat finish
- All direction option available
- Available with rear guardrail removed for walk through
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available

*Must specify # of steps and width (Set includes casters, springs, rubber tips and hardware)

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDHS106246	6	102	24" x 17"	35" x 66"	215
KDHS107246	7	112	24" x 17"	35" x 66"	257
KDHS108246	8	122	24" x 17"	35" x 82"	295
KDHS109246	9	132	24" x 17"	35" x 91"	322
KDHS110246	10	142	24" x 17"	35" x 99"	337
KDHS111246	11	152	24" x 17"	35" x 107"	371
KDHS112246	12	162	24" x 17"	35" x 116"	397

Models Shown are for Perforated Treads



600# HEAVY DUTY SAFETY ANGLE ROLLING LADDERS

- **600 lb. rated capacity**
- Additional bracing
- Safety angle incline
- Perforated or Grip strut tread
- Ships unassembled
- 1" tubular steel construction
- 1" x 2" reinforced back & bottom frame
- Powder coat gray finish
- Step lock on all models
- Complies with applicable OSHA & ANSI standards



BALLYMORE INTRODUCES WEIGHT ACTUATED LADDERS

S
A
F
E
T
Y

M
A
T
T
E
R
S

- STANDARD AND DEEP TOP STEP OPTIONS
- ALL DIRECTION
- GRADUAL SLOPE
- COMBINATION OF ABOVE



THE MOST DURABLE LOCK STEP ON THE MARKET TODAY!

Designed using finite element analysis, then robotically tested. Prototypes achieved over 60,000 cycles before replacing latch hook. **Then 60,000 more cycles!**



Apply 70 pounds of pressure to the steps & the ladder automatically drops the front feet to the ground securing the ladder to the floor for safe climbing.

Single pedal easily lifts ladder into the rolling position.

Patent No.: US 7,841,447 B2

ANOTHER EXCLUSIVE BALLYMORE INNOVATION:

Ballymore engineered its patented weight actuated lock step to provide an easy, safe and reliable mechanism to secure rolling ladders to the floor to ensure safe climbing and descent. Ladders equipped with our weight actuated lockstep lock to the ground when worker

steps on any step of the ladder and applies just 70 lbs of pressure. The weight actuated lockstep is designed to prevent two major accidents: utilizing the ladder while in the rolling position, and the ladder being pushed with another worker on the top platform.

**WHEN SAFETY COUNTS,
COUNT ON BALLYMORE.**

**IF SAFETY IS IMPORTANT, THIS IS THE ANSWER
AND IS ONLY AVAILABLE FROM BALLYMORE.**

Think Safety... Buy Weight Actuated. The Patented Lockstep from Ballymore



14" DEEP TOP STEP




59° SLOPE LADDER

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA052414	24 x 43	91
6 STEP	60"	93"	WA062414	24 x 49	100
7 STEP	70"	103"	WA072414	24 x 55	109
8 STEP	80"	113"	WA082414	24 x 61	127
24" WIDE STEP					
5 STEP	50"	83"	WA053214	32 x 43	110
6 STEP	60"	93"	WA063214	32 x 49	122
7 STEP	70"	103"	WA073214	32 x 55	143
8 STEP	80"	113"	WA083214	32 x 61	160
9 STEP	90"	123"	WA093214	32 x 68	175
10 STEP	100"	133"	WA103214	32 x 74	193
11 STEP	110"	143"	WA113214	32 x 80	205
12 STEP	120"	153"	WA123214	32 x 87	220
13 STEP	130"	175"	WA134014	40 x 94	250
14 STEP	140"	185"	WA144014	40 x 100	280
15 STEP	150"	195"	WA154014	40 x 106	310

SPECIFY TREAD TYPE WHEN ORDERING:




Perforated Tread



Expanded Metal Tread



Heavy Duty Serrated Grating



Abrasive Mat Tread

PATENTED WEIGHT ACTUATED LOCKSTEP LADDERS

Features:

- **450 LB. CAPACITY**
- This state of the art lockstep has one pedal which lifts the ladder into the rolling position
- As you climb the ladder your weight activates the lockstep - securing the ladder to the floor in the climbing position
- Available in 59° Ladder Slope or 50° Stairway Slope
- 14" deep top step standard 21" and 28" available
- Durable: manufactured with 1" OD tubing
- Complies with applicable OSHA & ANSI standards
- Gray powder coat finish
- CAL OSHA available



BALLYMORE SAFETY



Weight Actuated Lockstep combined

WEIGHT ACTUATED ALL DIRECTION LOCKSTEP LADDERS

- **450 LB. CAPACITY!**
- Patented lockstep - most durable in the industry, with All Direction Option
- Rolls on 4 swivel casters allowing ladder to move in all directions
- Your weight activates lockstep, locking ladder to the floor in the climbing position
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available



59° Slope Ladder

SPECIFY TREAD TYPE WHEN ORDERING:

- (P) Perforated
- (X) Expanded Metal
- (G) Heavy Duty Serrated Grating
- (R) Abrasive Mat

14" DEEP TOP STEP



# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA-AD-052414	24 x 43	91
6 STEP	60"	93"	WA-AD-062414	24 x 49	110
7 STEP	70"	103"	WA-AD-072414	24 x 55	125
8 STEP	80"	113"	WA-AD-082414	24 x 61	140
24" WIDE STEP					
5 STEP	50"	83"	WA-AD-053214	32 x 43	110
6 STEP	60"	93"	WA-AD-063214	32 x 49	133
7 STEP	70"	103"	WA-AD-073214	32 x 55	154
8 STEP	80"	113"	WA-AD-083214	32 x 61	171
9 STEP	90"	123"	WA-AD-093214	32 x 68	186
10 STEP	100"	133"	WA-AD-103214	32 x 74	204
11 STEP	110"	143"	WA-AD-113214	32 x 80	216
12 STEP	120"	153"	WA-AD-123214	32 x 87	231
13 STEP	130"	175"	WA-AD-134014	40 x 94	250
14 STEP	140"	185"	WA-AD-144014	40 x 100	280
15 STEP	150"	195"	WA-AD-154014	40 x 106	310

Patent No.: US 7,841,447 B2

BALLYMORE SAFETY

with All Directional Maneuverability

Weight Actuated Lockstep



All-Directional Caster System



WEIGHT ACTUATED 50° STAIRWAY SLOPE OPTION ALL DIRECTION LOCKSTEP LADDERS



- **450 LB. CAPACITY**
- Patented lockstep - most durable in the industry
- Your weight activates the lockstep as you climb, locking ladder to the floor in the climbing position
- 50° stairway slope allows easier climbing and descent
- Standard 14" deep top step, 21" & 28" top step available
- Durable 1" O.D. steel tubing
- Gray powder coat finish
- Available w/Rear Guard rail removed for easy walk through
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available

50° Stairway Slope allows easier climbing and descent.

14" DEEP TOP STEP



ALL DIRECTIONAL MOBILITY!

# OF STEPS INCLUDING TOP STEP	Height Inches		All Directional MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
5 STEP	50"	83"	WA-AD-SW-052414	24 x 50	96
6 STEP	60"	93"	WA-AD-SW-062414	24 x 60	109
7 STEP	70"	103"	WA-AD-SW-072414	24 x 68	122
8 STEP	80"	113"	WA-AD-SW-082414	24 x 76	135
24" WIDE STEP					
5 STEP	50"	83"	WA-AD-SW-053214	32 x 50	115
6 STEP	60"	93"	WA-AD-SW-063214	32 x 60	120
7 STEP	70"	103"	WA-AD-SW-073214	32 x 68	139
8 STEP	80"	113"	WA-AD-SW-083214	32 x 76	165
9 STEP	90"	123"	WA-AD-SW-093214	32 x 85	180
10 STEP	100"	133"	WA-AD-SW-103214	32 x 92	200
11 STEP	110"	143"	WA-AD-SW-113214	32 x 101	210
12 STEP	120"	153"	WA-AD-SW-123214	32 x 110	230

SPECIFY TREAD TYPE WHEN ORDERING:

- (P) Perforated (R) Abrasive Mat
(G) Heavy Duty Serrated Grating (X) Expanded Metal



Monster Line Rolling Safety Ladder • Most Heavy-Duty Rolling Ladder in the Industry

MONSTER LINE LADDERS

- Patented Weight Actuated Lockstep
- Rugged 2" x 1" Rectangular tubing base frame and rear vertical
- 21" deep top step
- 59 degree slope
- 24" wide steps standard
- High quality non marking wheels w/roller bearings and dust cover
- Rear corner bumpers - standard
- All-Directional option available
- Gray powder coat finish
- Available w/o rear guard-rail for easy walk through
- Complies with applicable OSHA & ANSI standards• CAL OSHA available
- Certified in Canada

# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
6 STEP	60"	93"	ML063221	32" x 53"	165
7 STEP	70"	103"	ML073221	32" x 59"	189
8 STEP	80"	113"	ML083221	32" x 66"	209
9 STEP	90"	123"	ML093221	32" x 72"	227
10 STEP	100"	133"	ML103221	32" x 78"	248
11 STEP	110"	143"	ML113221	32" x 84"	263
12 STEP	120"	153"	ML123221	32" x 90"	281
13 STEP	130"	175"	ML134021	40" x 96"	314
14 STEP	140"	185"	ML144021	40" x 102"	347
15 STEP	150"	195"	ML154021	40" x 108"	380

Base Frame & Rear Vertical Rugged 2" X 1" Tubing

Base Frame & Rear Vertical Rugged 2" x 1" Rectangular Tubing • 21" Deep Top Step Standard • Patented Weight Actuated Lockstep Specify tread when ordering.

Extra Heavy Duty 600 Lb. Capacity!

21" DEEP TOP STEP



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)

MEETS OR EXCEEDS

 REQUIREMENTS

POWDER
 COATED
TOUGH™

600# HEAVY DUTY ROLLING LADDERS

**Extra Heavy
 Duty 600 Lb.
 Capacity!**



- 600 lb. rated capacity
- Additional bracing
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coated gray finish
- Step lock on all models
- Complies with applicable OSHA & ANSI standards



Perforated Tread (6)



Grip Strut (2)

MODEL #	# OF STEPS	OVERALL HEIGHT	PLATFORM W x L	BASE W x D	WEIGHT
KDHD106246	6	102	24" x 10"	35" x 70"	197
KDHD107246	7	112	24" x 10"	35" x 57"	212
KDHD108246	8	122	24" x 10"	35" x 64"	275
KDHD109246	9	132	24" x 10"	35" x 69"	297
KDHD110246	10	142	24" x 10"	35" x 76"	317
KDHD111246	11	152	24" x 10"	35" x 83"	337
KDHD112246	12	162	24" x 10"	35" x 90"	364

Models Shown are for Perforated Treads



THE NAVIGATOR

ALL DIRECTION ROLLING LADDER WITH WEIGHT ACTUATED LOCKSTEP

Shown with Folding Rails



Unique Patented Design & Engineering

Specifically designed to provide easy access to narrow aisles and tight spaces. A safer option to "A" frame ladders, the Navigator includes handrails and a more gradual climbing slope. The patented weight actuated lockstep gives the ladder a very secure feeling when climbing. Designed to provide increased safety, reducing accidents and worker's compensation claims.

Features:

- 450 lbs.. capacity
- 14" Deep Top Step
- Available 7-10 Steps
- All Directional maneuverability
- Patented weight activated lockstep
- Standard fixed rails or folding side rails
- Ships KD in a box, reducing freight cost and minimizing risk of freight damage
- Available fully assembled, specify (SU) set-up
- Gray powder coat finish
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available

Raised base makes tight turns possible



PATENTED WEIGHT ACTUATED LOCKSTEP


# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
THE NAVIGATOR WITH STANDARD FIXED SIDE RAILS					
7 STEP	70	103	NAV-7RS	26 x 51	160
8 STEP	80	113	NAV-8RS	26 x 57	176
9 STEP	90	123	NAV-9RS	26 x 63	192
10 STEP	100	133	NAV-10RS	26 x 69	210
THE NAVIGATOR WITH FOLDING SIDE RAILS					
9 STEP	90	123	NAV-9RF	26 x 63	192
10 STEP	100	133	NAV-10RF	26 x 69	210

Available in Abrasive Mat Tread

TYPICAL END USE:

- Stores that up-stock product on the showroom floor
- Retail Stores with tight aisles
- Warehouse Applications
- Stockrooms • Storage Areas

SHIP KD
For Reduced Shipping Cost

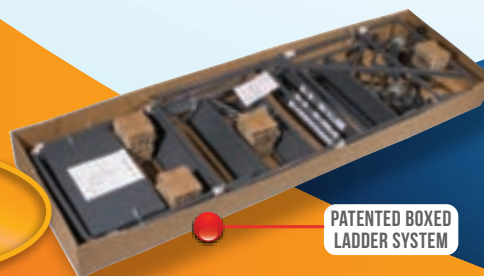

PATENTED BOXED LADDER SYSTEM

Ideal for ease of maneuvering in tight spaces or narrow aisles.




ALL-DIRECTIONAL SAFETY ANGLE ROLLING LADDERS

- **450 lb. rated capacity**
- Ladder turns within its own radius
- 17" deep top platform
- Gradual descent 50° incline
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel rails
- 1" x 2" reinforced back & bottom frame
- 8.5" deep steps, 10" deep 1st step
- Powder-coated gray finish
- Step lock on all models
- Complies with applicable OSHA & ANSI standards

MEETS OR EXCEEDS

 REQUIREMENTS

POWDER COATED TOUGH™



Perforated Tread (6)



Grip Strut (2)

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDAD107246	7	112	24" x 17"	35" x 74"	274
KDAD108246	8	122	24" x 17"	35" x 82"	310
KDAD109246	9	132	24" x 17"	35" x 91"	336
KDAD110246	10	142	24" x 17"	35" x 99"	350
KDAD111246	11	152	24" x 17"	35" x 107"	383
KDAD112246	12	162	24" x 17"	35" x 116"	408
KDAD113246	13	172	24" x 17"	40" x 124"	430
KDAD114246	14	182	24" x 17"	40" x 132"	525
KDAD115246	15	192	24" x 17"	40" x 141"	569

Models Shown are for Perforated Treads



STOCK PICKING ROLLING LADDERS

Combines the benefits of a rolling safety ladder and a stock-picking cart!




- **COMBINED 600 LBS. CAPACITY**
- 450 lbs. Max for ladder
- 300 lbs. Max for shelves
- Combines the benefits of a rolling safety ladder and a stock-picking cart
- 16" or 24" wide steps
- 14" or 21" deep top step
- Sturdy Stock Shelves:
 - 2 shelves on 6 - 7 step models
 - 3 shelves on 8 - 12 step models
- Specify Tread Type when Ordering Ladders
- Gray powder coat finish
- CAL OSHA available
- Ships unassembled & boxed to reduce freight costs
- Complies with applicable OSHA & ANSI standards

# OF STEPS INCLUDING TOP STEP	Height Inches		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14N	24 x 49	80
7 STEP	70	103	SPL-7-14N	24 x 55	89
8 STEP	80	113	SPL-8-14N	24 x 61	120
16" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6-N	24 x 56	91
7 STEP	70	103	SPL-7-N	24 x 63	100
8 STEP	80	113	SPL-8-N	24 x 68	131
24" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14	32 x 49	150
7 STEP	70	103	SPL-7-14	32 x 55	166
8 STEP	80	113	SPL-8-14	32 x 61	205
9 STEP	90	123	SPL-9-14	32 x 68	215
10 STEP	100	133	SPL-10-14	32 x 74	225
11 STEP	110	143	SPL-11-14	32 x 80	235
12 STEP	120	153	SPL-12-14	32 x 87	250
24" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6	32 x 56	160
7 STEP	70	103	SPL-7	32 x 63	176
8 STEP	80	113	SPL-8	32 x 68	215
9 STEP	90	123	SPL-9	32 x 76	225
10 STEP	100	133	SPL-10	32 x 82	235
11 STEP	110	143	SPL-11	32 x 87	245
12 STEP	120	153	SPL-12	32 x 94	260

Please specify tread type when ordering.

STOCK PICKING ROLLING LADDERS

- **450 lb. rated capacity**
- 2 shelves 6 - 7 step models
- 3 shelves 8 - 12 step models
- 20" deep top platform
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coat gray finish
- Step lock 6-12 step models
- Complies with applicable OSHA & ANSI standards

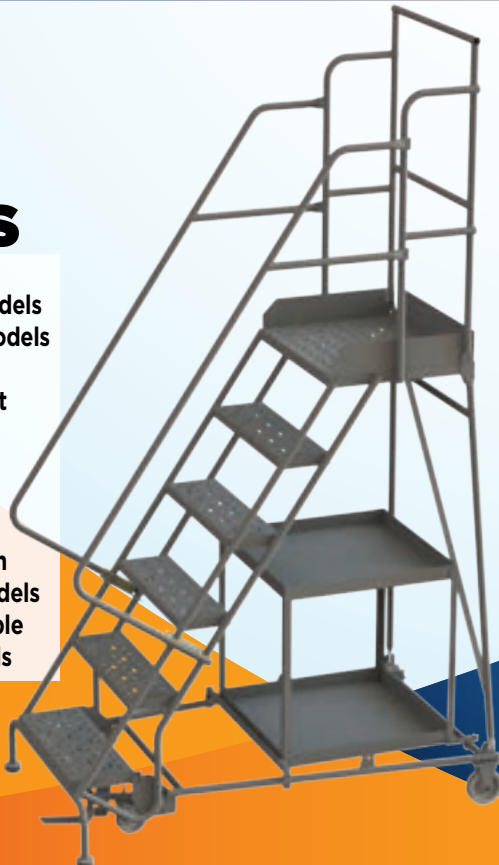

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDSP106246	6	102	24" x 20"	35" x 60"	230
KDSP107246	7	112	24" x 20"	35" x 66"	244
KDSP108246	8	122	24" x 20"	35" x 73"	303
KDSP109246	9	132	24" x 20"	35" x 78"	332
KDSP110246	10	142	24" x 20"	35" x 92"	281
KDSP111246	11	152	24" x 20"	35" x 92"	306
KDSP112246	12	162	24" x 20"	35" x 99"	416





LOCK-N-STOCK FOLDING LADDER STANDS

- Heavy duty rated for 350 lbs.**
- Welded construction
 - Easy to maneuver in the open or closed positions
 - Locks in the folded or climbing position
 - No hinge to break
 - 16" Wide steps
 - Blue powder coat finish
 - Approximately 10" deep when folded for easy storage
 - Complies with applicable OSHA & ANSI standards

- The Standard Folding Ladder**
- 7" Deep top step
 - 22" High handles

- The Modified Folding Ladder**
- 10" Deep top step
 - 30" Handrails with guard rail

Now Available in Aluminum See Page 34 *Climb it, Roll it, Fold it & Store it!*

MODEL NUMBER	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WEIGHT LBS.	OPEN WIDTH & LENGTH	FOLDED SIZE	SHIPS UPS (Oversize *)
LS2247	2 STEP	19"	36 lbs.	24 x 17	10 x 24 x 41	YES*
LS3247	3 STEP	28.5"	44 lbs.	24 x 23	10 x 24 x 52	YES*
LS4247	4 STEP	38"	51 lbs.	24 x 30	10 x 24 x 65	YES*
LS32410	3 STEP	28.5"	46 lbs.	24 x 28	14 x 24 x 62	YES*
LS42410	4 STEP	38"	52 lbs.	24 x 35	14 x 24 x 73	YES*

Combines the features and benefits of a rolling ladder and step stand

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDMF102166	2	44	16" x 10"	21" x 20"	34
KDMF103166	3	54	16" x 10"	21" x 27"	43
KDMF104166	4	64	16" x 10"	21" x 34"	52

Perforated Tread Only



MOBILE FOLDAWAY STEP STAND

- Easily folds for storage
- 10" deep top platform
- 7" deep steps
- 300 lb. rated capacity
- Perforated tread
- Ships knocked down
- 1-1/6" tubular steel construction
- Powder-coated gray finish
- Complies with applicable OSHA & ANSI standards



BALLYMORE SAFETY

TRI-ARC LADDER DIVISION



POWDER COATED TOUGH™

TILT & ROLL LADDERS

- 450 LB. CAPACITY
- Balanced design allows ladder to tilt easily and roll effortlessly on two 4" large wheels
- 16" or 24" wide steps
- Specify tread type when ordering
- Ships unassembled in a box
- Fully assembled ladders available - specify (SU)
- Gray powder coat finish
- Some ladders are produced "All-Welded"
- Complies with applicable OSHA & ANSI standards



Straddle Base Model #HL-4

# OF STEPS INCLUDING TOP STEP	Height Inches		TILT & ROLL MODEL #	BASE W" x L"	WEIGHT Lbs.	Extra Features	
	TOP STEP	OVER ALL					
TR-24" WIDE STEP							
2 STEP	20	53	TR-2	30 x 34	60	WITH TR 20" DEEP TOP STEP	
3 STEP	30	63	TR-3	30 x 40	73		
4 STEP	40	73	TR-4	30 x 46	88		
5 STEP	50	83	TR-5	30 x 52	102		
6 STEP	60	93	TR-6	30 x 58	117		
HL-24" WIDE STEP							
2 STEP	20	53	HL-2NS	26 x 32	72	WITH STRADDLE BASE	
3 STEP	30	63	HL-3NS	26 x 38	84		
4 STEP	40	73	HL-4NS	26 x 44	96		
5 STEP	50	83	HL-5NS	26 x 50	108		
6 STEP	60	93	HL-6NS	26 x 56	128		
16" WIDE STEP							
2 STEP	19	49	H218TR	20 x 24	36	ALL WELDED CONSTRUCTION -----	
3 STEP	28.5	58.5	H318TR	20 x 30	45		
4 STEP	38	68	H418TR	20 x 36	56		
24" WIDE STEP							
2 STEP	19	49	H226TR	30 x 24	42		10" DEEP TOP STEP
3 STEP	28.5	58.5	H326TR	30 x 30	50		
4 STEP	38	68	H426TR	30 x 36	65		
16" WIDE STEP							
4 STEP	40	73	FSTR418	20 x 40	68	SHIPS BOXED UNASSEMBLED -----	
5 STEP	50	83	FSTR518	20 x 47	75		
6 STEP	60	93	FSTR618	24 x 54	83		
TR-24" WIDE STEP							
4 STEP	40	73	FSTR426	30 x 40	80		14" DEEP TOP STEP
5 STEP	50	83	FSTR526	30 x 47	87		
6 STEP	60	93	FSTR626	30 x 54	98		

Models Shown are for Expanded Metal Tread

SHIPS BOXED

- Lowers shipping costs
- Minimizes freight damage risk
- Boxes stack easily allowing cost effective stocking of ladders

POWDER COATED TOUGH™



Perforated Tread (6)



Grip Strut (2)

TILT & ROLL LADDERS

- 450 LB. CAPACITY
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coat gray finish
- Complies with applicable OSHA & ANSI standards

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDTF102166	2	62	16" x 10"	23" x 23"	80
KDTF102246	2	62	24" x 10"	31" x 23"	80
KDTF103166	3	72	16" x 10"	24" x 30"	90
KDTF103246	3	72	24" x 10"	31" x 30"	90
KDTF104166	4	82	16" x 10"	24" x 37"	90
KDTF104246	4	82	24" x 10"	31" x 37"	90
KDTF105166	5	92	16" x 10"	24" x 44"	107
KDTF105246	5	92	24" x 10"	31" x 44"	107
KDTF106166	6	102	16" x 10"	27" x 52"	130
KDTF106246	6	102	24" x 10"	35" x 52"	134
KDTF107166	7	112	16" x 10"	31" x 59"	144
KDTF107246	7	112	24" x 10"	37" x 59"	240

Models Shown are for Perforated Treads





# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50"	83"	FAWL-5	30 x 46	90
6 STEP	60"	93"	FAWL-6	30 x 52	100
7 STEP	70"	103"	FAWL-7	30 x 58	110
8 STEP	80"	113"	FAWL-8	30 x 64	120
9 STEP	90"	123"	FAWL-9	30 x 70	135
10 STEP	100"	133"	FAWL-10	30 x 76	148
11 STEP	110"	143"	FAWL-11	30 x 82	165
12 STEP	120"	153"	FAWL-12	30 x 88	175

POWDER COATED TOUGH™

14" DEEP TOP STEP

• 30" HIGH HAND RAILS

FOLD & STORE LADDERS

- 350 LB. CAPACITY
- Can be folded for storage or transportation
- Tilt and roll mobility
- Large 10" rubber wheels roll easily on rough surfaces
- 16" Wide Treads
- Ships un-assembled
- Tools required to fold
- Complies with applicable OSHA & ANSI standards



MODEL #FAWL-6

SPECIFY TREAD TYPE WHEN ORDERING:
(X) Expanded Metal
(P) Perforated
(G) Heavy Duty Serrated Grating



Optional Replaceable SKID PLATE FOR ROUGH SURFACES

Can be folded for storage or transport. Easy tilt & roll mobility

Models Shown are for Perforated Treads

BALLYMORE SAFETY



Perforated Tread (6)



Grip Strut (2)

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
KDRF103166	3	72	16" x 10"	29" x 32.5"	90
KDRF104166	4	82	16" x 10"	29" x 39.5"	100
KDRF105166	5	92	16" x 10"	31" x 46.5"	112
KDRF106166	6	102	16" x 10"	31" x 54.5"	143
KDRF107166	7	112	16" x 10"	31" x 61.5"	156
KDRF108166	8	122	16" x 10"	37" x 68.5"	206
KDRF109166	9	132	16" x 10"	37" x 73.5"	225
KDRF110166	10	142	16" x 10"	37" x 80.5"	245
KDRF111166	11	152	16" x 10"	37" x 87.5"	254
KDRF112166	12	162	16" x 10"	37" x 94.5"	275

POWDER COATED TOUGH™

ALL-TERRAIN LADDERS

- 450 lb. rated capacity
- 10" semi-pneumatic wheels
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coat finish
- Tools required to fold
- Complies with applicable OSHA & ANSI standards



MEETS OR EXCEEDS
 OSHA ANSI
 REQUIREMENTS

Models Shown are for Perforated Treads

TRI-ARC LADDER DIVISION



MEETS OR EXCEEDS
 OSHA ANSI
 REQUIREMENTS

GATEWAY REAR EXIT ROLLING LADDER

- Large 30" deep top platform
- 450 lb. rated capacity
- Perforated or Grip Strut tread
- Ships unassembled
- 1" tubular steel construction
- Powder-coat gray finish
- Step lock standard on all models
- Complies with applicable OSHA & ANSI standards



POWDER
 COATED
TOUGH™


# OF STEPS	OVERALL HEIGHT	PLATFORM W x L	BASE W x D	WEIGHT	MODEL # PERFORATED	MODEL # GRIP STRUT
6	106	24" x 30"	35" x 70"	280	KDSR106246-XR	KDSR106242-XR
7	116	24" x 30"	35" x 77"	300	KDSR107246-XR	KDSR107242-XR
8	126	24" x 30"	35" x 84"	325	KDSR108246-XR	KDSR108242-XR
9	136	24" x 30"	35" x 89"	361	KDSR109246-XR	KDSR109242-XR
10	146	24" x 30"	35" x 96"	350	KDSR110246-XR	KDSR110242-XR
11	156	24" x 30"	35" x 103"	401	KDSR111246-XR	KDSR111242-XR
12	166	24" x 30"	35" x 110"	415	KDSR112246-XR	KDSR112242-XR
13	176	24" x 30"	40" x 116"	552	KDSR113246-XR	KDSR113242-XR
14	186	24" x 30"	40" x 123"	472	KDSR114246-XR	KDSR114242-XR
15	196	24" x 30"	40" x 130"	575	KDSR115246-XR	KDSR115242-XR

TRI-ARC LADDER DIVISION

WALK-THRU



STANDARD

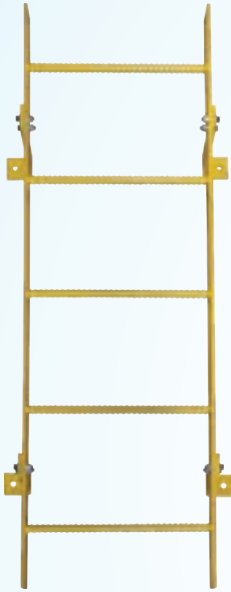

NEW



FIXED STEEL LADDERS

- Side rail 2 - 1/2" x 3/8" flat bar
- Solid round 3/4" rungs
- 12" spacing between rungs
- 18" ladder width
- 42" guardrails on walk-thru models
- Powder-coat yellow finish
- Complies with applicable OSHA & ANSI standards

SHIPS IN A BOX



Fixed ladders are shipped in a box. Standard ladder sections, in rung lengths from 4-7 steps, are combined to form a finished kit. A boxed walk-thru section can be added as well. Boxed ladders provide huge freight savings!

Standard	Walk-thru		
Model #	Model #	# of Rungs	Length top to bottom rung
WLFS0104-Y	WLFS0204-Y	4	3'
WLFS0105-Y	WLFS0205-Y	5	4'
WLFS0106-Y	WLFS0206-Y	6	5'
WLFS0107-Y	WLFS0207-Y	7	6'
WLFS0108-Y	WLFS0208-Y	8	7'
WLFS0109-Y	WLFS0209-Y	9	8'
WLFS0110-Y	WLFS0210-Y	10	9'
WLFS0111-Y	WLFS0211-Y	11	10'
WLFS0112-Y	WLFS0212-Y	12	11'
WLFS0113-Y	WLFS0213-Y	13	12'
WLFS0114-Y	WLFS0214-Y	14	13'
WLFS0115-Y	WLFS0215-Y	15	14'
WLFS0116-Y	WLFS0216-Y	16	15'
WLFS0117-Y	WLFS0217-Y	17	16'
WLFS0118-Y	WLFS0218-Y	18	17'
WLFS0119-Y	WLFS0219-Y	19	18'
WLFS0120-Y	WLFS0220-Y	20	19'

Must be skidded. See price sheet for skidding cost.



Heavy Duty Mobile Work Platforms increase productivity by simplifying maintenance operations.

HEAVY DUTY MOBILE WORK PLATFORMS

- **RUGGED 2" X 1" RECT-ANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**
- **800 LB. CAPACITY**
- Also available in aluminum and stainless steel
- Sturdy 1" tubular steel rails
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters
- 36" high handrails with midrail
- Complies with applicable OSHA & ANSI standards
- Gray powder coat finish
- Ships unassembled in a box



Extra Heavy Duty 800 Lb. Capacity!

Now Available with Side or Rear Exits and with a more gradual stairway slope

- Designed to accommodate more than one worker.
- Also available in aluminum and stainless steel.
- **Add platform length to model # when ordering**



- **Manufacturers • Assembly Lines • Warehouses**
- **Distribution Centers • Maintenance Operations • Stockrooms**

BALLYMORE SAFETY

SINGLE ENTRY WORK PLATFORMS											
MODEL WITHOUT HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	SNR3-24	105	33 x 48	127	33 x 60	149	33 x 72	171	33 x 84
3 STEP	30"	36"	SNR3-36	121	38 x 48	143	38 x 60	150	38 x 72	187	38 x 84
4 STEP	40"	24"	SNR4-24	121	33 x 54	143	33 x 66	165	33 x 78	187	33 x 90
4 STEP	40"	36"	SNR4-36	138	38 x 54	160	38 x 66	182	38 x 78	204	38 x 90
MODEL WITH HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	SEP3-24	136	33 x 48	151	33 x 60	172	33 x 72	193	33 x 84
3 STEP	30"	36"	SEP3-36	153	38 x 48	178	38 x 60	202	38 x 72	226	38 x 84
4 STEP	40"	24"	SEP4-24	151	33 x 54	165	33 x 66	186	33 x 78	207	33 x 90
4 STEP	40"	36"	SEP4-36	167	38 x 54	193	38 x 66	217	38 x 78	240	38 x 90
5 STEP	50"	24"	SEP5-24	165	33 x 60	178	33 x 72	199	33 x 84	220	33 x 96
5 STEP	50"	36"	SEP5-36	182	38 x 60	206	38 x 72	230	38 x 84	253	38 x 96
6 STEP	60"	24"	SEP6-24	178	33 x 66	193	33 x 78	215	33 x 90	237	33 x 102
6 STEP	60"	36"	SEP6-36	198	38 x 66	220	38 x 78	245	38 x 90	270	38 x 102
7 STEP	70"	24"	SEP7-24	193	33 x 73	209	33 x 85	230	33 x 97	251	33 x 108
7 STEP	70"	36"	SEP7-36	215	38 x 73	237	38 x 85	273	38 x 97	308	38 x 108



MOBILE STEEL WORK PLATFORMS



- 800 lb. rated capacity
- Grip Strut tread
- Ships all-welded
- 50° safety angle incline
- Powder-coat gray finish
- Two 4" casters for easy transport; non-handrail models
- Step lock standard on handrail models
- Two 2.5" diameter pads for stability
- 1" tubular steel construction
- Complies with applicable OSHA & ANSI standards



Also available in Safety Yellow

WITH HANDRAILS							
Grip Strut							
MODEL #	# of Steps	Step Width	Platform Height	Overall Height	Overall Length	Overall Length	Weight
24" W X 24" L PLATFORM							
WLWP122424SL	2	24"	20"	56"	35"	35"	76
WLWP132424SL	3	24"	30"	66"	43"	35"	91
WLWP142424SL	4	24"	40"	76"	51"	35"	110
WLWP152424SL	5	24"	50"	86"	60"	35"	120
24" W X 35" L PLATFORM							
WLWP122436SL	2	24"	20"	56"	46"	35"	91
WLWP132436SL	3	24"	30"	66"	54"	35"	106
WLWP142436SL	4	24"	40"	76"	62"	35"	121
WLWP152436SL	5	24"	50"	86"	71"	35"	135
24" W X 47" L PLATFORM							
WLWP122448SL	2	24"	20"	56"	58"	35"	85
WLWP132448SL	3	24"	30"	66"	66"	35"	118
WLWP142448SL	4	24"	40"	76"	74"	35"	138
WLWP152448SL	5	24"	50"	86"	83"	35"	157
36" W X 35" L PLATFORM							
WLWP123636SL	2	36"	20"	56"	46"	40"	122
WLWP133636SL	3	36"	30"	66"	54"	40"	137
WLWP143636SL	4	36"	40"	76"	62"	40"	152
WLWP153636SL	5	36"	50"	86"	71"	40"	174
36" W X 47" L PLATFORM							
WLWP123648SL	2	36"	20"	56"	58"	40"	148
WLWP133648SL	3	36"	30"	66"	66"	40"	163
WLWP143648SL	4	36"	40"	76"	74"	40"	178
WLWP153648SL	5	36"	50"	86"	83"	40"	206

WITHOUT HANDRAILS							
Grip Strut							
MODEL #	# of Steps	Step Width	Platform Height	Overall Height	Overall Length	Overall Length	Weight
24" W X 24" L PLATFORM							
WLWP022424	2	24"	20"	20"	35"	28"	50
WLWP032424	3	24"	30"	30"	42"	28"	65
WLWP042424	4	24"	40"	40"	51"	28"	80
24" W X 35" L PLATFORM							
WLWP022436	2	24"	20"	20"	46"	28"	65
WLWP032436	3	24"	30"	30"	53"	28"	80
WLWP042436	4	24"	40"	40"	62"	28"	100
24" W X 47" L PLATFORM							
WLWP022448	2	24"	20"	20"	58"	28"	72
WLWP032448	3	24"	30"	30"	65"	28"	100
WLWP042448	4	24"	40"	40"	74"	28"	120
36" W X 35" L PLATFORM							
WLWP023636	2	36"	20"	20"	46"	40"	88
WLWP043636	4	36"	40"	40"	62"	40"	130
36" W X 47" L PLATFORM							
WLWP023648	2	36"	20"	20"	58"	40"	112
WLWP043648	4	36"	40"	40"	74"	40"	145



**Extra Heavy
Duty 800 Lb.
Capacity!**

HEAVY DUTY DOUBLE ENTRY WORK PLATFORMS

- **RUGGED 2" X 1" RECTANGULAR TUBING BASE FRAME & REAR VERTICAL WELDMENT**
- **800 LB. CAPACITY**
- Also available in aluminum and stainless steel
- Sturdy 1" tubular steel rails
- Self cleaning slip resistant serrated grating

Heavy Duty Mobile Work Platforms increase productivity by simplifying maintenance operations.

- Designed to accommodate two workers.
- Also available in aluminum and stainless steel.
- **Add platform length to model # when ordering**
- 36" high handrails • Ships unassembled in a box
- Sturdy 1" tubular steel rails with midrail
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with large 4" casters



**AVAILABLE
IN STANDARD
AND STAIRWAY
SLOPE (SW)**



DOUBLE ENTRY WORK PLATFORMS

				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	DEP3-24	202	33 x 60	220	33 x 72	240	33 x 84	260	33 x 96
3 STEP	30"	36"	DEP3-36	226	38 x 60	242	38 x 72	262	38 x 84	282	38 x 96
4 STEP	40"	24"	DEP4-24	227	33 x 73	245	33 x 85	265	33 x 97	284	33 x 108
4 STEP	40"	36"	DEP4-36	248	38 x 73	264	38 x 85	287	38 x 97	306	38 x 108
5 STEP	50"	24"	DEP5-24	251	33 x 85	271	33 x 97	290	33 x 109	308	33 x 121
5 STEP	50"	36"	DEP5-36	270	38 x 85	292	38 x 97	312	38 x 109	330	38 x 121
6 STEP	60"	24"	DEP6-24	276	33 x 98	295	33 x 110	315	33 x 121	332	33 x 133
6 STEP	60"	36"	DEP6-36	297	38 x 98	314	38 x 110	337	38 x 121	352	38 x 133
7 STEP	70"	24"	DEP7-24	300	33 x 110	319	33 x 122	339	33 x 134	356	33 x 146
7 STEP	70"	36"	DEP7-36	319	38 x 110	341	38 x 122	362	38 x 134	380	38 x 146

BALLYMORE SAFETY

- Lightweight - lift & roll wheelbarrow portability
- 59° ladder slope or gradual 50° stairway slope
- 2" x 1" rectangular rear vertical
- Heavy duty serrated grating step tread
- No Rear Guardrail standard for easy walk through (includes snap chain)

TRUCK/DOCK ACCESS LADDERS

- **450 lb. CAPACITY**
- **Ideal for accessing trucks or loading docks**
- **21" deep top step**
- **10" rear rubber wheels** - Great on parking lots or rough surfaces
- **Gray powder coat finish**
- **Complies with applicable OSHA & ANSI standards**



LADDER SLOPE 59°					
MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
TA-5-24	50"	80"	24"	32" x 53"	145
TA-5-36	50"	80"	36"	44" x 53"	170
STAIRWAY SLOPE LADDER SLOPE 50 DEGREE					
SW-TA-5-24	50"	80"	24"	32" x 60"	155
SW-TA-5-36	50"	80"	36"	44" x 60"	180

Models Shown are for Serrated Treads



Also available in Grip Strut

MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
WISS106242	6	95	24" x 10"	27" x 58"	231
WISS107242	7	104.5	24" x 10"	27" x 67.5"	261
WISS108242	8	114	24" x 10"	27" x 68"	280
WISS109242	9	123.5	24" x 10"	27" x 87"	309
WISS110242	10	133	24" x 10"	27" x 96"	333
WISS111242	11	142.5	24" x 10"	27" x 105"	362
WISS112242	12	152	24" x 10"	27" x 115"	381

Models Shown are for Grip Treads

INDUSTRIAL ACCESS STAIRWAY LADDERS

- **45° safety angle incline**
- **Perforated or Grip Strut tread**
- **Ships all-welded**
- **1.5" round tubular hand rails**
- **1" x 2" rectangular frame**
- **Powder-coated gray finish**
- **Complies with applicable OSHA & ANSI standards**





ADJUSTABLE HEIGHT HEAVY DUTY STEEL WORK PLATFORMS

- 500 lb. Load Capacity
- Gray Powder Coat Finish
- Slip resistant heavy duty serrated grating
- Platforms 24"- 48" long, have 4 legs, longer platforms have 6 legs

HEIGHTS from 5" to 8"			HEIGHTS from 9" to 14"	
MODEL #	W" x L"	Weight	MODEL #	W" x L"
AWP5-2424	24 x 24	38	AWP9-2424	24 x 24
AWP5-2436	24 x 36	52	AWP9-2436	24 x 36
AWP5-2448	24 x 48	66	AWP9-2448	24 x 48
AWP5-2459	24 x 59	80	AWP9-2459	24 x 59
AWP5-2471	24 x 71	106	AWP9-2471	24 x 71
AWP5-2497	24 x 97	138	AWP9-2497	24 x 97

Models Shown are for Serrated Treads

ADJUSTABLE HEIGHT ONE STEP WORK PLATFORMS

- 800 lb. rated capacity
- Heavy gauge steel construction
- Powder-coated finish
- Powder-coated gray finish
- Complies with applicable OSHA & ANSI standards

Ergo Matting			
MODEL #	Platform Length	Platform Width	Weight
5"-8" HEIGHT ADJUSTMENT			
MCOS24195	24"	19"	34
MCOS24245	24"	24"	40
MCOS36195	36"	19"	45
MCOS36245	36"	24"	55
MCOS48195	48"	19"	55
MCOS48245	48"	24"	59
MCOS72245	72"	24"	49
9"-14" HEIGHT ADJUSTMENT			
MCOS24199	24"	19"	37
MCOS24249	24"	24"	44
MCOS36199	36"	19"	48
MCOS36249	36"	24"	97
MCOS48199	48"	19"	99
MCOS48249	48"	24"	112
MCOS72249	72"	24"	139

Grip Strut			
MODEL #	Platform Length	Platform Width	Weight
5"-8" HEIGHT ADJUSTMENT			
WLOS524242	24"	24"	68
WLOS536242	36"	24"	79
WLOS548242	48"	24"	92
WLOS559242	59"	24"	102
WLOS571242	71"	24"	114
WLOS597242	97"	24"	190
9"-14" HEIGHT ADJUSTMENT			
WLOS924242	24"	24"	70
WLOS936242	36"	24"	82
WLOS948242	48"	24"	95
WLOS959242	59"	24"	105
WLOS971242	71"	24"	117
WLOS997242	97"	24"	193





Provides fall protection during routine maintenance & inspection of refrigeration units on small- to medium-sized trucks

REFRIGERATOR TRUCK ROLLING ACCESS PLATFORMS



MODEL #	RA10FT-R09
Platform Height	103" to 115"
Base Length	130"
Base Width	50"
Platform Length	120"
Platform Width	24"
Overall Height	145" to 157"
Handrail Height	42"
# of Guard Rails	3
# of Steps	7
Step Width	24"
Step Depth	7"

- Adjustable platform height (12" adjustability in 4" increments)
- 450 lb. Load Capacity
- Large platform to perform work from 24" W x 120" L
- Serrated tread surface offers excellent slip resistance and drainage properties
- Ladders on both sides for dual access
- Snap chains at entry/exit points and on refrigeration unit access opening
- Designated lifting point for using rope and bucket to bring tools or parts from ground to platform
- Reinforced lifting points on each ladder at 4th step to accommodate adjustability using standard engine puller
- Powder-coated safety yellow
- Ships in 3 pieces (1 platform, 2 ladders); assembly required

TRI-ARC LADDER DIVISION

STEEL						
Anti-Slip	Perforated	Grip Strut				
MODEL #	MODEL #	MODEL #	# of Steps	Step Height	Step Width	Step Length
WLSR001163-WM	WLSR001166	WLSR001162	1	12"	16"	10"
WLSR001234	WLSR001246	WLSR001242	1	12"	24"	10"

MOBILE STEP STOOL

- 450 rated capacity - Steel
- Anti-Slip, Perforated or Grip Strut - Steel
- Solid Ribbed or Grip Strut - Aluminum
- Powder-coated gray finish - Steel
- Standard mill finish - Aluminum
- Ships UPS
- Complies with applicable OSHA & ANSI standards





Stainless Steel Ladders Ideal for Wash Down & Corrosive Environments

STAINLESS STEEL ROLLING LADDERS

- **450 LB. CAPACITY**
- Ideal for wash down and corrosive environments
- Type T304 Stainless Steel construction
- 1-3 step ladders are all welded and have a 10" deep top step
- 4-12 step ladders have 14" deep top step standard
- Deeper top steps available on all models
- Bead blasted for uniform finish
- Casters for lock step ladders are stainless steel
- Spring Loaded casters are stainless and springs are carbon steel
- Complies with applicable OSHA & ANSI standards
- CAL OSHA available

AVAILABLE TREAD TYPES
Please specify when ordering.



Perforated Tread (P)



Heavy Duty Serrated Grating (G)

Ships unassembled in a box

Note: All stainless ladders are manufactured with industrial grade welds, not recommended for clean rooms.

SPRING LOADED CASTER MODELS



Spring loaded casters retract under user's weight.
Non-marring floor caps grip floor for stable stationary positioning.



TILT & ROLL

shown with optional 20" deep top steps



# OF STEPS INCLUDING TOP STEP	HEIGHT INCHES		SPRING LOADED CASTER MODEL #	TILT & ROLL MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL				
16" WIDE STEPS						
1 STEP NO RAILS	12	12	SS1N*	-	18 x 20	24
2 STEP NO RAILS	19	19	SS2N*	-	20 x 19	28
3 STEP NO RAILS	28.5	28.5	SS3N*	-	20 x 25	35
2 STEP	19	49	SS220	SSTR220	20 x 19	40
3 STEP	28.5	58.5	SS320	SSTR320	20 x 25	46
4 STEP	40	73	SS420	SSTR420	20 x 38	70
5 STEP	50	83	SS520	SSTR520	20 x 44	77
6 STEP	60	93	SS624	SSTR624	24 x 50	81
7 STEP	70	103	SS724	-	24 x 56	95
24" WIDE STEPS						
2 STEP NO RAILS	19	19	SS2N30*	-	30 x 19	40
3 STEP NO RAILS	28.5	28.5	SS3N30*	-	30 x 25	44
2 STEP	19	49	SS230	SSTR230	30 x 19	43
3 STEP	28.5	58.5	SS330	SSTR330	30 x 25	55
4 STEP	40	73	SS430	SSTR430	30 x 38	85
5 STEP	50	83	SS530	SSTR530	30 x 44	92
6 STEP	60	93	SS630	SSTR630	30 x 50	105
7 STEP	70	103	SS730	-	30 x 56	115

* Eligible for UPS. Tilt and roll casters add 5" to base length

STAINLESS STEEL FOLD-N-STORE LADDERS

are bead-blasted to provide smooth uniform finish and feature 16" wide steps.



Large 10" Rubber Wheels

FOLD-N-STORE

STEPS INCLUDING TOP STEP	BASE W" X L"	WGT Lbs.	MODEL #
5 STEP	30 x 48	82	SSFAWL-5
6 STEP	30 x 54	92	SSFAWL-6
7 STEP	30 x 60	103	SSFAWL-7
8 STEP	30 x 66	118	SSFAWL-8
9 STEP	30 x 72	133	SSFAWL-9
10 STEP	30 x 78	149	SSFAWL-10
11 STEP	30 x 84	165	SSFAWL-11
12 STEP	30 x 90	180	SSFAWL-12

* Fold-N-Store Capacity = 350 Lbs.

STEPS INCLUDING TOP STEP	HEIGHT INCHES		BASE W" x L"	WGT Lbs.	LOCKSTEP MODEL #
	TOP STEP	OVER ALL			
16" WIDE STEPS					
5 STEP	50"	83"	24 x 46	95	SS052414
6 STEP	60"	93"	24 x 52	105	SS062414
7 STEP	70"	103"	24 x 58	114	SS072414
8 STEP	80"	113"	24 x 64	132	SS082414
24" WIDE STEPS					
5 STEP	50"	83"	32 x 46	113	SS053214
6 STEP	60"	93"	32 x 52	126	SS063214
7 STEP	70"	103"	32 x 58	147	SS073214
8 STEP	80"	113"	32 x 64	165	SS083214
9 STEP	90"	123"	32 x 70	180	SS093214
10 STEP	100"	133"	32 x 76	199	SS103214
11 STEP	110"	143"	32 x 82	211	SS113214
12 STEP	120"	153"	32 x 88	227	SS123214

Lockstep Ladder shown with perforated tread Built to OSHA and ANSI



NOTE: Stainless Steel ladders subject to a 50% restocking charge

BALLYMORE SAFETY



- Height = 52in
- Folded Length = 14in
- Expanded Length = 12ft
- Weight = 31 lbs


MODEL #
SAFETY GATE-Y

STEEL

SAFETY BARRICADE GATE

- Both versions have the capability to close down aisles from a few feet up to 12 feet wide.
- They have bracket sets that can attach to different types of uprights.
- The Fiberglass version is flexible and less susceptible to damage if struck by equipment.
- The gate colors can be customized for your operation to provide high visibility.
- We have the ability to add signage with specific safety messaging.
- Gates have adjustable leading edge rollers to support the gate as it extends

- Height = 48in
- Folded Length = 10in
- Expanded Length = 12ft
- Weight = 30lbs

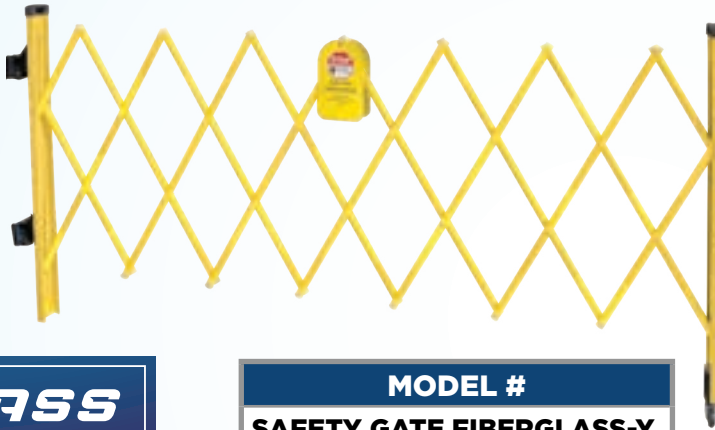

FIBERGLASS

MODEL #
SAFETY GATE FIBERGLASS-Y



Gate Only - Barrier Not Included



U-GATE SELF-CLOSING SAFETY GATE

- **16" - 40" adjustability; no additional parts required**
- Mounts to square or round tubing up to 1.5" diameter
- Opens either inward or outward
- Mounts on left-hand or right-hand side
- Aluminum construction
- Powder-coated yellow finish

MODEL #	Gate Width	Gate Height	Overall Width	Weight
SGR-UAG	16" to 40"	25.25"	18.25" to 42.25"	18



ALUMINUM LADDERS

- **350 LB. CAPACITY**
- All welded
- Aluminum mill finish, industrial grade welds
- Ideal for use in banks, libraries & hospitals and wash down applications
- Lightweight design
- Non-magnetic and non-sparking
- Paint-free for food and pharmaceutical applications
- Solid ribbed tread or heavy duty serrated grating
- 10" standard deep top step
- Optional 20" & 30" deep top step
- Complies with applicable OSHA & ANSI standards



Corrosion Resistant • Light Weight • Aluminum Rolling Ladders

Aluminum ladders are lightweight, weather resistant, durable & easy to transport, with noncorrosive properties that make them the ideal choice for many applications in both outdoor and indoor environments.

Specify Tread Type when Ordering:

- Ribbed Tread (R)
- Heavy Duty Serrated Grating (G)

# OF STEPS INCLUDING TOP STEP	Height Inches		SPRING LOADED CASTERS MODEL #	TILT & ROLL MODEL #	BASE W" x L"	WGT Lbs
	TOP STEP	OVER ALL				
18" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S*	-	20 x 19	15
3 STEP NO RAILS	28.5	28.5	A3S*	-	20 x 25	20
4 STEP NO RAILS	38	38	A4S	-	20 x 31	29
2 STEP	19	49	A2SH	A2SH-TR	20 x 19	21
3 STEP	28.5	58.5	A3SH	A3SH-TR	20 x 25	27
4 STEP	38	68	A4SH	A4SH-TR	20 x 31	34
24" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S30*	-	30 x 19	22
3 STEP NO RAILS	28.5	28.5	A3S30*	-	30 x 25	28
4 STEP NO RAILS	38	38	A4S30	-	30 x 31	35
2 STEP	19	49	A2SH30	A2SH30-TR	30 x 19	28
3 STEP	28.5	58.5	A3SH30	A3SH30-TR	30 x 25	34
4 STEP	38	68	A4SH30	A4SH30-TR	30 x 31	41
5 STEP	47.5	77.5	A5SH30	A5SH30-TR	30 x 37	49
6 STEP	57	87	A6SH30	A6SH30-TR	30 x 43	60
7 STEP	66.5	96.5	A7SH30	A7SH30-TR	30 x 49	67

* Eligible for UPS. Tilt and roll casters add 5" to base length.
NOTE: Aluminum ladders are subject to a 50% restocking charge

NEW! ALUMINUM LOCK-N-STOCK

- **300 LB. CAPACITY**
- Welded Construction
- Perforated Tread
- No hinge to break
- Easy to maneuver in the open or closed position
- Locks in the folded or climbing position
- Approx 10" deep when folded and 14" deep on 10" deep top step models
- Complies with applicable OSHA & ANSI standards
- Blue powder coat finish



POPULAR LOCK-N-STOCK - NOW AVAILABLE IN ALUMINUM

The feature is the drastically reduced weight. The benefit is less effort to maneuver the ladder leading to better productivity. Two Versions: a 7" deep top step with 22" high handles and a 10" deep top step with 30" high handles along with a rear guardrail. Lock the ALUMINUM stair section in place and **CLIMB IT- ROLL-IT- FOLD IT AND STORE IT!!**

MODEL #	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WEIGHT LBS.	OPEN WIDTH & LENGTH	FOLDED SIZE	COLOR
ALS3247	3	28.5"	23	24 x 23	10 x 24 x 52	BLUE
ALS4247	4	38"	28	24 x 30	10 x 24 x 65	BLUE
ALS32410	3	28.5"	26	24 x 28	14 x 24 x 62	BLUE
ALS42410	4	38"	31	24 x 35	14 x 24 x 73	BLUE



ALUMINUM LADDERS

- **350 LB. CAPACITY**
- Solid Ribbed, Perforated or Grip Strut tread
- 3/4" Sch. 40, 1-1/16" O.D. pipe
- Standard mill finish
- Spring-loaded caters 2-7 step models
- Step lock 8-12 models
- Complies with applicable OSHA & ANSI standards



Perforated Tread (6)



Ribbed Tread (4)


MODEL #	# of Steps	Overall Height	Platform W x L	Base W x D	Weight
16" Top Step					
WLAR102165	2	52	16" x 14"	20" x 23"	27
WLAR103165	3	62	16" x 14"	22" x 31"	33
WLAR104165	4	72	16" x 14"	22" x 37"	39
WLAR105165	5	82	16" x 14"	22" x 44"	43
WLAR106165	6	92	16" x 14"	26" x 51"	50
WLAR107165	7	102	16" x 14"	26" x 57"	56
24" Top Step					
WLAR102245	2	52	24" x 14"	29" x 23"	32
WLAR103245	3	62	24" x 14"	29" x 31"	35
WLAR104245	4	72	24" x 14"	32" x 37"	45
WLAR105245	5	82	24" x 14"	32" x 44"	50
WLAR106245	6	92	24" x 14"	24" x 14"	57
WLAR107245	7	102	24" x 14"	32" x 57"	64
WLAR108245	8	112	24" x 14"	36" x 66"	80
WLAR109245	9	122	24" x 14"	36" x 72"	87
WLAR110245	10	132	24" x 14"	36" x 79"	93
WLAR111245	11	142	24" x 14"	38" x 86"	100
WLAR112245	12	152	24" x 14"	38" x 92"	112

Note: Models Shown are for Grip Strut




DEEP TOP STEP ALUMINUM ROLLING LADDERS

- **350 LB. CAPACITY**
- Solid Ribbed, Perforated or Grip Strut tread
- 3/4" Sch. 40, 1-1/16" O.D. pipe
- Standard mill finish
- Spring-loaded caters
- 2-7 step models
- Step lock 8-12 models
- Complies with applicable OSHA & ANSI standards



Perforated Tread (6)



Ribbed Tread (4)

# of Steps	Overall Height	Platform W x L	Base W x D	MODEL #	Weight	MODEL #	Weight
				28" Deep Top Step		21" Deep Top Step	
16" Step Width							
2	52	16" x 14"	20" x 23"	WLAR102165-D5*	27	WLAR102165-D4	24
3	62	16" x 14"	22" x 31"	WLAR103165-D5*	33	WLAR103165-D4	30
4	72	16" x 14"	22" x 37"	WLAR104165-D5*	39	WLAR104165-D4	36
5	82	16" x 14"	22" x 44"	WLAR105165-D5	48	WLAR105165-D4	45
6	92	16" x 14"	26" x 51"	WLAR106165-D5	50	WLAR106165-D4	52
7	102	16" x 14"	26" x 57"	WLAR107165-D5	56	WLAR107165-D4	58
24" Step Width							
2	52	24" x 14"	29" x 23"	WLAR102245-D5*	32	WLAR102245-D4	28
3	62	24" x 14"	29" x 31"	WLAR103245-D5*	35	WLAR103245-D4	31
4	72	24" x 14"	32" x 37"	WLAR104245-D5*	45	WLAR104245-D4	41
5	82	24" x 14"	32" x 44"	WLAR105245-D5	50	WLAR105245-D4	51
6	92	24" x 14"	24" x 14"	WLAR106245-D5	57	WLAR106245-D4	58
7	102	24" x 14"	32" x 57"	WLAR107245-D5	64	WLAR107245-D4	65
8	112	24" x 14"	36" x 66"	WLAR108245-D5	80	WLAR108245-D4	81
9	122	24" x 14"	36" x 72"	WLAR109245-D5	87	WLAR109245-D4	85
10	132	24" x 14"	36" x 79"	WLAR110245-D5	93	WLAR110245-D4	94
11	142	24" x 14"	38" x 86"	WLAR111245-D5	100	WLAR111245-D4	101

Note: Models Shown are for Grip Strut
*Models available with no handrails.

ALUMINUM WHEEL BARROW STYLE LADDERS



Aluminum wheelbarrow style ladders provide lightweight lift & roll portability for easy maneuvering



300 Lb. Capacity!



- **300 LB. CAPACITY**
- **Industrial-grade welds**
- **14" deep top step standard**
- **Complies with applicable OSHA & ANSI standards**
- **Lightweight lift & roll portability for easy maneuvering**
- **10" rear rubber wheel-rolls on rough surfaces**
- **Nonmagnetic, non-sparking & paint-free**

TYPICAL END USE:

- **Libraries • Hospitals • Banks**
- **Universities • Educational Facilities**

STEPS INCLUDING TOP STEP	HEIGHT INCHES			18" WIDE TREAD		24" WIDE TREAD *	
	TOP STEP	OVER ALL	BASE W" X L"	MODEL #	WGT Lbs.	MODEL #	WGT Lbs.
5 STEP	50"	83"	30 x 47	ALWB5	42	ALWB530	50
6 STEP	60"	93"	30 x 53	ALWB6	50	ALWB630	60
7 STEP	70"	103"	30 x 60	ALWB7	58	ALWB730	70
8 STEP	80"	113"	36 x 66	ALWB8	66	ALWB830	80
9 STEP	90"	123"	36 x 72	ALWB9	74	ALWB930	90
10 STEP	100"	133"	36 x 78	ALWB10	82	ALWB1030	100

*Models with 24" wide steps have 36" wide base

California OSHA-compliant ladders are available

CUSTOM VERTICAL ACCESS SOLUTIONS

Ballymore works with customers to engineer and manufacture custom vertical access solutions to meet unique requirements.


Don't see exactly what you need for your application? Contact Ballymore to explore a custom solution to meet your requirements.

Call Toll Free: 800-762-8327



HEAVY DUTY INDUSTRIAL CROSSOVERS

- Three Piece Construction: two stair sections & one bridge
- Heavy 1 1/4" schedule 40 pipe structural frame & rails
- Standard tread: expanded metal or serrated grating (Optional solid steel tread with abrasive mat on bridge available to avoid debris falling onto conveyors)
- Full rails, midrails and toeboards
- Stairway slope allows easier climbing and descent
- Gray powder coat finish
- Each stair section has four legs with large, pre-drilled plates to bolt to the floor
- Available in alternate configurations: U-Shape, Z-Shape, L-Shape, etc.

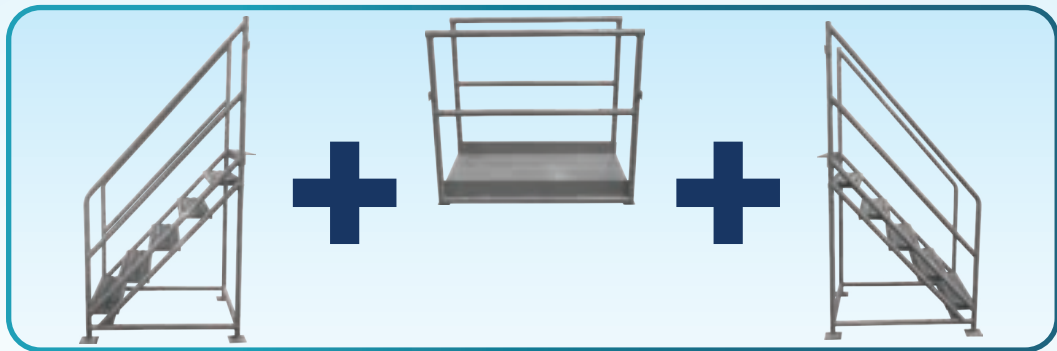


STAIR + BRIDGE = CROSSOVER

STAIR SECTIONS (Set of 2) FOR INDUSTRIAL CROSSOVERS							
2 to 7 Steps... with choice of widths							
# of Steps Each Section	Vertical Clearance Inches	27" Overall Width (Expanded Metal)		31 1/2" Overall Width (Serrated Grating)		38 1/2" Overall Width (Serrated Grating)	
		MODEL #	WEIGHT	MODEL #	WEIGHT	MODEL #	WEIGHT
2	28	CS227	253	CS231	254	CS238	276
3	38	CS327	310	CS331	325	CS338	351
4	48	CS427	378	CS431	393	CS438	428
5	58	CS527	445	CS531	465	CS538	505
6	68	CS627	517	CS631	537	CS638	583
7	78	CS727	600	CS731	630	CS738	680

BRIDGE SECTIONS FOR INDUSTRIAL CROSSOVERS							
Combine any length with appropriate width stair sections							
Length in Inches	Horizontal Clearance Inches	27" Overall Width (Expanded Metal)		31 1/2" Overall Width (Serrated Grating)		38 1/2" Overall Width (Serrated Grating)	
		MODEL #	WEIGHT	MODEL #	WEIGHT	MODEL #	WEIGHT
20	18	-CB227	88	-CB231	95	-CB238	102
30	28	-CB327	111	-CB331	120	-CB338	128
40	38	-CB427	133	-CB431	140	-CB438	153
50	48	-CB527	156	-CB531	165	-CB538	180
60	58	-CB627	195	-CB631	203	-CB638	220

NOTE: For complete model designation use model # prefix for pair of stair sections from "Stair Sections" table, plus model # suffix from "Bridge Sections" table. (i.e., CS327-CB227).

BALLYMORE SAFETY

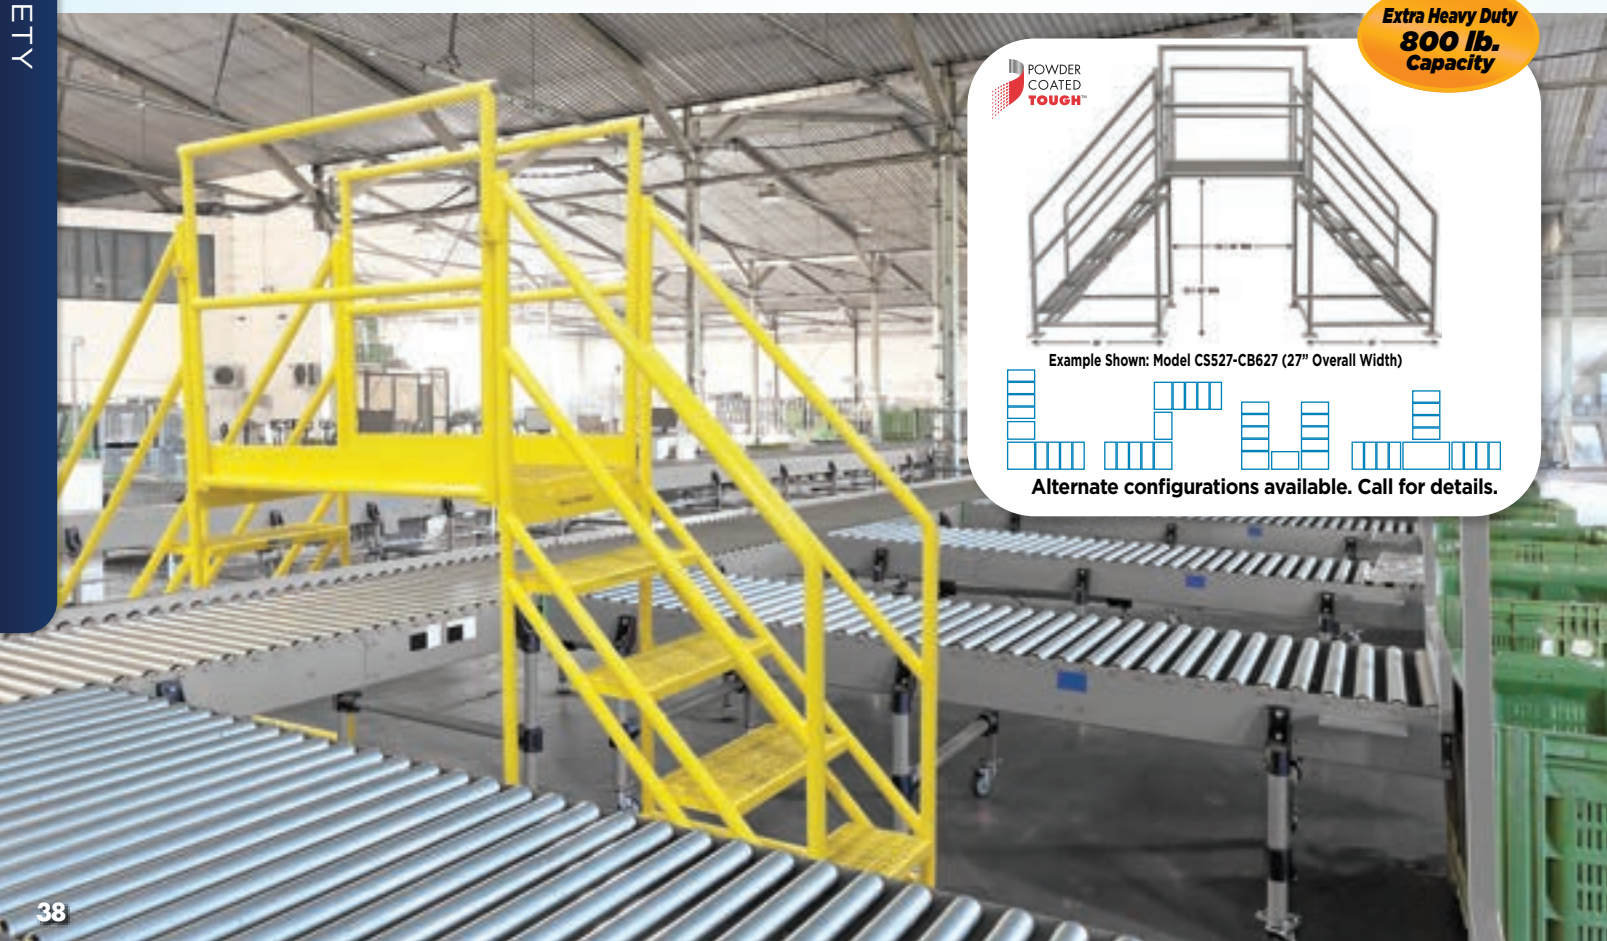

Extra Heavy Duty
800 lb.
Capacity

POWDER COATED TOUGH

Example Shown: Model CS527-CB627 (27" Overall Width)

Alternate configurations available. Call for details.



Cantilever Ladders • Heavy Duty Construction for Heavy Duty Applications!

The cantilever series of steel rolling ladders by Ballymore is the ideal solution for working or performing maintenance in elevated areas that are difficult to access. The cantilever is designed to be highly maneuverable and engineered for safety. Each cantilever is safety tested to ensure it will provide a safe elevated working environment.

CANTILEVER SERIES LADDERS

• 300 LBS. CAPACITY

Higher weight capacities available - call for details.

800-762-8327

- 59 degree slope
- Heavy-duty 1" x 2" rectangular frame
- High quality 5" x 2" locking casters
- Available with Rear Guardrail removed for easy walk through
- Powder coat finish
- Ships KD to prevent freight damage and lower freight cost

SPECIAL PURPOSE LADDER AS DEFINED BY ANSI-14.7

BASE FRAME AND REAR VERTICAL RUGGED 2" x 1"



STANDARD GRAY FINISH



Add platform overhang length to model number when ordering



				14" OVERHANG		28" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6	60"	57"	CL-6	493	32 x 46	735	32 x 53
7	70"	67"	CL-7	467	32 x 52	695	32 x 52
8	80"	77"	CL-8	437	32 x 58	665	32 x 58
9	90"	87"	CL-9	405	32 x 65	583	32 x 65
10	100"	97"	CL-10	426	32 x 71	554	32 x 71
11	110"	107"	CL-11	430	32 x 77	569	32 x 77
12	120"	117"	CL-12	409	32 x 84	537	32 x 84
13	130"	127"	CL-13	442	40 x 90	520	40 x 90
14	140"	137"	CL-14	475	40 x 96	553	40 x 96
15	150"	147"	CL-15	458	40 x 103	536	40 x 103
				35" OVERHANG		42" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6	60"	57"	CL-6	763	32 x 60	791	32 x 67
7	70"	67"	CL-7	773	32 x 59	801	32 x 66
8	80"	77"	CL-8	779	32 x 58	807	32 x 65
9	90"	87"	CL-9	697	32 x 65	811	32 x 65
10	100"	97"	CL-10	668	32 x 71	782	32 x 71
11	110"	107"	CL-11	633	32 x 77	747	32 x 77
12	120"	117"	CL-12	601	32 x 84	715	32 x 84
13	130"	127"	CL-13	634	40 x 90	698	40 x 90
14	140"	137"	CL-14	617	40 x 96	681	40 x 96
15	150"	147"	CL-15	600	40 x 103	664	40 x 103

VERSASTEP



Versatility

- **2 in 1**

Versa-Step's OneStair system enables the stairway to be configured as either a 2-step or 3-step model for OSHA compliant models and 3-step or 4-step model for both CAL-OSHA and MASS. compliant models.

- **Max Adjust**

Versa-Step's PerfAdjust legs offer minimum adjustability, making it easier to position the platform flush with the threshold of the building door. Additionally, the stair stringer adjustability provides the ability to level the stringer on uneven surfaces.

Functionality

- Versa-Step's functionality makes it very quick and simple to set up, position flush against the door threshold and attach to the trailer.

- Versa-Step's unique modular leg and foot pad design ensures preservation of each PerfAdjust leg for future field applications even when disassembly occurs in the most difficult ground surface conditions.uneven surfaces.

Model #	Description
TAVSO23-AS	2 & 3 Step OSHA Compliant Model
TAVSM34-AS	3 & 4 Step MASS. Compliant Model
TAVSC34-AS	3 & 4 Step CAL-OSHA Compliant Model



L-DESIGN

CONFIGURABLE LADDERS

Configure. Customize. Construct

Start with a basic ladder



Add a Deep Top Kit



Add an All-directional Kit



Add a Stock Picking Kit



U-DESIGN

CONFIGURABLE LADDERS

Configure a steel rolling ladder exactly how you want it by choosing from the feature kits including the deep top kit, the all-directional kit and the stock picking kit. Combine features to build the most productive ladder for your needs.



Perforated Tread (6)



Grip Strut (2)



U-DESIGN CUSTOMIZABLE LADDERS



- 450 LB. CAPACITY
- 24" wide steps
- 7" deep treads (56° models)
- 10" deep platform (56° models)
- 17" deep platform (50° models)
- 8.5" deep treads (56° models)
- Step-lock standard on all models
- Powder-coated gray finish
- Ships unassembled
- Complies with applicable OSHA & ANSI standards

STANDARD ANGLE BASE LADDER							
MODEL #	# of Steps	Platform Height	Overall Height	Step Width	Platform W x L	Base W x D	Weight
UKDSR106246	6	60"	102	24'	24" x 10"	35" x 50"	201
UKDSR107246	7	70"	112	24'	24" x 10"	35" x 57"	245
UKDSR108246	8	80"	122	24'	24" x 10"	35" x 64"	281
UKDRS109246	9	90"	132	24'	24" x 10"	35" x 69"	306
UKDRS110246	10	100"	142	24'	24" x 10"	35" x 76"	320
UKDRS111246	11	110"	152	24'	24" x 10"	35" x 83"	352
UKDRS112246	12	120"	162	24'	24" x 10"	35" x 90"	377
UKDSR113246	13	130"	172	24'	24" x 10"	40" x 96"	405
UKDSR114246	14	140"	182	24'	24" x 10"	40" x 103"	425
UKDSR115246	15	150"	192	24'	24" x 10"	40" x 110"	521

Models Shown are for Perforated Treads

SAFETY ANGLE BASE LADDER							
MODEL #	# of Steps	Platform Height	Overall Height	Step Width	Platform W x L	Base W x D	Weight
UKDEC106246	6	60"	102	24'	24" x 17"	35" x 66"	201
UKDEC107246	7	70"	112	24'	24" x 17"	35" x 74"	245
UKDEC108246	8	80"	122	24'	24" x 17"	35" x 82"	281
UKDEC109246	9	90"	132	24'	24" x 17"	35" x 91"	306
UKDEC110246	10	100"	142	24'	24" x 17"	35" x 99"	320
UKDEC111246	11	110"	152	24'	24" x 17"	35" x 107"	352
UKDEC112246	12	120"	162	24'	24" x 147"	35" x 116"	377
UKDEC113246	13	130"	172	24'	24" x 17"	40" x 124"	405
UKDEC114246	14	140"	182	24'	24" x 17"	40" x 132"	425
UKDEC115246	15	150"	192	24'	24" x 17"	40" x 141"	521

Models Shown are for Perforated Treads

DEEP TOP PLATFORM KIT	
MODEL #	Description
UP20DTK	Adds 10" additional length to top platform (Standard: 20" or Safety Angle: 27" Total)
UP30DTK	Adds 20" additional length to top platform (Standard: 30" or Safety Angle: 37" Total)

ALL-DIRECTION MANEUVERABILITY KIT		
MODEL #	KIT MATCHING	DESCRIPTION
U4AD0612	6-12 Step Models	Enables the ladder to turn within its own radius
U4AD1315	13-15 Step Models	

STOCK PICKING SHELF KIT		
MODEL #	KIT MATCHING	DESCRIPTION
USPK2	6-7 Step Models	2 - 50 lb. Capacity Shelves
USPK3	8-15 Step Models	3 - 50 lb. Capacity Shelves

Also available in Serrated Tread

L-DESIGN

CONFIGURABLE LADDERS

HEAVY DUTY INDUSTRIAL CROSSOVERS

EXTRA HEAVY DUTY 1,000 lbs Capacity

- Combine 20" or 30" Bridge spans to create desired horizontal clearance
- Leg kit required for spans greater than 90" in length
- Rail Kit item URK used in place of ladder to close off platform opening


1. Select an incline



2. Select a stair height

3. Select a bridge span

4. Select a configuration

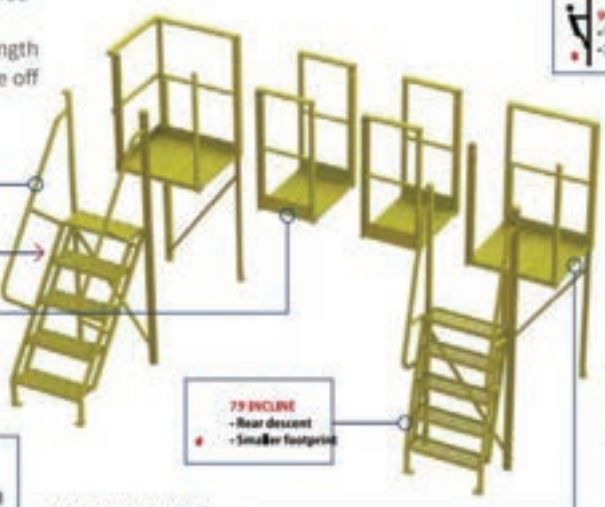

LADDER OPTIONS

MODEL #	# of Steps	Step Width	Step Depth	Platform Height	Overall Height	Base Width	Vertical Clearance	Weight
50 Incline								
UCL5003246	3	24"	10"	30"	72"	26.5"	28"	128
UCL5004246	4	24"	10"	40"	82"	26.5"	38"	144
UCL5005246	5	24"	10"	50"	92"	26.5"	48"	200
UCL5006246	6	24"	10"	60"	102"	26.5"	58"	226
UCL5007246	7	24"	10"	70"	112"	26.5"	68"	254
UCL5008246	8	24"	10"	80"	122"	26.5"	78"	281
UCL5009246	9	24"	10"	90"	132"	26.5"	88"	308
75 Incline								
UCL7503246	3	24"	7"	30"	72"	26.5"	28"	160
UCL7504246	4	24"	7"	40"	82"	26.5"	38"	140
UCL7505246	5	24"	7"	50"	92"	26.5"	48"	190
UCL7506246	6	24"	7"	60"	102"	26.5"	58"	210
UCL7507246	7	24"	7"	70"	112"	26.5"	68"	240
UCL7508246	8	24"	7"	80"	122"	26.5"	78"	248
UCL7509246	9	24"	7"	90"	132"	26.5"	88"	276
90 Incline								
UCL9003246	3	24"	2.5"	30"	72"	30"	28"	104
UCL9004246	4	24"	2.5"	40"	82"	30"	38"	117
UCL9005246	5	24"	2.5"	50"	92"	30"	48"	156
UCL9006246	6	24"	2.5"	60"	102"	84"	58"	168
UCL9007246	7	24"	2.5"	70"	112"	84"	68"	184
UCL9008246	8	24"	2.5"	80"	122"	84"	78"	193
UCL9009246	9	24"	2.5"	90"	132"	84"	88"	214

Models Shown are for Perforated Treads



Perforated Tread (6)



Grip Strut (2)

BRIDGE SPAN OPTIONS

Platform Length	Platform Width	Handrail Height	Overall Height	MODEL #
20"	24"	42"	44"	UCB20242
30"	24"	42"	44"	UCB30246

Models Shown are for Perforated Treads

SUPPORT LEG OPTIONS

Overall Height	Overall Width	MODEL #
30"	24"	ULK0324
40"	24"	ULK0424
50"	24"	ULK0524
60"	24"	ULK0624
70"	24"	ULK0724
80"	24"	ULK0824
90"	24"	ULK0924



TURN PLATFORM OPTIONS

Platform Height	Platform Width	Vertical Clearance	Overall Height	MODEL #
30"	24"	28"	72"	UCT03246
40"	24"	38"	82"	UCT04246
50"	24"	48"	92"	UCT05246
60"	24"	58"	102"	UCT06246
70"	24"	68"	112"	UCT07246
80"	24"	78"	122"	UCT08246
90"	24"	88"	132"	UCT09246

Models Shown are for Perforated Treads

TRI-ARC LADDER DIVISION

U-DESIGN

CONFIGURABLE LADDERS



Unsupported Cantilever

- Platform heights from 50" (5 step) to 90" (9 step)
- Cantilevered platform is available up to 40" long
- Counterweighted for a 300 lb. capacity

Supported Cantilever

- Same features as the Unsupported Cantilever
- Support leg rolls under obstructions like tanks, trucks, or machines
- Allows cantilevered access without added counterweight



U-DESIGN CANTILEVER SERIES LADDERS

- 300 lb. rated capacity
- 24" wide steps & platform
- Powder-coated yellow finish
- Meets OSHA 1910.29 & ANSI A14.7

PERFORATED						
MODEL #	Platform Height	Clear Height (to floor)	Overall Height	Platform W x L	Base W x D	Weight
20" Cantilever Length						
SUPPORTED						
UCS500520246	50"	48"	92"	24" x 20"	41" x 64"	296
UCS500620246	60"	58"	102"	24" x 20"	41" x 72"	362
UCS500720246	70"	68"	112"	24" x 20"	41" x 81"	350
UCS500820246	80"	78"	122"	24" x 40"	41" x 89"	426
UCS500920246	90"	88"	132"	24" x 40"	41" x 97"	449
UNSUPPORTED						
UCU500520246	50"	48"	92"	24" x 20"	30" x 64"	619
UCU500620246	60"	58"	102"	24" x 20"	30" x 72"	575
UCU500720246	70"	68"	112"	24" x 20"	30" x 81"	606
UCU500820246	80"	78"	122"	24" x 20"	30" x 89"	769
UCU500920246	90"	88"	132"	24" x 20"	30" x 117"	602
30" Cantilever Length						
SUPPORTED						
UCS500530246	50"	58"	102"	24" x 30"	41" x 82"	320
UCS500630246	60"	58"	102"	24" x 30"	41" x 82"	388
UCS500730246	70"	68"	112"	24" x 30"	41" x 91"	419
UCS500830246	80"	78"	122"	24" x 30"	41" x 99"	452
UCS500930246	90"	88"	132"	24" x 30"	41" x 107"	475
UNSUPPORTED						
UCU500530246	50"	48"	92"	24" x 30"	30" x 74"	797
UCU500630246	60"	58"	102"	24" x 30"	30" x 82"	673
UCU500730246	70"	68"	112"	24" x 30"	30" x 91"	704
UCU500830246	80"	78"	122"	24" x 30"	30" x 99"	647
UCU500930246	90"	88"	132"	24" x 30"	30" x 107"	680
40" Cantilever Length						
SUPPORTED						
UCS500540246	50"	48"	92"	24" x 40"	41" x 64"	356
UCS500640246	60"	58"	102"	24" x 40"	41" x 92"	410
UCS500740246	70"	68"	112"	24" x 40"	41" x 101"	435
UCS500840246	80"	78"	122"	24" x 40"	41" x 109"	476
UCS500940246	90"	88"	132"	24" x 40"	41" x 117"	491
UNSUPPORTED						
UCU500540246	50"	48"	92"	24" x 40"	30" x 84"	893
UCU500640246	60"	58"	102"	24" x 40"	30" x 92"	839
UCU500740246	70"	68"	112"	24" x 40"	30" x 101"	800
UCU500840246	80"	78"	122"	24" x 40"	30" x 109"	743
UCU500940246	90"	88"	132"	24" x 40"	30" x 97"	776

GRIP STRUT						
MODEL #	Platform Height	Clear Height (to floor)	Overall Height	Platform W x L	Base W x D	Weight
20" Cantilever Length						
SUPPORTED						
UCS500520242	50"	48"	92"	24" x 20"	41" x 64"	306
UCS500620242	60"	58"	102"	24" x 20"	41" x 72"	362
UCS500720242	70"	68"	112"	24" x 20"	41" x 81"	350
UCS500820242	80"	78"	122"	24" x 20"	41" x 109"	426
UCS500920242	90"	88"	132"	24" x 20"	41" x 97"	449
UNSUPPORTED						
UCU500520242	50"	48"	92"	24" x 20"	30" x 64"	619
UCU500620242	60"	58"	102"	24" x 20"	30" x 72"	575
UCU500720242	70"	68"	112"	24" x 20"	30" x 81"	606
UCU500820242	80"	78"	122"	24" x 20"	30" x 89"	769
UCU500920242	90"	88"	132"	24" x 20"	30" x 117"	602
30" Cantilever Length						
SUPPORTED						
UCS500530242	50"	48"	92"	24" x 30"	41" x 74"	272
UCS500630242	60"	58"	102"	24" x 30"	41" x 82"	388
UCS500730242	70"	68"	112"	24" x 30"	41" x 91"	419
UCS500830242	80"	78"	122"	24" x 30"	41" x 99"	452
UCS500930242	90"	88"	132"	24" x 30"	41" x 107"	475
UNSUPPORTED						
UCU500530242	50"	48"	92"	24" x 30"	30" x 74"	797
UCU500630242	60"	58"	102"	24" x 30"	30" x 82"	673
UCU500730242	70"	68"	112"	24" x 30"	30" x 91"	704
UCU500830242	80"	78"	122"	24" x 30"	30" x 99"	647
UCU500930242	90"	88"	132"	24" x 30"	30" x 107"	680
40" Cantilever Length						
SUPPORTED						
UCS500540242	50"	48"	92"	24" x 40"	41" x 64"	356
UCS500640242	60"	58"	102"	24" x 40"	41" x 92"	410
UCS500740242	70"	68"	112"	24" x 40"	41" x 101	435
UCS500840242	80"	78"	122"	24" x 40"	41" x 109"	476
UCS500940242	90"	88"	132"	24" x 40"	41" x 117"	491
UNSUPPORTED						
UCU500540242	50"	48"	92"	24" x 40"	30" x 84"	893
UCU500640242	60"	58"	102"	24" x 40"	30" x 92"	839
UCU500740242	70"	68"	112"	24" x 40"	30" x 101"	800
UCU500840242	80"	78"	122"	24" x 40"	30" x 109"	743
UCU500940242	90"	88"	132"	24" x 40"	30" x 97"	776




MULTI-PLATFORM ACCESS SYSTEM

The Multi-Platform Access System (MPAS) allows you to design your own complete platform and ladder configuration to suit any application where work is being done at height. The platform components can be used together for more width or length. You can create a custom multi-tiered system by using the various ladder and stair components available. The versatility of the platforms' ability of being connected to any other component truly gives you the multi-platform access options!

Features:

- Aluminum construction
- Unpainted mill finish
- 500 lb. capacity
- 81" maximum height for all configurations
- Clearance height is 4" less than platform height
- Serrated slip-resistant tread
- Assembly hardware included
- Floor mounting hardware not included (3/8" mounting hardware)

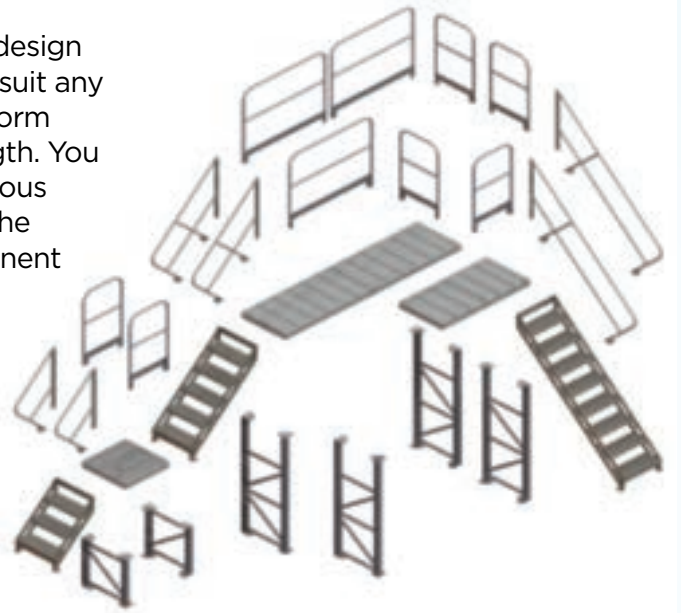

Create a customized aluminum multi-height platform system, crossover ladder or work stand by using any combination of the five components.

Stairway Ladder Handrails

- Fastens to left or right side of stairway ladders
- Must be ordered to match stairway ladder height

Guardrails

- 30" & 60" available
- 42" top rail height
- 4" kick plate
- Guardrails can be added

Stairway Ladder

- 45° incline
- 24" wide steps
- 9" height increments between stairs
- 18" - 81" height range
- Handrails sold separately
- Support legs not required
- Requires mounting to floor surface

Platforms

- 30" width
- 30", 60", 90" or 120" length platforms
- Each platform section requires support legs
- Fastens to stairway ladders, guardrails & legs

Platform Support Legs

- Clears obstructions 14" - 77"
- 9" height increments
- Requires mounting to floor surface
- Required to match platform height
- 1 on each end of platform unit

STAIRWAY LADDERS - 45° INCLINE							
MODEL #	# Of Steps	Top Step Height	Clearance Height	Step Width	Overall Height	Overall Width	Overall Depth
MPASSW2	1	18"	14"	24"	18"	29"	10"
MPASSW3	2	27"	23"	24"	27"	29"	19"
MPASSW4	3	36"	32"	24"	36"	29"	28"
MPASSW5	4	45"	41"	24"	45"	29"	37"
MPASSW6	5	54"	50"	24"	54"	29"	46"
MPASSW7	6	63"	59"	24"	63"	29"	55"
MPASSW8	7	72"	68"	24"	72"	29"	64"
MPASSW9	8	81"	77"	24"	81"	29"	73"



STAIR UNIT RAILS		
MODEL #	For Stair Unit	Railing Height
MPASHR2	MPASSW2	36.5"
MPASHR3	MPASSW3	36.5"
MPASHR4	MPASSW4	36.5"
MPASHR5	MPASSW5	36.5"
MPASHR6	MPASSW6	36.5"
MPASHR7	MPASSW7	36.5"
MPASHR8	MPASSW8	36.5"
MPASHR9	MPASSW9	36.5"



PLATFORM UNITS		
MODEL #	Length	Width
MPASP30	30"	30"
MPASP60	60"	30"
MPASP90	90"	30"
MPASP120	120"	30"



PLATFORM SUPPORTING LEGS	
MODEL #	For Platform Height
MPASST2	18"
MPASST3	27"
MPASST4	36"
MPASST5	45"
MPASST6	54"
MPASST7	63"
MPASST8	72"
MPASST9	81"



PLATFORM GUARDRAILS		
MODEL #	Length	Height
MPASGR30	30"	42"
MPASGR60	60"	42"




ROOFTOP PLATFORMS

Easily create safe access over pipes and other rooftop obstacles.

Special support feet distribute weight to prevent damage to roof membranes.

A rooftop platform allows you to easily create safe access over pipes and other rooftop obstacles. Special support feet distribute weight to prevent damage to roof membranes. You can select the parts needed to create your own specially configured U-Design rooftop platform by following the steps below.

TRI-ARC LADDER DIVISION

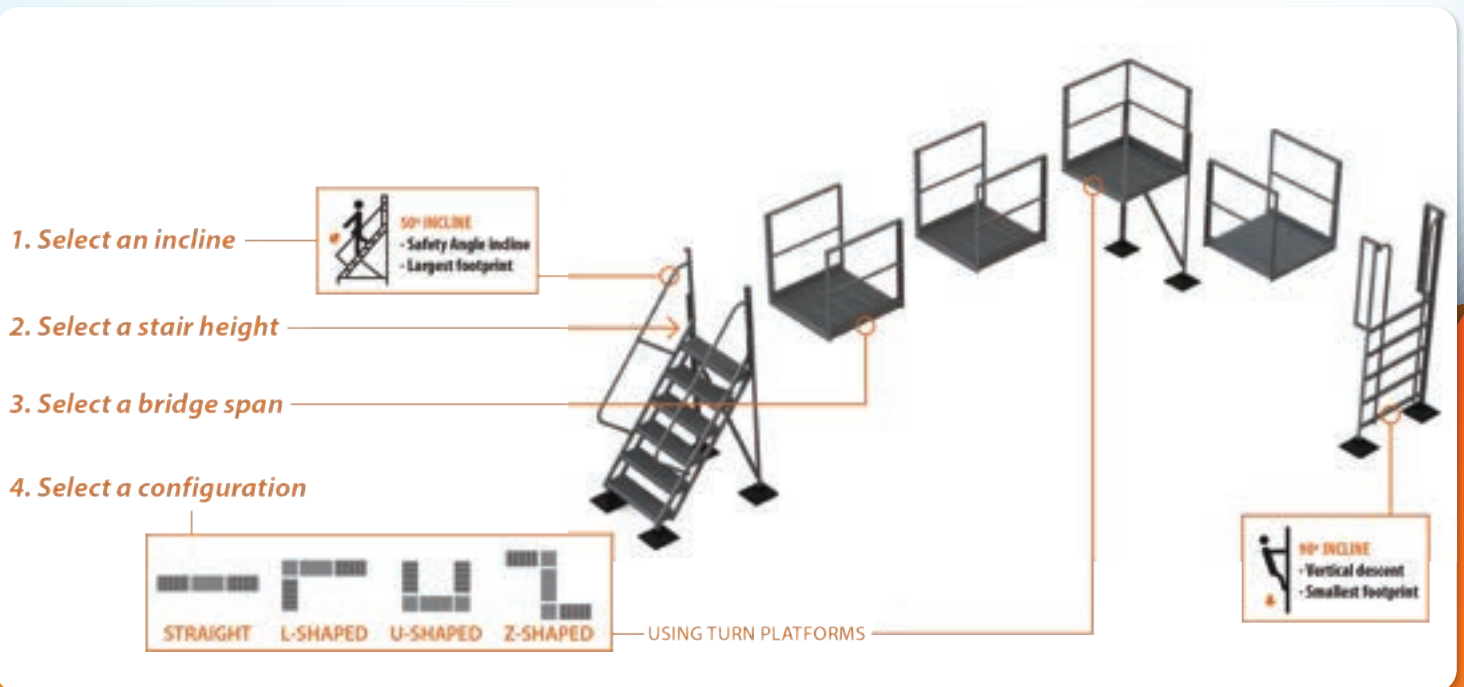


See pg. 48 for product configurator.

URTL505



URTL903



LADDER							
MODEL #	# Of Steps	Top Step Height	Vertical Clearance	Step Width	Step Depth	Overall Height	Overall Width
50° Incline							
URTL502	1	20"	17.5"	36"	9.5"	62"	46.25"
URTL503	2	30"	27.5"	36"	9.5"	72"	52.75"
URTL504	3	40"	37.5"	36"	9.5"	82"	52.75"
URTL505	4	50"	47.5"	36"	9.5"	92"	52.75"
URTL506	5	60"	57.5"	36"	9.5"	102"	52.75"
90° Incline							
URTL902	-	20"	17.5"	24"	1.625"	62"	52.25"
URTL903	-	30"	27.5"	24"	1.625"	72"	52.25"
URTL904	-	40"	37.5"	24"	1.625"	82"	52.25"
URTL905	-	50"	47.5"	24"	1.625"	92"	52.25"
URTL906	-	60"	57.5"	24"	1.625"	102"	52.25"

URTSB36



URTPP60




URTRK1



URTSL40



URTOS3636



ROOFTOP PLATFORMS

- 500 lb. rated capacity
- Aluminum, 1"x2" rectangular tube construction
- Clearance height is 2.5" less than platform height
- 36" wide steps and bridge spans
- Serrated tread surface
- Non-Penetrating Caddy feet - distributes weight evenly to protect roof surface
- 42" guardrail height
- 40" long bridge span that can be combined to create up to 120" uninhibited clearance length

BRIDGE SPAN							
MODEL #	Span Length	Walkway Width	Overall Width	Combine up to a total of 120" uninhibited span clearance length. Longer spans require Support Legs			
URTSB36	40"	38"	42"				
TURN PLATFORM							
MODEL #	For Step Sizes	Platform Height	Vertical Clearance	Platform Width	Overall Height	Overall Width	Platform Length
URTPP20	2	20"	17.5"	36"	62"	52.75"	40"
URTPP30	3	30"	27.5"	36"	72"	52.75"	40"
URTPP40	4	40"	37.5"	36"	82"	52.75"	40"
URTPP50	5	50"	47.5"	36"	92"	52.75"	40"
URTPP60	6	60"	57.5"	36"	102"	52.75"	40"
GUARDRAIL ENCLOSURE							
URTL902	-	20"	17.5"	24"	1.625"	62"	52.25"
MODEL #	Kit includes guardrail, mid-rail, toeboard and hardware to close any walkway opening. Must be paired with a Leg Kit.						
URTRK1							
LEG KIT							
MODEL #	For Step Sizes	Use a Leg Kit when overall bridge length must be greater than 120". Pick based on number of steps and place between Bridge Spans so that no span exceeds 120" between Ladders, Turn Platforms, or Leg Kits.					
URTSL20	2						
URTSL30	3						
URTSL40	4						
URTSL50	5						
URTSL60	6						

LEG KIT	
MODEL #	36" x 36" serrated platform with adjustable height from 11" to 14". Platform is 3" thick aluminum construction, with a capacity of 500 lbs.
URTOS3636	Platforms may be combined together to create a larger walking surface, but CANNOT be joined to the crossover components above.

Design your custom ladder system here.



Scan the QR code to begin designing your custom layout using our 3-D Configurator rendering system.

U-Design Configurable Products are an innovative way to more effectively and efficiently identify, select and then purchase the most suitable ladder model for your climbing and access needs, while receiving a custom solution at an off-the-shelf price.

Our Configurator Program allows you to easily design, edit and order your custom ladder system.

U-DESIGN
CONFIGURABLE PRODUCTS

Components in Configuration

Tri-Arc Part #	Quantity	Description
UHTL00	1	8 Step 50" Ladder
UHTS00	4	47" Bridge Span
UHTPS0	1	Turn Platform

TRIARC
We Are The Experts In Climbing and Access

Click Anywhere and Drag to Move the Ladder System

ADJUSTABLE HEIGHT MOBILE LADDER

- **500 lb. rated capacity**
- Steps articulate as height adjusts
- 50" - 90" and 80" - 120" range models
- Powered and manual models
- Diamond plate platform performance
- Serrated 11-3/4" deep steps
- 42" guardrails
- Removable chains on right & left guardrails
- 8" x 2" locking casters
- Hybrid aluminum & steel construction
- Complies with applicable OSHA & ANSI standards



TRI-ARC LADDER DIVISION

ADJUSTABLE HEIGHT MOBILE LADDER							
MODEL #	For Step Sizes	Adjustment Range	Overall Height Range	Stowed Height	Platform W x L	Overall Width	Overall Length
ALS5090-M	9	50" - 90"	92" - 132"	94"	24" x 48"	48"	147"
ALS80120-M	12	80" - 120"	122" - 162"	122"	24" x 48"	48"	178"
SHOP AIR HYDRAULIC PUMP							
ALS5090-A	9	50" - 90"	92" - 132"	94"	24" x 48"	48"	147"
ALS80120-A	12	80" - 120"	122" - 162"	122"	24" x 48"	48"	178"



Adjustable Height Cantilevered Platforms provide safe access to Tank Trucks, Railroad Cars, Conveyor Systems, Machinery or other applications with limited access.

**MANUALLY PROPELLED
TANK TOP
ADJUSTABLE HEIGHT
WORK PLATFORM**

• 300 LB. CAPACITY

OPTIONAL ACCESSORIES:

- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle
- Removable 30" extension rail optional (Shown)
- Safety Orange Powder Coat Optional
- For outdoor applications primer undercoat and powder coat finish is recommended.

**SPECIAL PURPOSE
LADDER AS DEFINED
BY ANSI-14.7**

FEATURES:

- 9' to 13' adjustable work height
- Provides easy access to tank trucks, railroad cars & other cantilevered applications
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises & lowers cantilevered platform
- Open serrated grating steps and deck tread.
- Slip resistant climbing rungs
- 28"W x 60"L base, fixed outriggers spread to 69"
- Full rails on both sides, gates at each end of platform
- 2 swivel & 2 rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Fixed platform height available
- Gray powder coat finish (Standard)

**SHOWN WITH
OPTIONAL SAFETY
ORANGE
FINISH & 30"
EXTENSION
RAILING**



**TANK
TOP
RAISES TO ADJUST
TO THE HEIGHT OF
YOUR WORKING
NEEDS**

**Custom
Engineered Vertical
Access Solutions
Available**



TANK TOP ADJUSTABLE HEIGHT WORK PLATFORM						
MODEL #	Platform Max	Height Min	Platform Length	Platform Width	Underclearance Height	Weight Lbs.
TT-913	13' 8"	9' 4"	48"	24"	Adjustable 9' to 13'	1525
TT-913F	13' 8"	9' 4"	48"	24"	Non-Adjustable 9'to 13'	1450
TT-7-11	11' 8"	7' 4"	48"	24"	Adjustable 7' to 11'	1450
TT-11-15	15' 8"	11' 4"	48"	24"	Adjustable 11' to 15'	1625



BALLYMORE SAFETY



THIN LINE LADDER

The Tilt and Roll feature allows the ladder to roll easily in either the folded or climbing position. Hang it when not in use. The ladder is only 3" thick when folded and fits under most shelving and racking. The 50 degree slope with 7" intermediate steps and 10" deep top step provides a comfortable safe climb. The "Thin Line" series ships flat in a corrugated box to reduce freight expenses and eliminates freight damage. Ships ready for use, no assembly required.



- **300 LB. CAPACITY**
- Made out of strong and durable, heavy duty 1" square tubing
- Complies with applicable OSHA & ANSI standards• No assembly required
- Less than 4" thick when folded
- Ships via UPS in a box to eliminate freight damage
- Rolls easily in the open or closed position
- 50° slope for easy climbing
- Standard finish is powder coat blue

MODEL #	STEPS	TOP STEP HEIGHT	FOLDED DIMENSIONS	OPEN W" X L"	WEIGHT LBS.
TL218	2	20"	3 X 21 X 41	21 X 26	22
TL318	3	30"	3 X 21 X 52	21 X 32	31
TL418	4	40"	3 X 21 X 64	21 X 38	42

Ballymore introduces the heavy duty merchandise ladder cart with a capacity of 1,000 lbs. The cart has two large shelves for transporting a variety of merchandise. Ladder portion has a spring loaded device which secures the ladder to the floor when climbing and retracts for easy maneuvering. Cart is equipped with 4 casters- 2 swivels and 2 rigid for effortless turning and moving. Durable powder coated gray with yellow steps.

MERCHANDISE LADDER CART



- **1000 LB. CAPACITY**
- Base Dimensions= 21"x 51"
- * Overall Height= 63"
- Steps= 3 with Abrasive Mat
- Top Shelf Height= 28"
- Top Shelf Dimensions= 20" Wide by 40" Long
- Bottom Shelf Dimensions= 20" Wide by 45" Long
- Casters= 4 - 2 swivels and 2 rigid
- Weight = 108 lbs.

MODEL # BMLC



It's here! Ballymore's latest product - a perfectly designed patent pending Heavy Duty Paint Cart. The new paint cart makes transporting a 5 gallon container quicker and less stressful on the back and shoulders.



PAINT CARTS

- Features:**
- **400 LB. CAPACITY**
 - Base = 20" Wide X 27" Long
 - Shelf - 20" Wide X 20" Long
 - Overall Height 42"
 - Four Heavy Duty Casters (2 swivel, 2 rigid)
 - Weight = 62 lbs.
 - Ships Assembled
 - Colors Available In Orange or Blue



MODEL # BPCRT-O



MODEL # BPCRT-B

Not Just For Paint Containers!



BALLYMORE LIFTS!

DRIVING INNOVATION TO NEW HEIGHTS





FEATURES:

- All models now include a larger 24"x32" cargo deck
- 12 volt DC power (AGM battery) with mounted charger included - Easily recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for safety
- 100+ raise and lower cycles between charges
- Key lock prevents unauthorized use
- Optional sensing system creates a 2' safety zone around lift alerting operator of activity below lift
- Complies with applicable OSHA & ANSI standards

The ideal lift for the shop, stock room or retail floor!



No Outriggers Required. Floor Locks Secure Power Stacker Safely in Place!



MANUALLY PROPELLED HYDRAULIC POWER STOCKER LIFTS

NEW HIGHER CAPACITY PS-10

- 650 LB. CAPACITY (PS-10)
- 650 LB. CAPACITY (PS-12 AND PS-15)

With this ground entry, manually propelled, hydraulic order picker merchandise can be raised to shelf level and easily slid on or off shelf to minimize lifting, improving productivity and employee safety. It's easy to operate and ideal for retail storerooms and stockrooms.

Power Stacker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



MODEL #	WORKING HEIGHT	MERCH DECK HEIGHT (MAX)	STANDING PLATFORM HEIGHT (MAX)	CARGO PLATFORM DIMENSIONS	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-10	15'	10'	9'	24" x 32"	43" x 54"	76"	12V DC	1,231
PS-12*	18'	13'	12' 2"	24" x 32"	42" x 54"	94"	12V DC	1,331
PS-15*	21'	15'9"	14'	24" x 32"	43" x 60"	90"	12V DC	1,434

* Available with optional sensing system



INNOVATION DRIVEN TO NEW HEIGHTS

DRIVABLE POWER STOCKER LIFTS

• **650 LB. CAPACITY**
(Operator & Inventory)

*No Outriggers
Required. Floor Locks
Secure Power Stocker
Safely in Place!*

Power Stocker's optional sensing system creates a safety zone perimeter around the lift when in the raised position.



FEATURES:

- Large Cargo Deck 32"(Wide)X 28"(Deep)
- Standing Platform 28"(Wide)X 17"(Deep)
- Power Cord for charging
- Easy charging using standard 110V outlet
- Key Lock prevents unauthorized usage
- Ground and Control Box Operations
- Two Speeds
- Comes in orange or blue
- Manual Lowering Valve
- Saloon door gates at entrance
- Horn
- ANSI Approved

Our Drivable Power Stocker, Model Number PS-12D and PS-15D, has all the ergonomic features and benefits as our pushable models, including ground entry and the ability to raise merchandise to shelf levels while easily sliding the product on or off the shelf. This minimizes the back strains of lifting and at the same time improves productivity and safety.

The Drivable Power Stocker is easy to operate. The control joystick makes navigation simple and safe. The Drivable Power Stockers have two speeds and can be operated in the raised position. They come with a Gate Safety Alarm, Manual Lowering Valve, Warning Lights plus Emergency Stop Buttons - all Standard!

MODEL #	WORKING HEIGHT	MERCH DECK MAX HEIGHT	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-12D*	18'	13'	42"X 60"	96"	2-12V	1,600
PS-15D*	20'	14' 10"	43"X65"	90"	2-12V	1,675

* Available with optional sensing system

Ballymore's mini scissor lift work platforms are uniquely engineered for easy use and maneuverability in narrow aisles and tight access areas. It's the perfect lift for one man maintenance jobs in high, hard to reach areas, providing safe vertical access to working heights up to 19'



MINI SCISSOR LIFT

PUSHABLE MODELS

Mini Scissor Lifts are manufactured from durable, heavy duty steel. Safety features include top and mid rail guards with a hinged gate for easy and safe access. Platform includes toe guards to prevent slips and falls.

NO OUTRIGGERS REQUIRED!

*Floor Locks secure lift safely to the floor.
Small footprint enables easy access to limited access areas*

- **500 LB. CAPACITY**
- Manually Propelled
- Working heights up to 19'
- Maximum raised platform height of 9' 10" to 12' 9"
- 28" x 50" Platforms
- Easy to roll on 6" casters
- 12 Volt DC Powered
- Power Unit stored in a lockable slide out drawer
- Battery charge indicator is included
- Emergency stop button
- Emergency lowering system
- Forklift Pockets
- Complies with applicable OSHA & ANSI standards*
- Designed for indoor use

MODEL #	WORKING HEIGHT	PLATFORM MAX.	PLATFORM MIN.	FOOTPRINT W"x L"	OVERALL HEIGHT (LOWERED)	WEIGHT LBS
MSL-10	16'	9' 10"	26"	30" x 57"	77"	1,200
MSL-12	19'	12' 9"	26"	30" x 57"	77"	1,260

THE MINI MERCHANDISE LIFT

**Footprint only 26"W X 53"L
Great for tight aisle ways!**

Features

- Shelf Lip to prevent packages from falling off the front of the lift
- Safety Control Panel- 3 button plus Kill Switch
- Manual Lowering Valve
- Limit Switch included. This prevents the lift from ascending without the casters being locked to the floor.
- "Push" handles added to the front and back of the lift for easy maneuverability
- Safety shield to prevent access to internals
- Enlarged Standing Platform for added safety and comfort
- Saloon Door Gate
- Bubble Level
- Meets ANSI Standards



MODEL #BMML-9

THE MINI MERCHANDISE LIFT (BMML-9)

- **500LB. CAPACITY**
- Base = 26" Wide X 53" Long - (60" overall length including push rails)
- Merchandise Shelf = 25" Wide X 17" Long
- Overall Height = 55"
- Fully Lowered Standing Platform = 13"
- Standing Platform = 23^{1/2}" Wide X 26" deep
- Wheels - 4- 6" diameter
 - 2 - 2" Wide Locking Swivels
 - 2 - 2" Wide Rigid Wheels
- Shelf Height Maximum = 110"
- Standing Platform Maximum Height = 70"
- Color Yellow
- Power - 12V
- Weight = 840 lbs Approximate
- Shelf Capacity - 150lbs (tested)
- Complies with applicable OSHA & ANSI standards
- Designed for indoor use





DISCOVER BALLYMORE'S NEWEST 2 OCCUPANT DRIVABLE SCISSOR LIFTS

INNOVATION DRIVEN TO NEW HEIGHTS

DRIVABLE SCISSOR LIFTS

Features:

- Platform slide out extension deck
- Drivable at full heights
- Self-locking safety gate
- Emergency stop button
- Emergency lowering system
- Forklift pockets
- Powder coat finish
- DMSL-10 & DMSL-12
- Complies with applicable OSHA & ANSI standards

Featuring An Extendable Roll Out Cantilever Platform

The roll-out cantilevered platform provides safer access to machinery and equipment.



Gradeability



0° Turn Radius



NEW MINI DRIVABLE 19'



Model #	Weight Capacity	Working Height	Platform Height		Platform W x L (Outer Dimension)	Platform Extension	Base W x L	Overall Height	Weight (lbs)	Power - Batteries
			Max	Min						
DMSL-10	500	16'	10'	36"	28" x 50"	22"	30" x 57"	80"	1825	2 - 12V
DMSL-12	500	18'	12'	36"	28" x 50"	22"	30" x 57"	80"	1900	2 - 12V
DMSL-19	500	25'	19'	42"	29" x 66"	36"	30" x 74"	86"	3164	4 - 6V
DMSL-19C*	500	25'	19'	42"	28" x 53"	24"	32" x 60"	83"	2733	2-12V
DMSL-26	500	32'	26'	48"	32" x 90"	36"	32" x 98"	92"	4718	4 - 6V
DMSL-26(W)	1000	32'	26'	48"	44" x 90"	36"	46" x 98"	92"	4884	4 - 6V
DSL-32	700	38'	32'	48"	44" x 90"	36"	46" x 98"	96"	5533	4 - 6V
DSL-40	550	46'	40'	58"	44" x 90"	36"	47" x 98"	102"	6834	4 - 12V
DSL-45	500	51'	45'	58"	44" x 104"	36"	55" x 112"	102"	7320	4 - 12V

* Indoor Use Only

**Working heights
to 35'**



**300 lb.
Capacity**

MOBILE VERTICAL SINGLE PERSON LIFT

- Manually propelled maintenance lift
- Working heights to 35'
- Compact design for easy storage
- 29x56 base allows lift to roll through standard doorways
- Easy to use outriggers extend from base to provide excellent stability
- 12 Volt DC Power (raise and lower)
- Complies with applicable OSHA & ANSI standards
- Designed for indoor use

MOBILE VERTICAL LIFT:

This manually propelled lift is designed for one worker and provides access to 35' working heights. Ideal for work on overhead lighting and ceiling maintenance. 12 Volt DC Power with easy to use controls allows the BMVL-30 to raise and descend smoothly and quietly. Compact design for easy storage and doorway passage. Outriggers swing easily into place to provide excellent stability. The BMVL-30 also includes a tilt and roll design to allow the lift to be easily transported from one job site to another.

MOBILE VERTICAL LIFT • MANUALLY PROPELLED LIFT							
MODEL #	WORKING HEIGHT	PLATFORM MAX	PLATFORM MIN	PLATFORM W" x L"	W" x L"	HEIGHT STOWED	WEIGHT
BMVL-30	35'	30'	10"	24" x 27"	29" x 56"	78"	1,040
ADDITIONAL INFORMATION							
<ul style="list-style-type: none"> • Outriggers included & attached • Outrigger footprint= 64"x74" 							

SAFETY:

For additional safety, outriggers include interlocks, which prevent the platform from being raised unless all four outriggers are in firm contact with the ground.





INNOVATION DRIVEN TO NEW HEIGHTS

DRIVABLE VERTICAL MAST LIFT (DVML-18)

Introducing a Drivable Version of the Ballymore Push-able Vertical Lift

- **330 LBS. CAPACITY**
- 42" handrails for additional safety
- Easy operating controls
- Platform slide out extension deck - standard
- Numerous Safety features including a Manual Lowering Valve, Emergency Stop Button, Automatic Pothole Protection
- Key Entry for controlled usage
- 2-12V Batteries that charge using a 110 volt outlet
- Fork Pockets for transportation
- Durable Orange Powder Coat
- Complies with applicable OSHA & ANSI standards

Ballymore's drivable vertical man lift is the optimal tool for your vertical access needs. Light weight and compact, the DVML-18 is ideal for increasing productivity on the worksite, warehouse, or stock picking environment. Equipped with user friendly controls and an on board diagnostic system, the DVML-18 can be maneuvered in even the most confined spaces.



IN STOCK



Model #	Working Height	Platform Height	W" X L"	Platform W x L (Outer Dimension)	Platform Extension	Weight
DVML-18 *	24'	18'	30" X 62"	24" X 25"	21"	2,430

* Indoor Use Only

BALLYMORE SAFETY

Ballymore's **NEW** Rebel-10 is the leader in versatility and safety in the material handling world. The drivable Rebel-10 will enhance productivity for any size stock room or DC center. With travel speeds up to 3 MPH, travel time and downtime between work areas will be reduced. The Rebel-10 elevates the worker and shelf for smoother and more efficient stocking and de-stocking operations. Associates will feel extra secure with surrounding deck rails and strong saloon (opening) doors. There is no chance of dangerous leaking hydraulic fluid as the lift is electric.



IN STOCK

POWDER COATED **TOUGH™**

- **Capacity personnel deck - 300 lbs**
- Load capacity upper merchandise deck - 200 lbs
- Load capacity lower merchandise deck - 250lbs
- Charging 110v outlet
- Color - Orange
- Saloon doors
- Two speeds- Turtle Drive Mode when the lift is in the raised position
- Travel speed up to 3 mph
- Wheels - 2 Drive wheels 12" x 2.5" and 2 wheels 10" x 2.5"
- Merchandise deck- 26.5" w x 21" L
- Standing Platform - 116"
- Horn
- Keyed ignition - prevents unauthorized Usage



Model #	Weight Capacity	Working Height	Overall Height	Merch Deck Max Height	Footprint L"xW"	Power	Weight (lbs)
Rebel-10	300*	16'	62"	154"	62" x 30"	2-12V	1,411

NEW

* Capacity personnel deck



BALLYLIFT ADJUSTABLE HEIGHT WORK PLATFORM

- **300 LB. CAPACITY**
- **Manually propelled maintenance lift providing working heights to 21' high**
- **Easy to use hydraulic hand pump**



FEATURES:

- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
 - Standard platform with steel deck (BL-315)
 - Cantilevered platform w/aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Powder coated gray finish
- Meets/exceeds ANSI safety standards



Ballylift Model # BL-315



Cantilevered platform extends 34" beyond base frame



Rolls thru standard doorway

BALLYLIFT • MANUALLY PROPELLED ONE WORKER LIFTS							
	MODEL #	PLATFORM MAX	PLATFORM MIN	PLATFORM LENGTH	PLATFORM WIDTH	WEIGHT LBS.	WORKING HEIGHT
Standard	BL-315	15'	6' 4"	20"	28"	590	21'
Cantilevered	BL-C14	14'	6' 4"	64"	20"	900	20'
OPTIONAL ACCESSORIES							
Tool Tray							
Fluorescent tube holder							
Platform duplex receptacle							

MR LIFTS TELESCOPING HYDRAULIC MAINTENANCE LIFTS

- **500 LB. COMBINED TWO PERSON CAPACITY**
- Working heights to 34'
- Two power options:
 - Convenient plug in 120V AC
 - Independent 12V DC deep cycle system with battery and charger
- Powder coated gray finish
- Complies with applicable OSHA & ANSI standards

MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS				
Model Number	Working Height	Platform Height Max	Platform Height Min	Weight Lbs.
MR-15-AC	21'	15'	6'4"	800
MR-15-DC	21'	15'	6'4"	930
MR-20-AC	25'	19'3"	6'4"	1,000
MR-20-DC	25'	19'3"	6'4"	1,130
MR-24-AC	30'	23'8"	6'7"	1,200
MR-24-DC	30'	23'8"	6'7"	1,330
MR-28-AC	34'	28'	6'10"	1,420
MR-28-DC	34'	28'	6'10"	1,550

FEATURES:

- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform
- Accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails & gate; 4" toeboards and non-slip deck
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces
- Overall height with rails folded is 16" above platform
- New design prohibits travelling through doorways



OPTIONAL ACCESSORIES

- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle



Shown with optional orange finish

BALLYMORE SAFETY

Heavy Duty Fork Deck



- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards & locking gate
- 60" high screen shields operator from fork lift mast
- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- 4" swivel casters on base for easy positioning
- Safety orange powder coat
- Ships boxed, easy assembly
- Available fully assembled

Extra Heavy Duty 1,000 Lb. Capacity!

POWDER COATED TOUGH

MODEL #	L" X W"	WEIGHT
FD-O-C	36" x 36"	141
FD-48-C	48" x 36"	163
FD-40-48	40" x 48"	171
OPTIONAL ACCESSORIES		
Fluorescent Bulb Caddy		26
Tool Tray (Bolt on or Hang on)		14

• Ships Boxed for Freight Savings & Quick, Easy Assembly

FORK DECK MAINTENANCE PLATFORM

- **1,000 lb. CAPACITY**
- Turn your fork truck into a personnel lift. Safe and economical access to heights above those reached by rolling ladders.
- CAL OSHA Models Available



FEATURES AND BENEFITS

- Powered in forward or reverse directions
- All in one Control Handle for steering, movement forward and reverse, and platform raising and lowering
- Heavy Duty Capacity - 1,500 lbs.
- Large Platform designed to address a wide variety of products
- Key Control Operation
- Fold Down Rails
- Safety Features including Emergency Stop Button
- Convenient 110 volt charging
- Extendable Side Rails
- Battery Power Indicator
- Built in Cycle Counter

POWDER COATED TOUGH

Easily load or unload heavy objects to dock levels or pickup truck bed heights!

PORTABLE LOADING DOCK

- **CAPACITY 1,500 LBS.**
- Platform Height- Ground Level to 55" high
- Platform Dimensions - 47" X 75"
- Weight - 2,178 lbs.
- Color - Safety Orange and Yellow
- Overall Base - 68" wide by 105" long
- Overall Height (fully lowered) - 44"
- Overall Height (fully raised) - 98"
- Two 12V Batteries
- 24V Drive Motor





IN STOCK for Immediate Availability

4 New Products to Choose From

13 Sizes to Choose From

6 Lithium Powered Products



PALLET PRODUCTS

More Lithium Options





Semi Electric Stacker with Adjustable Base Legs.
Single Mast with a Lift Height of 63"

FEATURES

- Forks adjust from side to side to accommodate skid widths
- Adjustable forks lower to the minimum height 2 1/8"
- Distance between fork 8 1/4" to 28 1/2" (Adjustable)
- Straddle legs adjust to three positions
- Sturdy mast made of rolled U- shapes
- Powerful lift motor 2.1 HP
- Battery gauge and On/Off switch
- Integrated 150 Ah maintenance free battery provides more than enough power to handle heavy duty lifting
- Integrated charger facilitates easy and reliable charging



POWDER COATED TOUGH™

BALLYPAL22AG63 STACKER

- Capacity= 2200 lbs.

New From Ballymore

In Stock For Immediate Availability

Semi Electric Stacker with Adjustable Base Legs.
Duplex Mast with a Lift Height of 138"

FEATURES

- Forks adjust from side to side to accommodate skid widths
- Adjustable forks lower to the minimum height 2 1/8"
- Distance between fork 8 1/4" to 28 1/4" (Adjustable)
- Straddle legs adjust to three positions
- Sturdy mast made of rolled U- shapes
- Powerful lift motor 2.1 HP
- Battery gauge and On/Off switch
- Integrated 150 Ah maintenance free battery provides more than enough power to handle heavy duty lifting
- Integrated charger facilitates easy and reliable charging



POWDER COATED TOUGH™

BALLYPAL22AG138 STACKER

- Capacity= 2200 lbs.

New From Ballymore

In Stock For Immediate Availability

MODEL #	WEIGHT CAPACITY	LIFT HEIGHT MAX	LIFT HEIGHT MIN	FORK LENGTH	FORK WIDTH	BASE LEGS (OD)	OVERALL LENGTH	OVERALL WIDTH	OVERALL HEIGHT	WEIGHT	POWER - BATTERIES
BALLYPAL22AG63	2200	63"	2 1/8"	42"	4"	44" TO 55"	66 1/2"	44" TO 55"	80"	830	1 X 12V
BALLYPAL22AG138	2200	138"	2 1/8"	42"	4"	44" TO 55"	66 1/2"	44" TO 55"	89 1/2"	1120	1 X 12V



Fully Electric Mono Mast & Dual Mast Entry Level Stackers

BALLYPAL22MSL63 ADJUSTABLE MONO MAST STACKER

- **Capacity= 2200 lbs.**
- Overall Fork Width 10" to 32" (Adjustable)
- Travel Speed = 2.3/2.5 mph
- Max Gradeability= 5% Laden and 10% Unladen



- FEATURES**
- Mono mast for maximum visibility
 - Built- in charger
 - Battery discharge indicator with lift lock out for improved battery life
 - 3 points design with centered drive for maximum stability and traction
 - Two Powerful 12Volt batteries
 - Straddle leg width range 46" x 58"

BALLYPAL22LSL138 ADJUSTABLE DUPLEX MAST STACKER

- **Capacity= 2200 lbs.**
- Overall Fork Width 10" to 32" (Adjustable)
- Travel Speed = 2.3/2.5 mph
- Max Gradeability= 5% Laden and 10% Unladen



- FEATURES**
- Duplex mast
 - Built- in charger
 - Battery discharge indicator with lift lock out for improved battery life
 - Adjustable straddle leg design for diverse pallet designs and improved stability
 - 3 points design with centered drive for maximum stability and traction
 - Two powerful 12Volt 85Ah batteries
 - Straddle leg width range 46" x 58"



MODEL #	WEIGHT CAPACITY	LIFT HEIGHT MAX	FORK LENGTH	FORK WIDTH	LOWERED MAST HEIGHT	FREE LIFT HEIGHT	EXTENDED MAST HEIGHT	HEIGHT OF TILLER IN DRIVE	HEIGHT LOWERED	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL22MSL63	2200	63"	45"	4"	77"	60"	97"	49" MAX	1.6"	71"	46" TO 58"	1,350	2 X 12V
BALLYPAL22LSL138	2200	138"	45"	4"	88"	135"	158"	49" MAX	1.6"	71"	46" TO 58"	1,655	2 X 12V
BALLYPAL35TSL157	3500	157"	45"	4.7"	75"	52"	176"	56" MAX	2"	82"	46" TO 58"	3,263	24V

BALLYPAL35TSL157 ADJUSTABLE STACKERS

- **Capacity= 3500 lbs.**
- Overall Fork Width 10" to 29" (Adjustable)
- Travel Speed = 3.5/ 3.7 mph
- Max Gradeability= 6% Laden and 12% Unladen



Fully Electric Straddle Leg Walkie Electric Stacker

- FEATURES**
- Proportional lifting allows for efficient and safe lifting of any product at any lift speed.
 - State of the art components
 - Mesh protection for safety as well as great visibility during operation
 - Robust chassis and thick apron protect the truck and its components
 - Three stage mast



Straddle Leg
Adjustable straddle leg design, suitable for diverse pallet sizes and more stability



Fully Electric Lithium Stacker with Adjustable Base Legs.

The newest technology lithium fully powered pallet stackers. Compact and light service weight, with high maneuverability. Fast charging and longer use lithium batteries. Integrated on-board 25A charger. Ideal for use on mezzanines. Turtle and regular speeds. Smart pin code access. On-board diagnostics. Able to drive while tiller is in the vertical position. Maintenance friendly with easy access.



POWDER COATED TOUGH™

LITHIUM BATTERY POWERED

BALLYPAL22NSL114 ADJUSTABLE LITHIUM STACKER

- Capacity= 2600 lbs.
- Battery = 24V / 60AH Lithium
- Duty Cycle per Charge = 4 Hours
- Straddle Legs O.D. = 46" to 58"
- Straddle Legs I.D. = 38" to 50"
- Load Center= 24"
- Travel Speed= 2.61/Laden-2.80 Unladen
- Overall Width= 47"
- Charger= 25AMP on board



Straddle Leg
Adjustable straddle leg design, suitable for diverse pallet sizes and more stability

Fully Electric Lithium Stacker with Adjustable Base Legs.

The newest technology lithium fully powered pallet stackers. Compact and light service weight, with high maneuverability. Fast charging and longer use lithium batteries. Integrated on-board 25A charger. Ideal for use on mezzanines. Turtle and regular speeds. Smart pin code access. On-board diagnostics. Able to drive while tiller is in the vertical position. Maintenance friendly with easy access.



POWDER COATED TOUGH™

LITHIUM BATTERY POWERED

BALLYPAL22NSL142 ADJUSTABLE LITHIUM STACKER

- Capacity= 2600 lbs.
- Battery = 24V / 60AH Lithium
- Duty Cycle per Charge = 4 Hours
- Straddle Legs O.D. = 46" to 58"
- Straddle Legs I.D. = 38" to 50"
- Load Center= 24"
- Travel Speed= 2.61/Laden-2.80 Unladen
- Overall Width= 47"
- Charger = 25AMP on board



Straddle Leg
Adjustable straddle leg design, suitable for diverse pallet sizes and more stability

MODEL #	WEIGHT CAPACITY (LBS)	LIFT HEIGHT MAX	FORK LENGTH	FORK WIDTH	BASE LEGS (OD)	OVERALL LENGTH	OVERALL WIDTH	OVERALL HEIGHT (LOWERED)	WEIGHT (LBS)	POWER - BATTERIES
BALLYPAL26NSL114	2600	114"	45"	4"	46" TO 58"	72"	47"	77"	1651	24V
BALLYPAL26NSL142	2600	142"	45"	4"	46" TO 58"	72"	47"	91"	1717	24V



Self Lifting Stacker - Designed to lift itself and pallet items into the bed of delivery vehicles

BALLYPAL SLS-54 Self Lifting STACKER



SPECIFICATIONS

- Capacity= 1,100 lbs
- Weight= 717 lbs
- Lift Height Max. = 54"
- Fork Length= 43"
- Fork Width= 6.3"
- Distance Between Forks = 21"
- Lowered Mast Height = 66"
- Overall Width 35"
- Overall Length= 63"
- Battery Voltage 1 x 12V

Controls are easily operated, from the ground level or truck bed.



MODEL # BALLYPAL SLS-54



Push pallet onto truck bed.

Raise unit off the ground.

Release the pin and pull out bottom forks.

Raise unit up to truck bed. Push in bottom forks and lock pin.

The unit can now be used/stored inside the truck.

Newest Technology Lithium Battery Powered Pallet Trucks - Electric Drive and Electric Lifting and Lowering



LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck

BALLYPAL33N-21 PALLET TRUCK

- **Capacity= 3300 lbs.**
- **Travel Speed = 2.85 Laden/2.98 Unladen mph**
- **Max Gradeability=5% Laden and 16% Unladen**
- **Battery Voltage 24V /20Ah Lithium**

Newest Technology Lithium Battery Powered Pallet Trucks - Electric Drive and Electric Lifting and Lowering



LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck

BALLYPAL33N-27 PALLET TRUCK

- **Capacity= 3300 lbs.**
- **Travel Speed = 2.85 Laden/2.98 Unladen mph**
- **Max Gradeability=5% Laden and 16% Unladen**
- **Battery Voltage 24V /20Ah Lithium**


MODEL #	WEIGHT CAPACITY	LIFT HEIGHT	HEIGHT OF TILLER IN THE DRIVE POSITION	HEIGHT LOWERED	FORK LENGTH	FORK WIDTH	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL33N-21	3300	4.5"	46" MAX	3"	45"	6.3"	60"	21"	271	24V
BALLYPAL33N-27	3300	4.5"	46" MAX	3"	45"	6.3"	60"	27"	278	24V



Newest Technology Lithium Battery Powered Pallet Trucks - Electric Drive and Electric Lifting and Lowering

BALLYPAL45N-21 PALLET TRUCK

- **Capacity= 4500 lbs.**
- **Travel Speed = 2.85 Laden/2.98 Unladen mph**
- **Max Gradeability=5% Laden and 16% Unladen**
- **Battery Voltage 48V /20Ah Lithium**

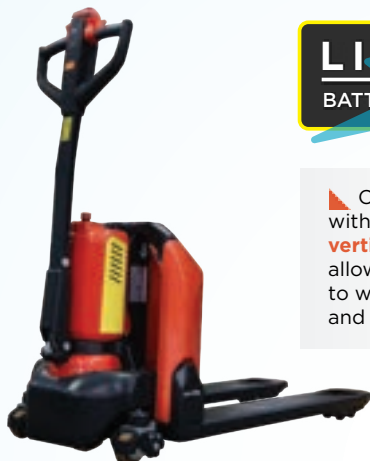

LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck

BALLYPAL45N-27 PALLET TRUCK

- **Capacity= 4500 lbs.**
- **Travel Speed = 2.85 Laden/2.98 Unladen mph**
- **Max Gradeability=5% Laden and 16% Unladen**
- **Battery Voltage 48V /20Ah Lithium**



LITHIUM
BATTERY POWERED

Can be operated with the tiller in the **vertical position**, allowing the operator to work in trailers and narrow aisles.

FEATURES

- Integrated pin control for authorized usage
- Emergency reverse and horn buttons
- Turtle Speed button
- Battery discharge indicator
- Operating hour counter
- On-board diagnostics and error codes
- Can be operated with tiller in the vertical position for work in confined areas
- Maintenance free lithium battery
- Quick charging and long-lasting battery can be charged in the truck

MODEL #	WEIGHT CAPACITY	LIFT HEIGHT	HEIGHT OF TILLER IN THE DRIVE POSITION	HEIGHT LOWERED	FORK LENGTH	FORK WIDTH	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL45N-21	4500	4.5"	46" MAX	3"	45"	6.3"	60"	21"	271	48V
BALLYPAL45N-27	4500	4.5"	46" MAX	3"	45"	6.3"	60.5"	27"	337	48V

BALLYPAL40L PALLET TRUCK

- **Capacity= 4000 lbs.**
- **Travel Speed = 3.1/3.3 mph**
- **Max Gradeability = 8% Laden and 12% Unladen**
- **Battery Voltage 24V /160Ah**

Heavy Duty Long Tiller Electric Pallet Truck

FEATURES

- Long tiller design
- High performance maintenance free AC Drive Unit
- Equipped with AC Drive Unit
- Higher ground clearance
- Built in charger
- Special design fork tips with 3 entry rollers and 4 exit rollers
- Creep Button
- Large capacity battery 160Ah

POWDER COATED TOUGH™



MODEL #	WEIGHT CAPACITY	LIFT HEIGHT	HEIGHT OF TILLER IN THE DRIVE POSITION	HEIGHT LOWERED	FORK LENGTH	FORK WIDTH	OVERALL LENGTH	OVERALL WIDTH	WEIGHT	POWER - BATTERIES
BALLYPAL40L	4000	4.7"	48" MAX	3"	48"	6.3"	68"	29"	913	24V

Semi-Powered Ball Transfer Conveyor Table

FEATURES

- This tool turns a lifting or lowering task into a lower risk push or pull.
- The tool allows an employee to slide product on or off a shelf anywhere from 12" high to 48" without lifting.
- Product can be rolled onto the table and rotated to the desired direction with ease.
- Smooth rolling casters. Pushing force on level concrete, when fully loaded =
- Can be used to assist in palletizing / depalletizing heavy product
- Key Controlled
- The balls retract automatically when the table is lowered to provide a secure surface or transport.
- Balls can be raised and lowered independently of the table height control if needed.



BALL TRANSFER TABLE

- **500 lbs Load Capacity**
- Table dimensions - 20" x 35" (leaves room in the aisle for customer to pass by)
- Table contains multi directional ball rollers
- The table height - from 12" to 48"
- Footprint - 21" x 53"
- Weight - 500 lbs
- Overall Height - 51" Lowered

Fully Powered Coming Soon



CONVEYOR TABLE

- **100 lbs Per Linear Foot**
- Approximately 63' when fully extended
- Omni-directional wheels allow travel in any direction
- Includes extra handle - The conveyor can be split into two sections for dual use
- Weight - 1,225 lbs
- Height ranges from from approx 26" to 42" fully extended
- Stacking sections provide compact storage footprint



CUSTOM VERTICAL ACCESS SOLUTIONS

Ballymore's custom design & fabrication capabilities can meet requirements for projects of all sizes & all types.

INNOVATION DRIVEN TO NEW HEIGHTS

Need a custom ladder, lift or platform?

We will engineer & fabricate to meet your requirements.

Need a custom vertical access solution? Let us work with you step-by-step on your custom application. We'll engineer and fabricate a custom ladder, lift or platform to meet your specific requirements in a quick and timely manner. Make your custom application a reality! Call Ballymore today: **800-762-8327**

CUSTOM ENGINEERED WORK PLATFORMS



CUSTOM LIFTS, PLATFORMS & LADDERS



BALLYMORE SAFETY

PLATFORMS, CROSSOVERS & LADDERS



CUSTOM VERTICAL ACCESS SOLUTIONS


Engineering Custom Vertical Access Solutions is our specialty! Call today to discuss your requirements.

CALL FOR PRICING: (800) 762-8327



For all of your custom lift, ladder & platform requirements call Ballymore.

- Special Rolling Ladders
- Unique Hydraulic Lifts
- Custom Folding Ladders
- Tailor-made Platforms
- Specialized Maintenance & Work Platforms
- Narrow Access
- Rolling Ladders
- Specialty Cantilever
- Rolling Ladders
- Self Propelled & Drivable Lifts
- And More!

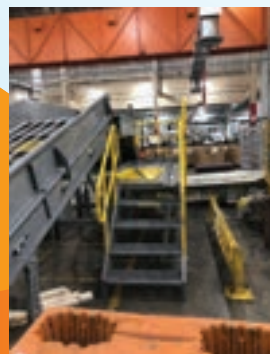



CUSTOM SAFETY DESIGNS

Tri-Arc's custom design & fabrication capabilities can meet requirements for projects of all sizes & all types.

Tri-Arc is the leading designer and manufacturer of platform fall protection systems in North America. Our EAS (Engineered Access Solutions) team is highly skilled at developing fixed wing and rotorcraft solutions for use in manufacturing, MRO and flight line environments. EAS provides complete turnkey solutions from design to installation and training of our high quality fall protection access solutions. Categories of aviation systems Tri-Arc designs and manufactures include Docking Systems, Phase Maintenance Platforms, Engine Access Stands, Flight Line Stands, Adjustable-Height Maintenance Platforms, Wing Access Stands and Aircraft Custom Solutions. Working from height in the aviation industry is an essential part of the manufacturing and MRO process. Tri-Arc's EAS division will customize a solution that successfully addresses OSHA compliance, safety, speed to completion and ergonomics.

Docking System Platforms

Docking systems are tailored to each application based on the type of work being performed and the aircraft being accessed.

Features

- Air and electric systems
- Multiple non-slip decking options
- Storage shelves and tool tray



CALL FOR PRICING: (800) 565-2165



Phase Maintenance Stands

Phase maintenance platforms are designed and manufactured to the highest specifications to cover all areas of aircraft maintenance on fixed wing and rotorcraft aircraft.

Features

- Sliders and deck extensions conform to aircraft
- Adjustable height platforms
- Removable and fold-down handrails
- Total lock swivel casters
- Anti-slip, anti-bounce safety tread



TRI-ARC LADDER DIVISION



Engine Access Stands

Engine access stands are engineered to provide safe access to all types of aircraft engine configurations.

Features

- Ergonomic leaning platform
- Protective bumper
- Industrial grade leveling jacks
- Integrated control system
- Versatile removable guardrails
- Total ease of mobility



Flight Line Stands

EAS flight line stands are designed to be mobile and versatile and can be configured to most fixed wing and rotorcraft aircraft.

Features


- Air and electric systems
- Storage shelves and tool tray
- Multiple non-slip decking options

Adjustable Heights Maintenance Stands

Phase maintenance platforms are designed and manufactured to the highest specifications to cover all areas of aircraft maintenance on fixed wing and rotorcraft aircraft.

Features

- Manual or powered hydraulics
- High capacity casters
- Locking slide out fingers
- Articulating ladder
- Redundant safety features
- Safety swing gates
- Optional fork truck pockets
- OSHA compliant
- Optional tool holders

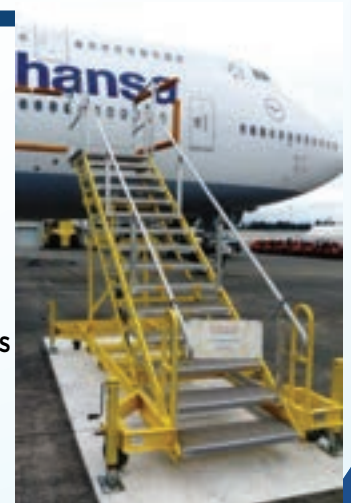

Wing Access Stands

Wing access stands provide safe access to all types of aircraft wing applications.

Features

- Collapsible guardrails
- Inclined to match wing surface
- Modular construction
- Air and electric set-up
- Multiple tow bars
- OSHA compliant






INJURY RISK ASSESSMENT WITH BALLYMORE'S ERGOVALUATOR



With the addition of a Certified Safety Professional to our staff, Ballymore is happy to offer assistance with problem solving related to safety issues that are resulting in back injuries for our customers. We have the ability to help safety professionals quantify the difference an intervention will make in terms of the reduction in the rate of back injuries related to a specific task.

Record a video, upload to our motion capture app, and capture risk in minutes.

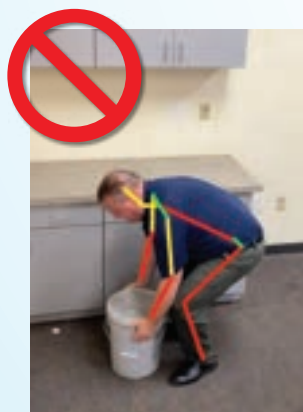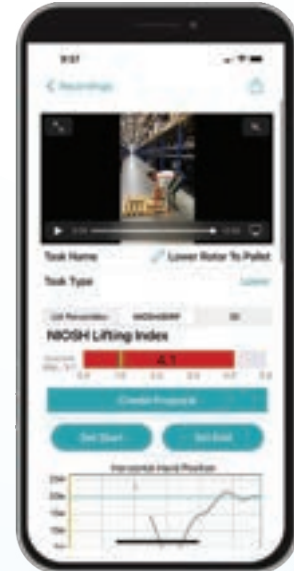

Fast. Simple. Insightful.

BALLYMORE SAFETY



Product Specifications are subject to change without notice. Please confirm critical product specifications at the time of ordering.

Inspection Procedure

Shipments are made FOB factory. Each product has been inspected before shipment. Consignee is responsible to inspect product at time of delivery and should refuse shipment or provide written notice to carrier upon receipt of damaged products.

Carriers and Ballymore will not accept claims if damage is not noted at the time of delivery.

Freight: Ship Prepaid and Add to take advantage of freight cost reductions with our carrier. Service Charge will be added Ballymore can provide estimated freight cost based upon our preferred carriers. Note: Cost are subject to change depending on fuel surcharges, special delivery requirements, etc. Ballymore will not be responsible for differences in freight estimates and actual freight costs.

On collect or 3rd party billing shipments, any freight claims must be handled by the customer, including refused shipments.

WARRANTY (ALL PRODUCTS INCLUDING LIFTS):

- A. Seller warrants goods manufactured by it to be from defects in material and workmanship for one (1) year following the date of shipment.
- B. Products, or component parts which may be sold by Seller but which are not manufactured by the Seller are not warranted by the Seller, but are sold only with the warranties, if any, of the manufacturers thereof
- C. Any warranty claim by the Buyer must be in writing, containing full and submitted to Seller within 15 days of when the cause of the claim first came to the Buyer's attention. The relevant product must be held intact by the Buyer to be available for inspection by Seller's staff, agents or representatives.
- D. All product returns require a return authorization prior to shipping (RMA). Returns related to a warranty claim will be accepted on the condition that should Seller, in its reasonable opinion, reject the claim, all costs directly incurred by Seller (including the cost of transport to and from the premises of Seller and inspection) will be paid by the Buyer.
- E. The decision to repair or replace any parts of the product will be made by Seller based on which approach will provide the Buyer with the best service.
- F. The liability of Seller for a breach of any express warranty in these terms and conditions, or breach of an implied warranty, condition or representations required by law to be provided, if any, is limited to (the choice of which is at the discretion of Seller). In the case of product:
 - i. replace the product or provide similar product; or
 - ii. repair the product; or
 - iii. pay to the Buyer the reasonable cost of replacing the product or acquiring an equivalent product; or
 - iv. pay the Buyer the reasonable cost of having product repaired; or
 - v. accept return of the product and refund the purchase price;
- G. To the full extent permitted by law, Seller shall not be held liable for any defects in the product which are the result of:
 - a. improper use or mismanagement of the product by the Buyer;
 - b. operation other than in accordance with the Seller's operating manual or official user supplements and bulletins supplied by Seller;
 - c. use of the product in a manner which is not reasonably contemplated by Seller;
 - d. use of the product with parts which have not been approved for use by Seller;
 - e. modification of the product in a manner not authorized by Seller;
 - f. subjection of the product to unusual or non-recommended conditions, physical, environmental or electrical stress;
 - g. reinstallation or moving of the product by a person other than Seller or a 3rd party approved by Seller;
 - h. the Buyer's failure to comply with any of these terms and conditions; or
 - i. the failure or refusal to install engineering changes or enhancements to the product recommended by Seller.
- H. Notwithstanding any other provision of these terms and conditions, to the full extent permitted by law. Seller shall not be liable to the Buyer for any indirect, consequential, incidental, punitive or special loss (including, without limitation, loss of profits, business, interest or anticipated savings) howsoever arising and whether caused by the negligence of Seller, its employees, agents and/or contractors.
- I. This warranty does not cover labor or other costs or expenses to remove or install any defective, repaired or replaced goods.

RETURN POLICY:

If for any reason Buyer is not satisfied with any standard product received from Seller, Buyer must advise Seller within 15 days of receipt of your order. All items to be returned must be authorized and assigned an RMA number by Seller. We will not accept any returns without a Seller issued RMA number. All returns must be in good condition, in the original packaging (or reasonable substitute) and prepaid within a 15-day period of RMA issue. A 20% -25% re-stocking fee will be applied to all standard items including lifts; 50% on aluminum and stainless. All modified items are non-returnable.

NON-REFUNDABLE ITEMS:

Custom or modified ladders, work platforms, crossovers, modified or custom lifts are non-refundable.

MINIMUM ORDER: \$15.00. Prepay and add shipments are subject to a service charge.

STEP UP TO **BALLYMORE**

PALLET TRUCKS AND STACKERS

13 sizes available of material handling stackers and trucks, including Lithium Powered models

PORTABLE LOADING DOCK

The Portable Loading Dock is ideal for loading or unloading heavy objects to dock levels or pickup truck bed heights.



PATENTED BOXED LADDER SYSTEM

Innovative, patented bolt-in top step design is engineered to allow ladders to ship boxed, reducing freight costs, minimizing risk of freight damage and increasing stocking efficiency.

PATENTED WEIGHT ACTUATED LOCKSTEP

The safest, most durable Lockstep on the market today. Patented design securely locks the ladder to the floor when just 70 lbs. is applied to any of the steps, providing increased safety.

MORE PRODUCTS = MORE SOLUTIONS

- **MORE** Component Ladder options to extend the life and utility of your ladders
- **MORE** Custom Engineered Ladder, Lift & Work Platform Innovations
- **MORE** Safety Designed Products and Options
- **MORE** Patented Vertical Access Solutions



BALLYMORE

231 W Stewart Huston Drive
Coatesville, PA 19320

501 Gunnard Carlson Drive
Coatesville, PA 19320

251 Waverly Blvd
Coatesville, PA 19320

390 Fountain St
Pittsburgh, PA 15668

412.826.8531 • 800.565.2165 • WWW.TRI-ARC.COM
610.593.5062 • 800.762.8327 • WWW.BALLYMORE.COM