


ANiDIG[®]
SYSTEMS

The logo features the word "ANiDIG" in a dark blue, serif font. The lowercase "i" and "i" are stylized with orange dots above them. A thin orange line with several orange dots connects the letters, resembling a circuit or data path. The word "SYSTEMS" is written in a bold, orange, sans-serif font within a dark blue rectangular box below "ANiDIG". A registered trademark symbol (®) is located to the upper right of "ANiDIG".

PRODUCT NAME

5379

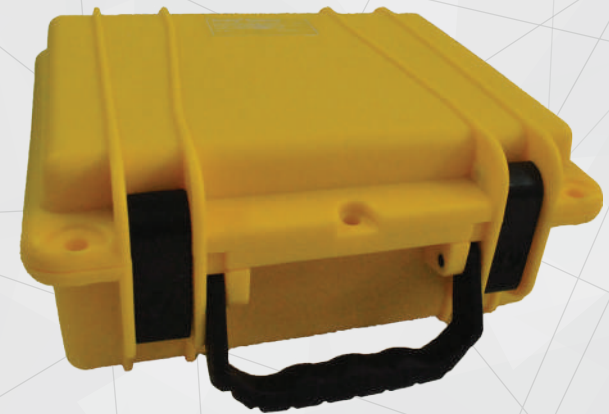

TECHNICAL SPECIFICATIONS

Cable Type	Jelly filled, Paper , PVC , Co-axial
Cable Gauge	0.4 mm , 0.5 mm , 0.63 mm, 0.9 mm , 1.5 mm & others
Display	5 inch , Graphic LCD 240 x 128 , White Backlit
Dead Zone	< 10 mtrs
Sampling Speed	50 Mhz
Zoom	6 levels
Types of Fault	Open faults, Short faults, Low Insulation faults , Earth Faults
Gain	Automatic levels - 8 / Manual - 2 levels
Range	More than 15 kms & Low Insulation Fault Upto 15 Kms
V/2	60 to 140 (user settable)
Accuracy	± 0.5% x Cable Length
Additional Features	Cable Pair Resistance, High Voltage presence , Waveform Comparison

GENERAL SPECIFICATIONS

Size	260 mm x 240 mm x 120 mm
Weight	2.5 kg (with Battery)
Operating Temperature	-10° C to + 55°C
Storage Temperature	-20° C to + 60°C
Power	4400 mAh Li-Ion Battery (Rechargeable)
Battery Life	8 hrs (continuous operation)
Recharge Time	8 hrs

5379



No. 34/2, 3rd Floor, 10th Cross,
Rajaji Nagar 1st N Block, Bengaluru - 560010
HQ : Bengaluru, Karnataka, IN



+91 99800 97685



andigsystem@gmail.com



www.andigsystems.co.in