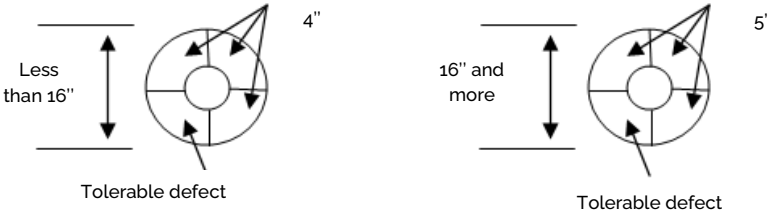


Cedar

Logs

MINIMUM DIAMETER	Top – 8 ½"
MINIMUM LENGHT	Logs need to be slashed to 8'6" minimum
LIMB	All branches have to be removed and cutted flush with the stem
TOP	Only stems topped with a chain saw are accepted, sheared tops will be refused
FORK	Forked logs will be culled
CURVE	Maximum 6" on 8'
PILING	Logs have to be hauled separately from treelenght
FLARE BUTT	Logs has to be cut above the roof level to minimize flared butt effect
DEFECTS	<p>Logs with a large end diameter of less than 16" must contain a minimum of three faces of 4" of sound peripheral wood, and logs of 16" and more must contain a minimum of 3 faces of 5" of sound peripheral wood</p> 

Any logs that do not meet these specifications, contain less sound wood than the minimum, or contain excessive of the following defects:

- Splitted
- Ants, worms, woodpecker holes
- Black heart (a s-pécial attention has to be given to black heart during winter - operation)

Will be removed, to be deducted, or be rejected.

Sylvain Garneau, Purchasing manager.

sgarneau@sbccedar.com

1-819-661-2766



754, 8th street, Saint-Prosper, Québec, Canada G0M 1Y0
 Tel. : 418-594-6201 / Fax : 418-594-8334 / sbccedar.com