




SERIE AURORA



SERIE AURORA

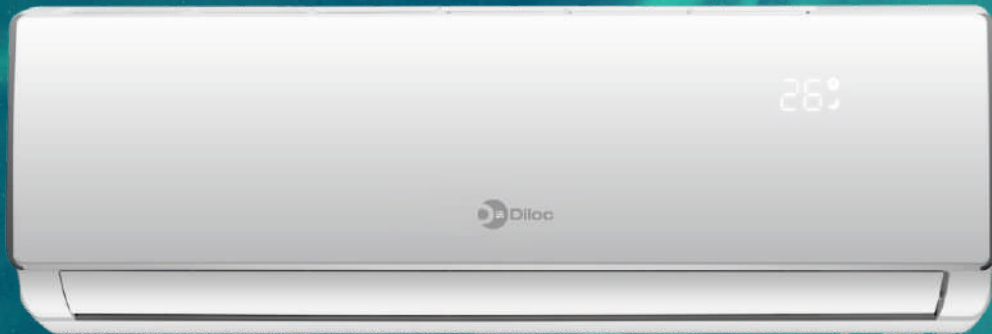

		D.AURORA109+ D.AURORA09	D.AURORA112+ D.AURORA12	D.AURORA118+ D.AURORA18	D.AURORA124+ D.AURORA24
Alimentazione		220-240V~/50Hz/1P			
Raffreddamento					
Capacità nominale	Btu	9000 (3205~11253)	12000 (3412~12864)	18000(4265~20165)	24000(5118~26615)
Capacità nominale	W	2600 (940~3300)	3400(1000~3770)	5200(1250~5910)	7040(1500~7800)
Potenza assorbita	W	851(240~1380)	1130(290~1500)	1567(330~2350)	2166(390~2800)
Corrente assorbita	A	4.1(1.2~8.0)	5.8(1.5~9.0)	6.9(1.5~12.0)	9,5(2,8~12,6)
EER		3,25	3,23	3,28	3,25
Riscaldamento					
Capacità nominale	Btu	9200(3207~10918)	12000(3412~13000)	18000(4265~20711)	25000(5120~26970)
Capacità nominale	W	2680(940~3200)	3420(1000~3810)	5300(1250~6070)	7200(1500~7900)
Potenza assorbita	W	786(240~1552)	1005(290~1720)	1376(340~2550)	2166(390~2800)
Corrente assorbita	A	3,6(1,2~9,0)	4,4(1,5~10)	6,2(1,6~13,0)	9,6(1,8~12,6)
COP		3,73	3,71	3,78	3,71
Raffr. stagionale/Capacità (pdesignc)	kW	2,6	3,4	5,1	7,0
SEER/Classe di efficienza energetica		6,1/A++	6,1/A++	6,5/A++	6,5/A++
Risc.(clima caldo)/Capacità (pdesignh)	kW	2,3	2,5	5,1	6,0
SCOP/Classe di efficienza energetica		5,1/A+++	5,1/A+++	5,1/A+++	5,1/A+++
Capacità di deumidificazione	L/h	1,00	1,20	1,50	1,80
Unità interna					
Portata d'aria max.	m³/h	420	570	800	1000
Liv.Press. sonora (Turbo/Alta/Med/Bassa/Mute)	dB(A)	42/37/35/33/30/25/22	43/40/38/35/31/27/22	47/43/40/37/34/31/27	48/46/44/41/39/36/30
Liv.Potenza sonora (Turbo/Alta/Med/Bassa/Mute)	dB(A)	52/47/45/43/40/35/32	53/50/47/44/40/36/32	56/53/50/47/44/41/37	58/56/54/51/49/46/40
Dimensioni (LxAxP)	mm	698x255x190	777x250x201	910x294x206	1010x315x220
Peso netto/lordo	Kg	6,5/8,5	7,5/9,5	9,5/13	12/16
Unità Esterna					
Liv. di Pressione sonora/Potenza sonora	dB(A)	52/62	53/62	56/65	58/67
Dimensioni (LxAxP)	mm	712x459x276	712x459x276	853x602x349	920x699x380
Peso netto/lordo	Kg	21/24	21/24	32,5/35	38/42
Refrigerante					
Tipo/GWP		R32/675	R32/675	R32/675	R32/675
Quantità precaricata /T equiv. CO²	Kg/T	0,49/0,331	0,49/0,331	0,96/0,648	1,14/0,77
Tubazione gas					
Lato liquido/Lato gas	Pollici	1/4"/3/8"	1/4"/3/8"	1/4"/3/8"	1/2"/1/4"
Max lungh. Tubazioni/dislivello	m	25/10	25/10	25/10	25/10
Cavi di collegamento	n° per sez.	4x0.75mm²	4x0.75mm²	4x0.75mm²	4x0.75mm²

