



ATTACHMENTS

Make it EZ!


1-877-433-5733

www.ezspotur.com



Make it EZ!

WIRE REEL
EZ-WR01

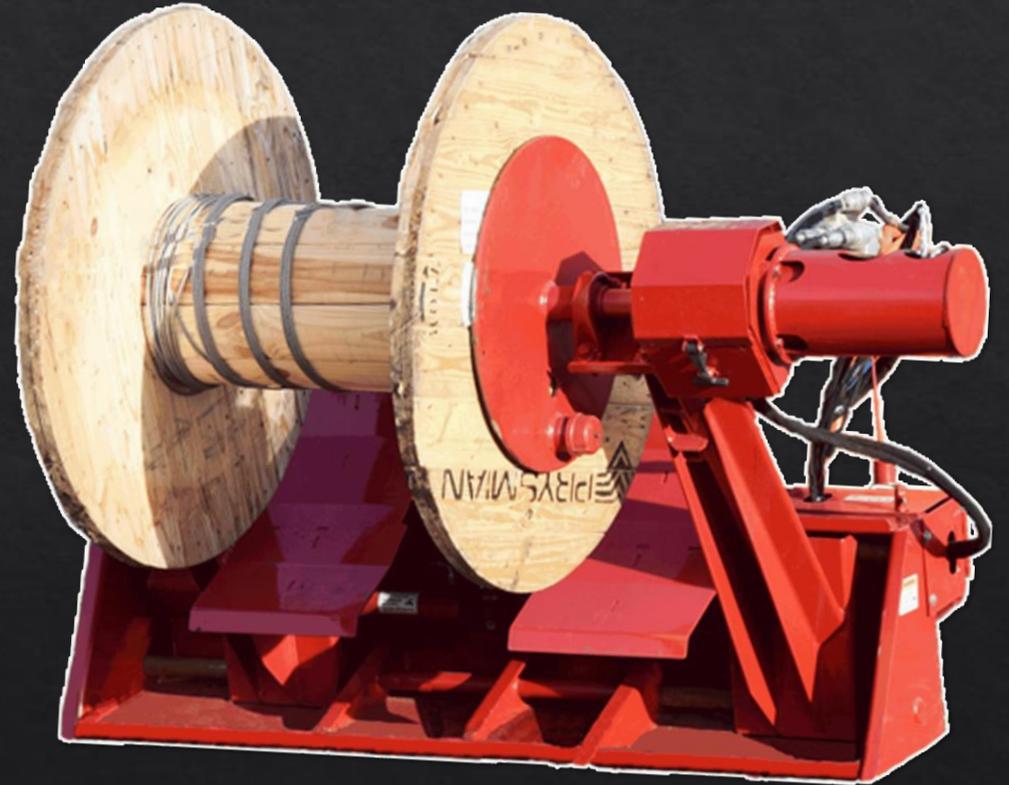



Make it EZ!




**SAFETY
FEATURES**



Make it EZ!

PIN SAFETY

The attachment is equipped with a smaller pin in addition to the main center pin that goes into the spool. The small pin holds the spool securely for rotation rather than relying solely on clamping the spool.

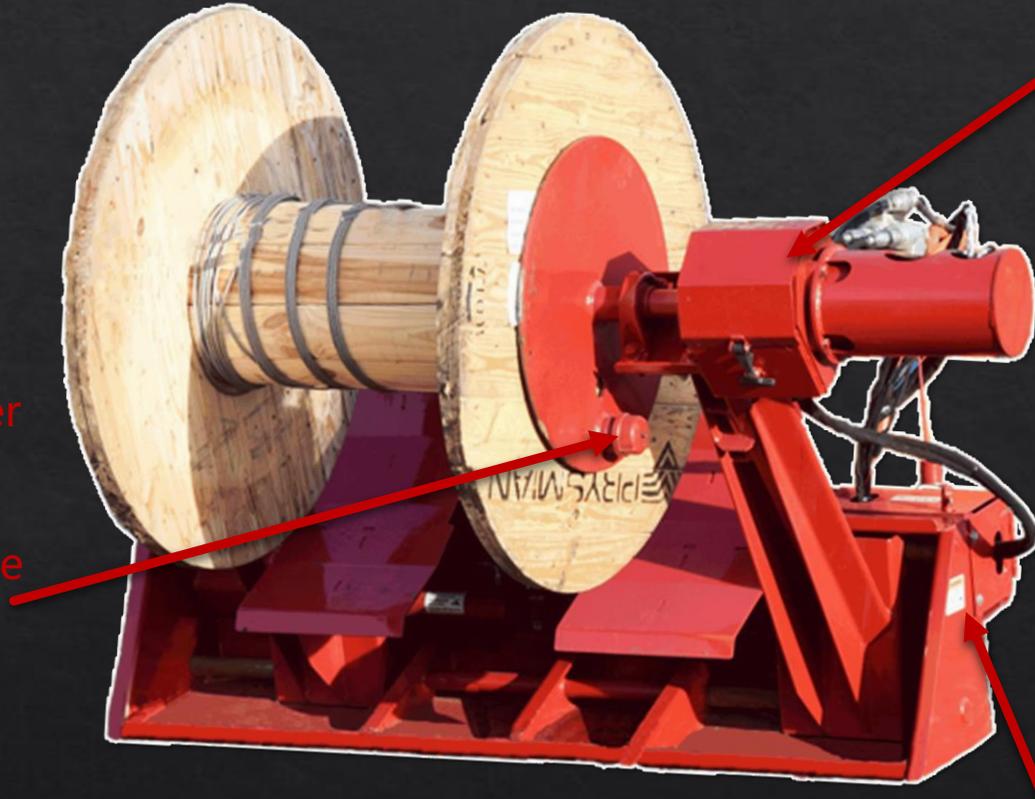

GUARD SAFETY

Guards protect the users of the wire reel from moving parts. A guard covers the chain that rotates the spool. There is also a cover for the valve to prevent damage to the valve if something drops on it.

DECAL SAFETY

All units have pictorial and written caution decals



Make it EZ!

SPRING HOSE MOUNT



HOSE SAFETY

- All hydraulic hoses are **Cordura protected**.
- Hoses have an operating pressure of 3,000psi
- Hoses have a burst pressure of 12,000psi.
- The spring hose unit insures that the hydraulic line will not get pinched.
- The spring hose unit keeps the hoses out of the dirt


CONNECTION SAFETY

Quick attach plate has doublers at the pin holes to insure they will not tear out.


Quick attach plate has gusset on top for extra support

QUICK ATTACH GUSSET

DOUBLERS

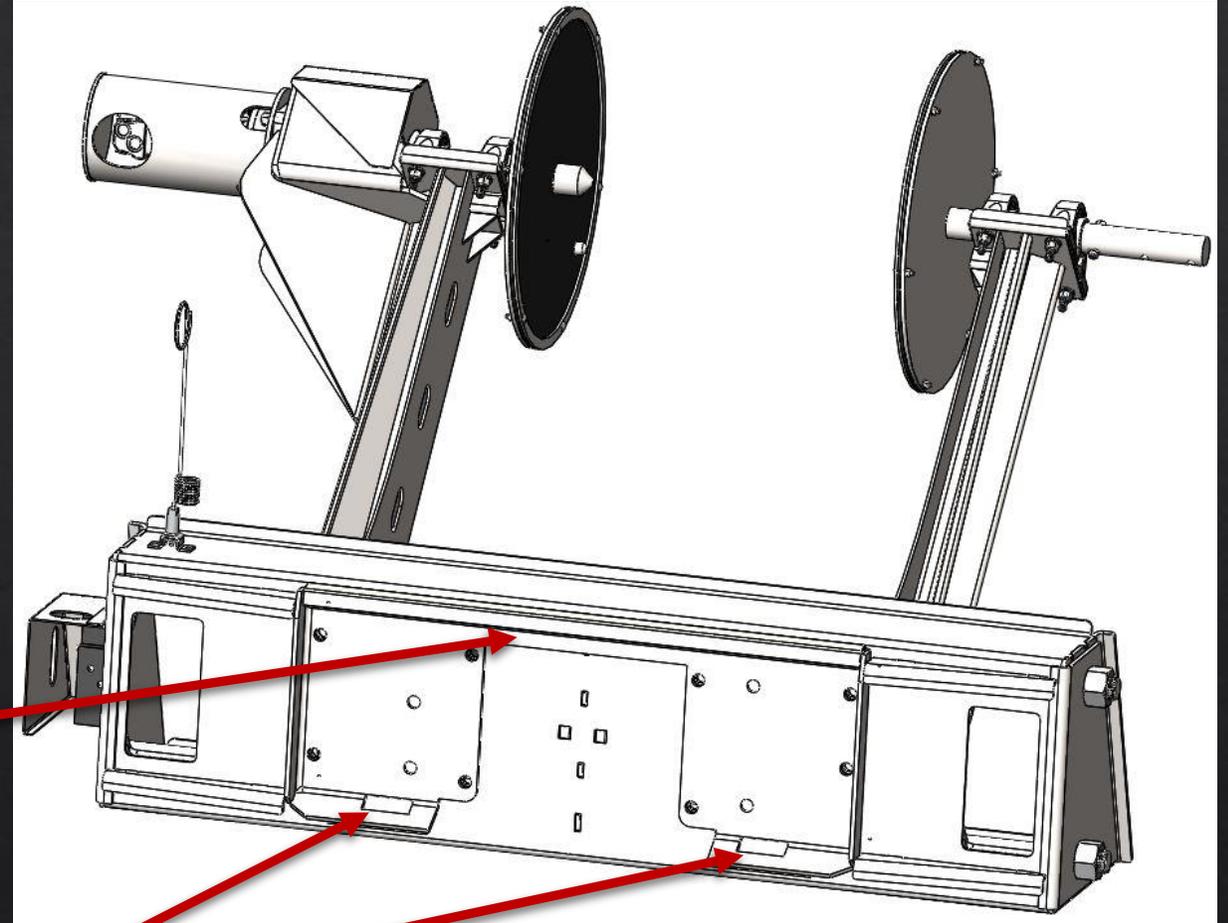


Clamp Specifications

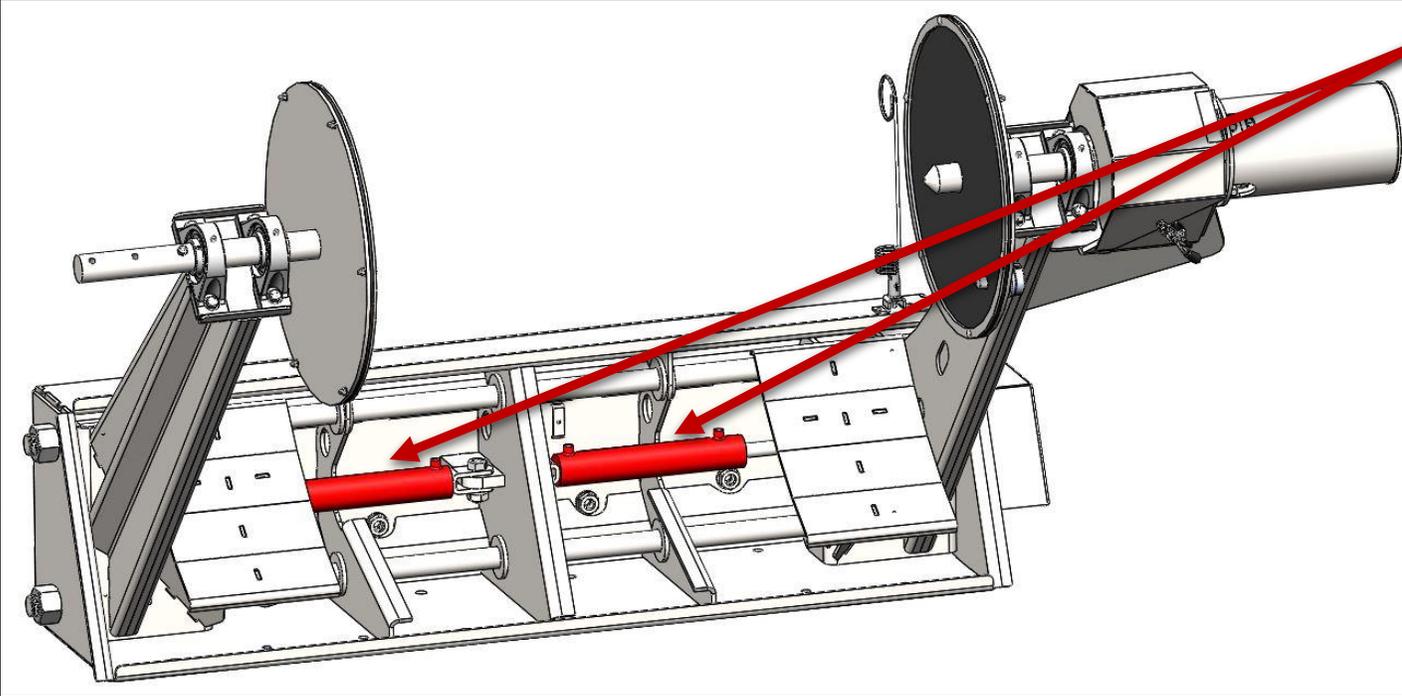


CLAMP CYLINDERS

- 2.5"x12.5" CLAMP CYLINDERS
- Break out force of 11,045 lbs
- Grips wire spools securely


Dimensions for Wire Reel with shaft pinned in last hole

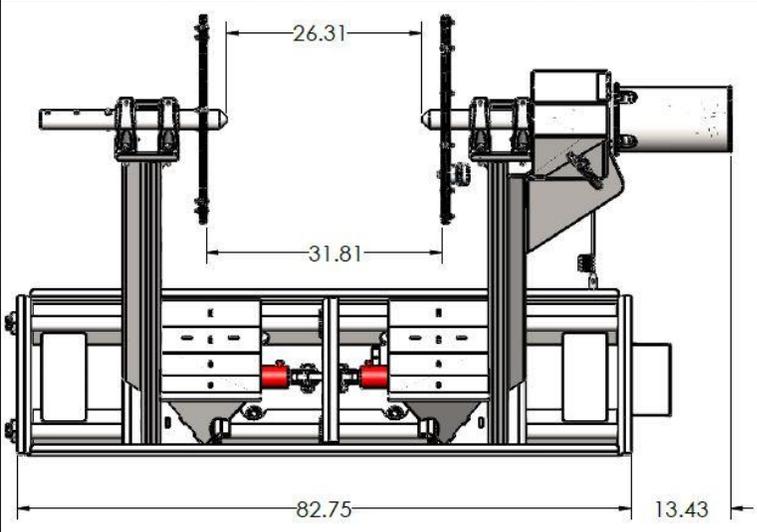


For spools 32 to 50 inches wide

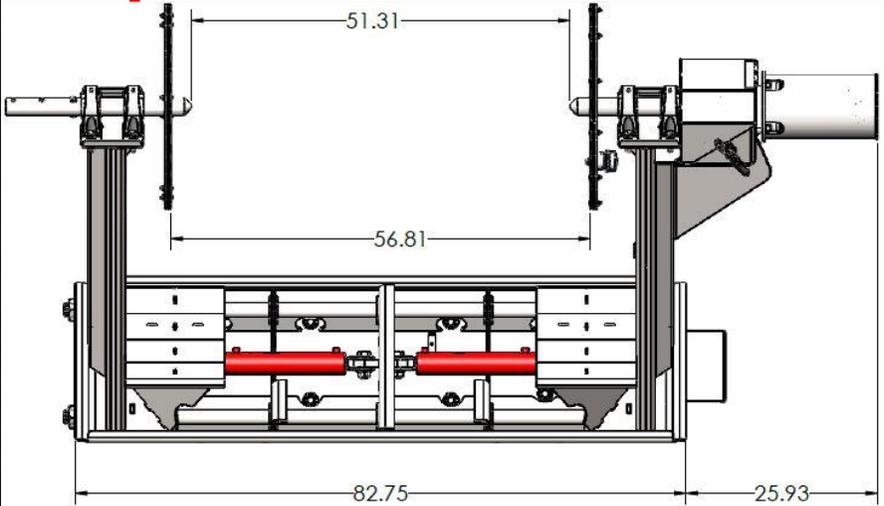


Dimensions for Wire Reel with shaft pinned in first hole

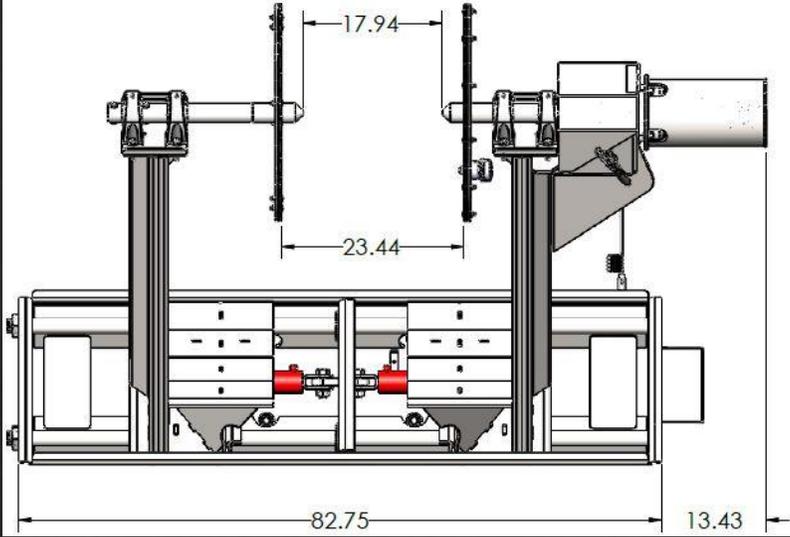

For spools 24 to 42 inches wide

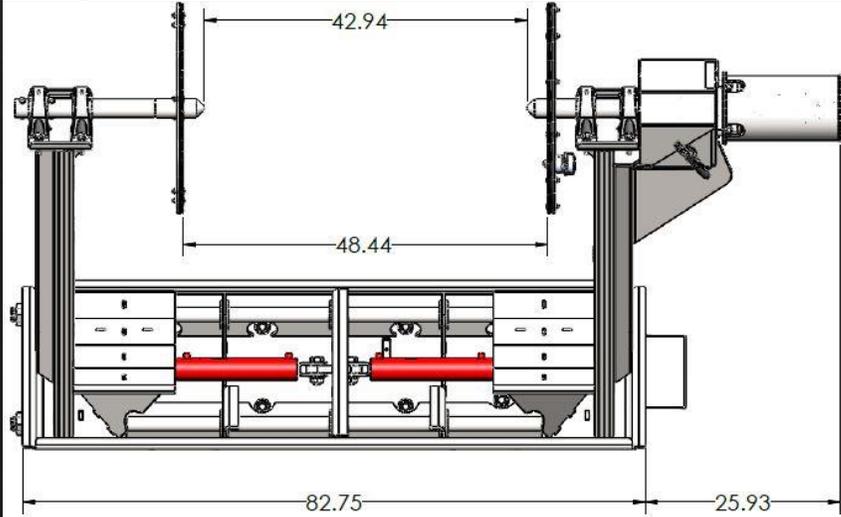

PLANETARY DRIVE

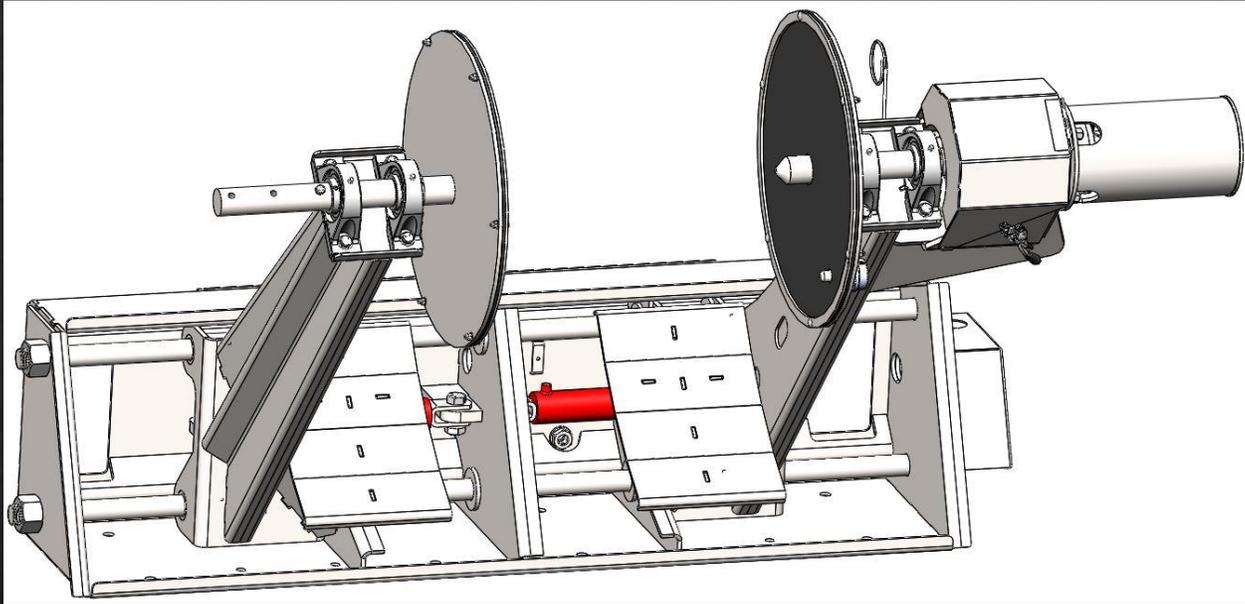

Planetary Drive

- Torque: 30,000 in lbs
- 5.2:1 Reduction Ratio

Motor


- Torque: 5,730 in lbs
- Displacement 18.7 in³/r

Motor and Planetary Drive Combined

- Torque: 37,908 in lbs

Rubber Lined Plate to grip reel

2.5" 4140 shaft to hold the reel

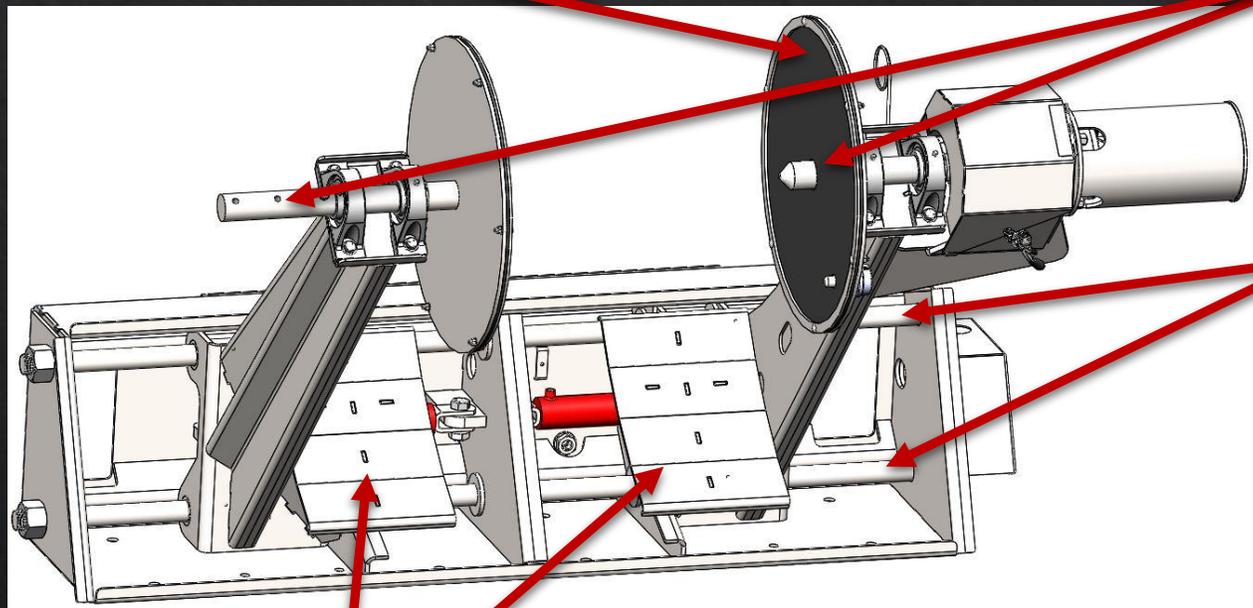

1 7/8" 4140 slider rod

Positioner Plate for lining up reel

EZ SPOT UR
ATTACHMENTS

Make it EZ!



- Safely spool and unspool wire
- One man operational



ATTACHMENTS

Make it EZ!

• Simple to load



• Raise to any height



Product Specifications

- Universal Quick Tach mounting system.
- 1,925 lbs. attachment empty weight.
- Can be adapted to all types of machines (backhoes, telehandlers, and excavators.)
- Maximum spool diameter:72 inches
- Maximum loaded spool weight: 5,900 lbs
- Spring loaded pin for catching the drive hole on the reel.



Make it EZ!

Product Specifications



- Free Wheeling Capability
- 3/4 inch Flush Face Coupling
- Spring Hose Mount included
- Composed of Grade 50 or higher steel
- Core welded.

EZ SPOT UR
ATTACHMENTS

Make it EZ!

WIRE REEL VIDEO





Make it EZ!

• All EZ Spot UR Attachments are proudly made in the USA

• All Attachments come with a One Year Warranty

