



ATTACHMENTS

Make it EZ!

1-877-433-5733

www.ezspotur.com



Make it EZ!



SPEED BAGGER
EZ-0013



ATTACHMENTS

Make it EZ!



SAFETY FEATURES

EZ SPOT UR
ATTACHMENTS


Make it EZ!

AUGER SAFETY

The auger won't work until the lid is closed engaging the sequencing valve.

GUARD SAFETY

Guards protect the users of the speed bagger from moving parts. A guard covers the chain that rotates the auger. The chute for the sand has a safety rod that makes the opening too small for people to fit their hands in it.

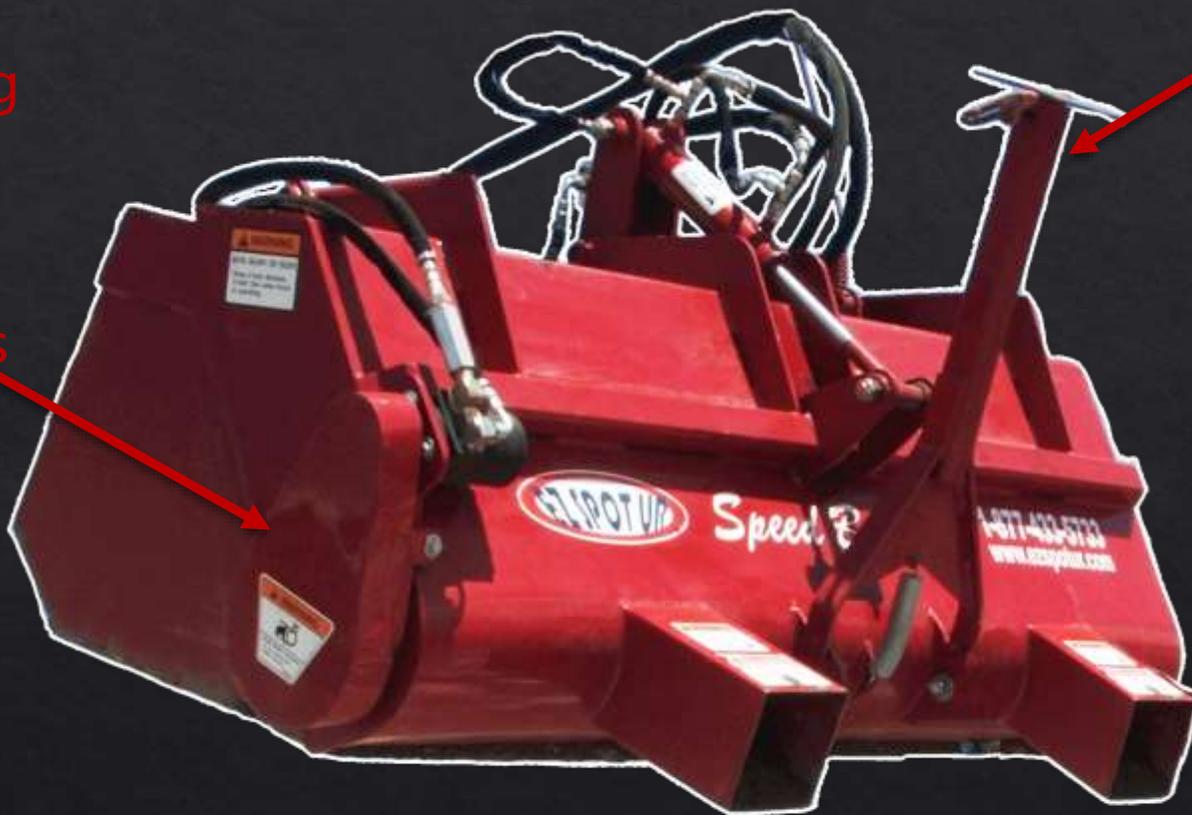

STAND SAFETY

The attachment is equipped with a safety stand to prevent the speed bagger from falling onto the crew due to accidental lowering of the attachment by the operator.

HOSE SAFETY

- All hydraulic hoses are **Cordura protected.**
- Hoses have an operating pressure of 3,000 psi
- Hoses have a burst pressure of 12,000 psi.
- The spring hose unit ensures that the hydraulic line will not get pinched.
- The spring hose unit keeps the hoses out of the dirt

SPRING HOSE MOUNT




CONNECTION SAFETY

Quick attach plate has doublers at the pin holes to insure they will not tear out.


Quick attach plate has gusset on top for extra support

QUICK ATTACH GUSSET

DOUBLERS

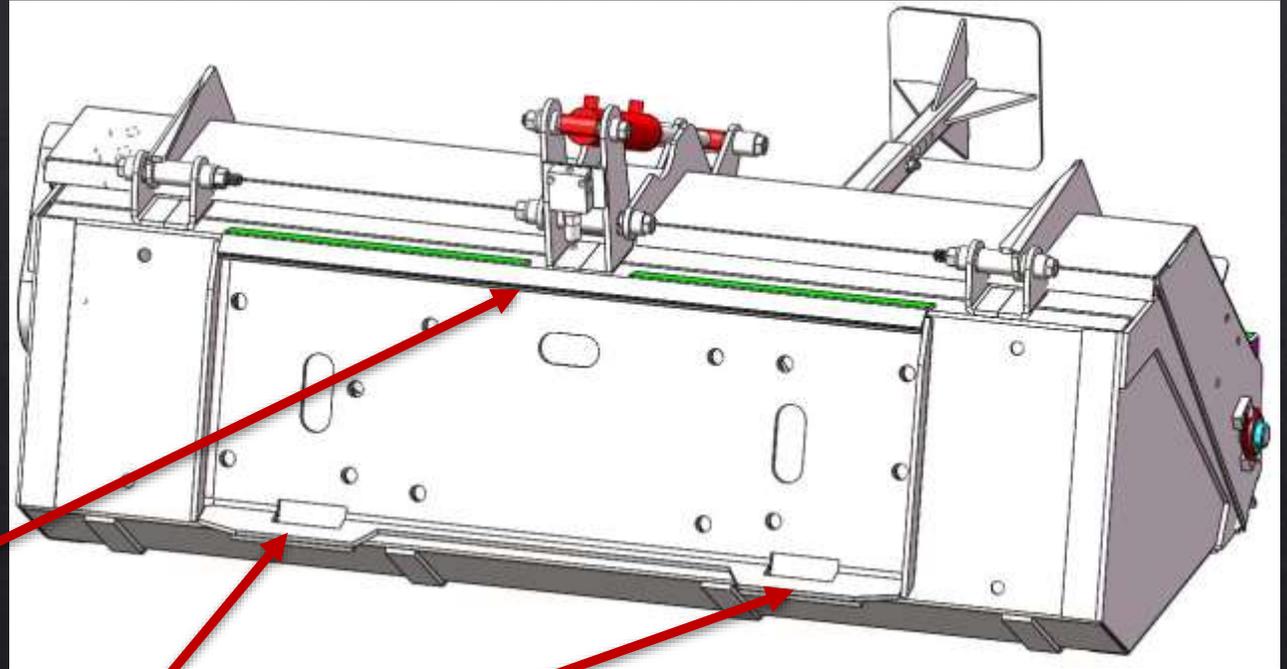


Clamp Specifications

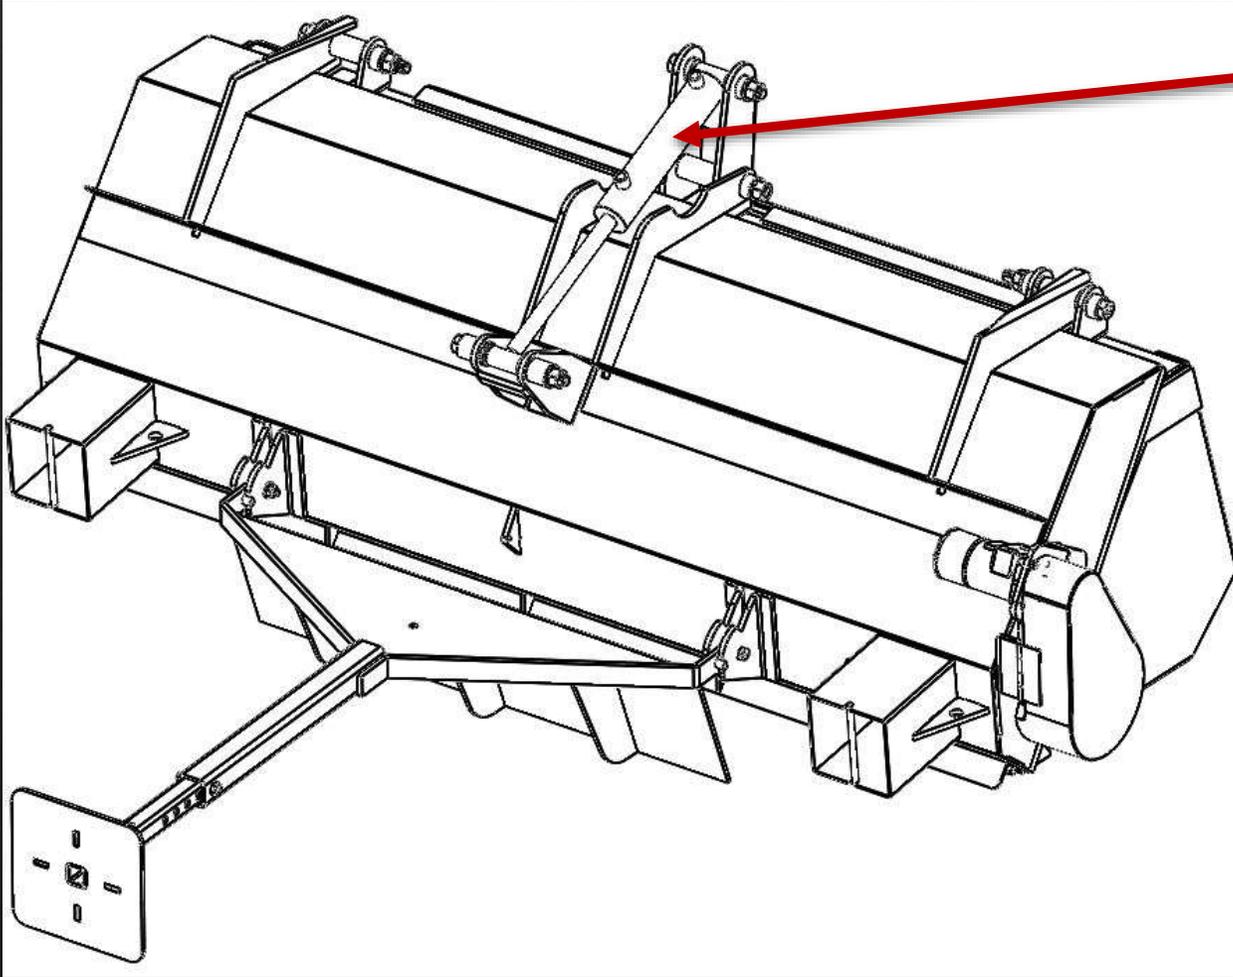

CLAMP CYLINDER

- 2"x8" CLAMP CYLINDER
- Break out force of 9,425 lbs
- Opens and closes attachment to scoop sand

Motor Specifications

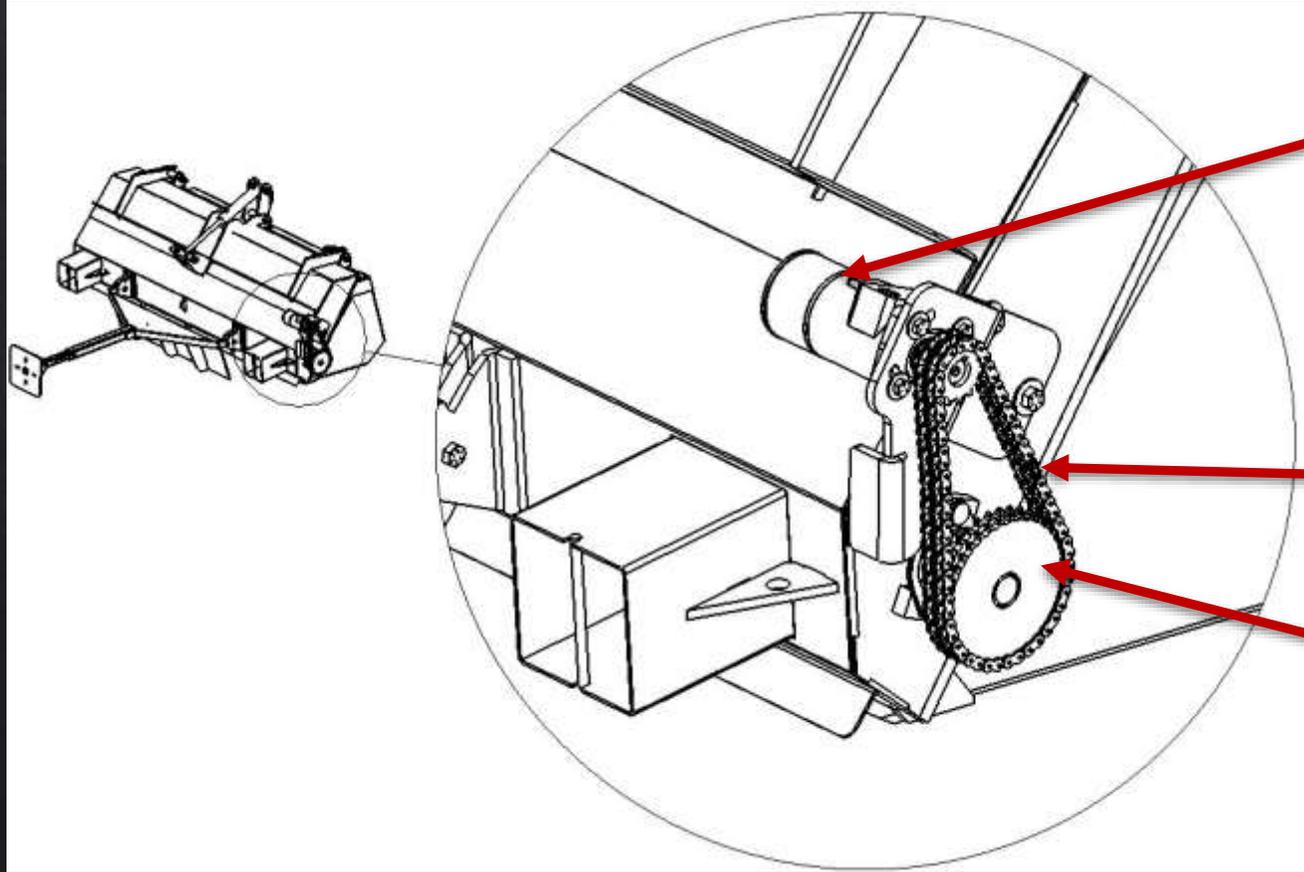


Motor

- Torque: 1954 lb-in
- Displacement: 9.7 in³/r

Double 40 Chain

5.5 inch sprocket


Auger Specifications

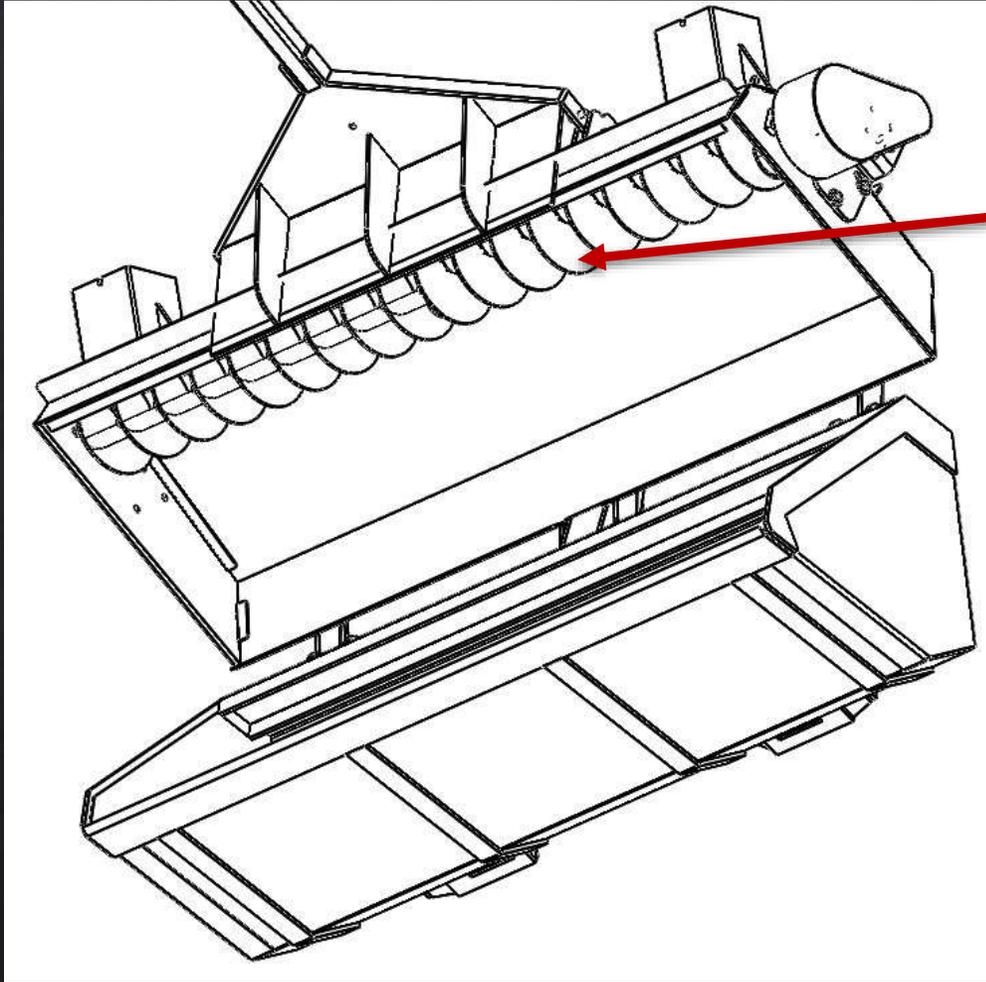

Auger

- 7 inch flighting
- Designed for pushing material through each chute

Bucket Specifications

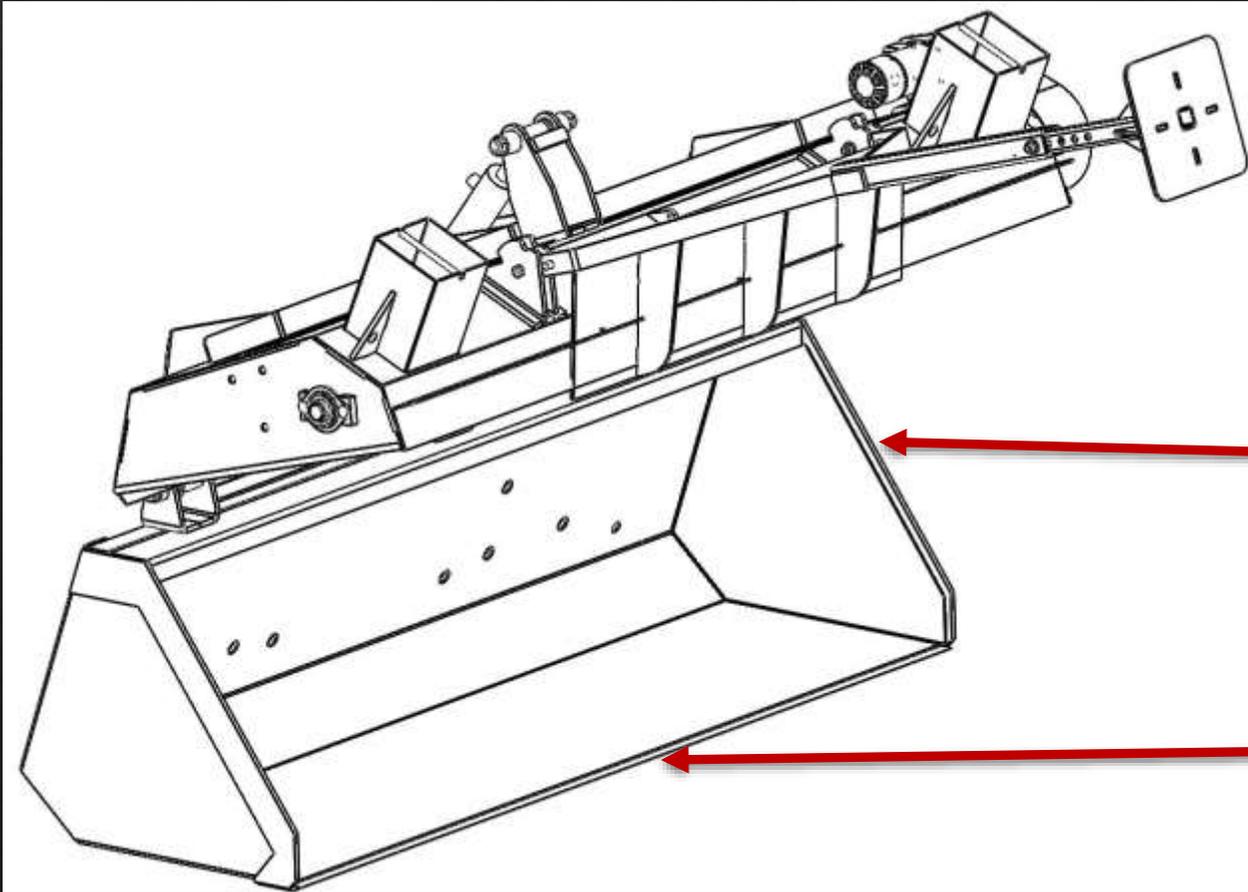


Bucket Capacity: 0.49 cubic yards

Reinforced edges 3/8 inch
Grade 50

Cutting Edge allows for digging into
sand

Chute Specifications

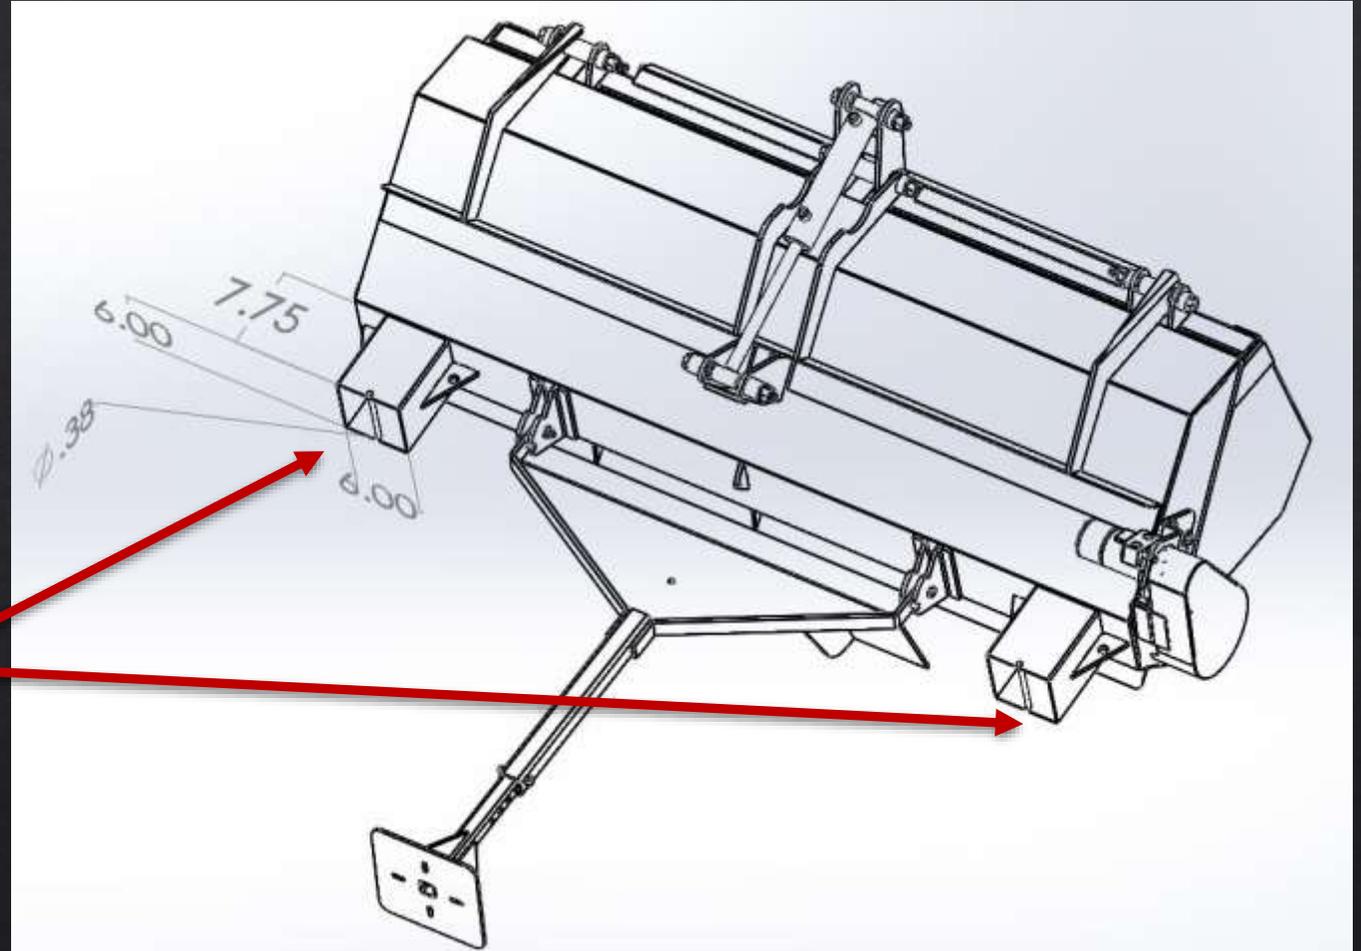

2 Chutes allow
for two sandbags
to be filled at the
same time

EZ SPOT UR
ATTACHMENTS

Make it EZ!



**IDEAL FOR EMERGENCY
SANDBAG DIKES**

**FILL AT THE POINT
OF USE**

EZ SPOT UR
ATTACHMENTS

Make it EZ!

**FILL
1000
SAND
BAGS IN
HOURS**



Product Specifications



- Universal Quick Tach' mounting system.
- Can be adapted to fit all machines.
- Stand-alone unit.
- 746 lbs. attachment weight.

Product Specifications



- Augers are enabled only when the lid is closed engaging the sequencing valve.
- Conversion nozzle can be purchased to make it a single shoot unit.
- Comes standard with $\frac{3}{4}$ " flush faced couplers
- Spring hose mount included.
- Composed of Grade 50 material
- Core welded

SPEED BAGGER VIDEO





Make it EZ!

- **ALL EZ SPOT UR PRODUCTS ARE PROUDLY MADE IN THE USA**
- **ALL OF OUR ATTACHMENTS COME WITH A ONE YEAR WARRANTY**

