


Step 1- Assemble the Handle

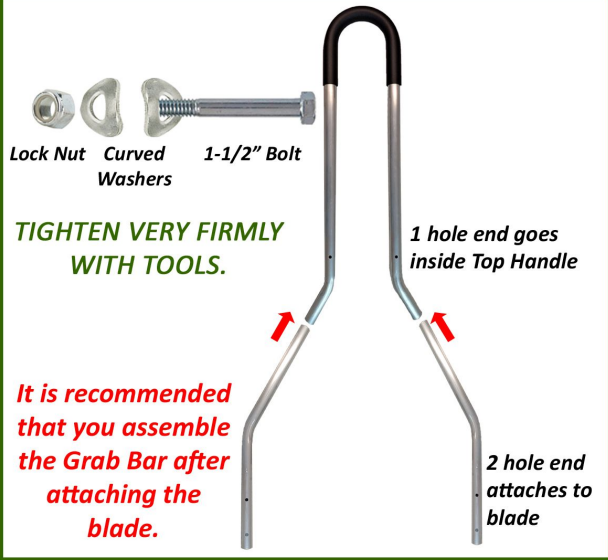

How to Store Your MANPLOW When Not in Use

To keep your blade in good condition, store your MANPLOW vertically on an even surface in a cool location.

What Not To Do:


- Don't store laying down flat.
- Don't store where other things may be put on top of it.
- Don't store in Garage rafters where it gets hot in summer.
- Don't store in backyard sheds that get hot in summer.



Step 3- Attach Grab Bar



Fastener Order- Bolt, Curved Washer, Grab Bar, 2 Saddle Spacers (flat side back to back), Handle Leg, Curved Washer, Lock Nut.

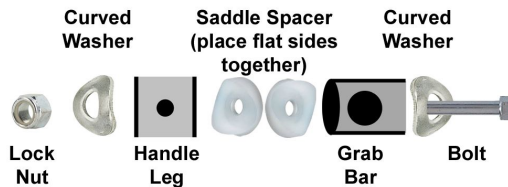

TIGHTEN VERY FIRMLY WITH TOOLS.

Blade to handle and Grab Bar.

Step 2- Attaching the Blade

First

Slide black handle connector over each end of the legs. Align holes. It should be snug (if to snug, run under hot water).

Back of blade will go against flat side of handle connector.

Second

Insert the bolt (4) with large washer through the front of the blade and through the handle connector. Small washers and Lock Nuts in back.

HAND TIGHTEN ONLY!



ASSEMBLY

www.manplow.com/assembly-instructions



It is recommended that you assemble the handle first.

Problems with your order?

Damage? Missing parts? Trouble assembling? For the quickest solution, contact MANPLOW directly at theman@manplow.com. Our customer service team is committed to resolving any issue you may have.