



9 Minton Park, Amesbury, Wiltshire, SP4 7RT  
01980 258001


## Unique Composite Decking - SPECIFICATIONS

Composite Decking is fast taking over from the traditional wooden type decking. Unique Composite Decking Boards are made from 60% wood fibre, 30% plastic and 10% additives, and this all goes to giving our product fantastic advantages over wood.

- It doesn't warp or twist
- It doesn't splinter
- It doesn't need preservatives
- It doesn't attract algae
- It doesn't rot

And because of the unique design: there are no screw heads protruding; it's non-slip; you clean it with a mop or pressure washer and it's really easy to install!

Each board is **DOUBLE SIDED** so you can choose either narrow or wide grooved finish with Charcoal Grey, Silver Grey and Dark Coffee boards. The 'Antique Oak', Tudor Oak' and 'Silvered Oak' boards have narrow grooves on one side and the reverse is pure wood grain texture.

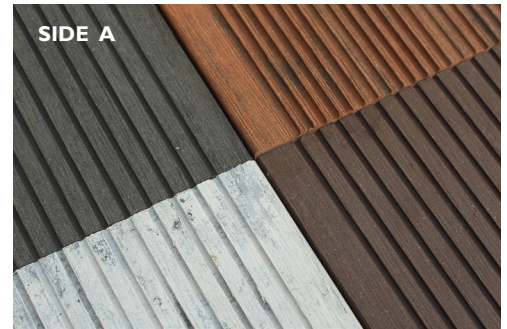

'Antique Oak' (C5)

Silver Grey

Dark Coffee

Charcoal Grey

'Tudor Oak' (C6)


'Silvered Oak' (IPE)

Standard boards measure 2.2m long and 145mm wide with a thickness of 21mm.


'Bullnose' boards measure 2.2m long and 135mm wide with a thickness of 21mm.

70mm deep edging strip is 11mm thick and 2.2m long. Available in 3 colours: Charcoal Grey, Dark Coffee, 'Antique Oak' Wood Grain.


This strip is also double sided with narrow grooves on one side and pure wood grain texture on the reverse.

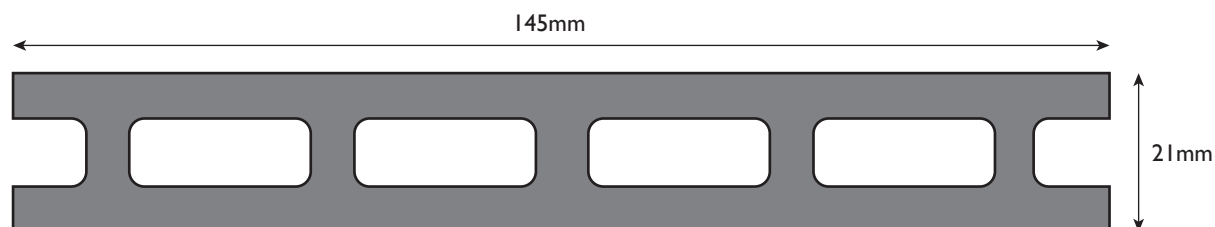

STANDARD BOARD

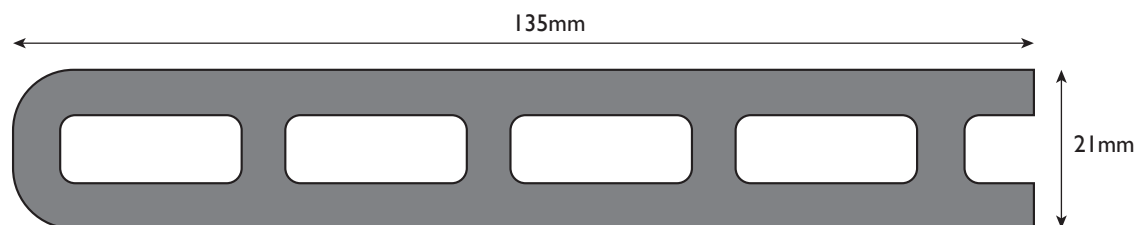

BULLNOSE BOARD

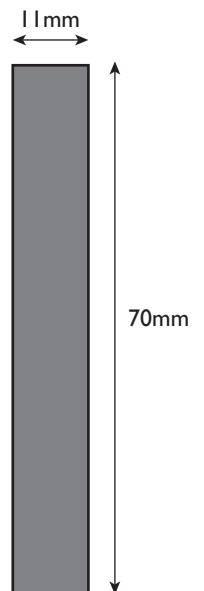


EDGING STRIP


## Using Decking Boards for Edging.

The material's flexibility means that there are many different ways it can be configured depending on your application and your taste. Here are a few options to consider.



Standard Boards used as Edging

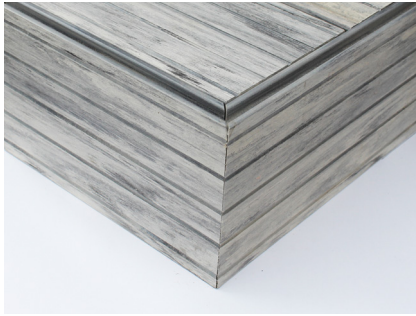



Two configurations with Bullnose Boards used as edging

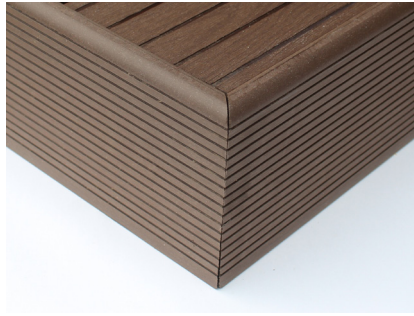


70mm Edging Strip

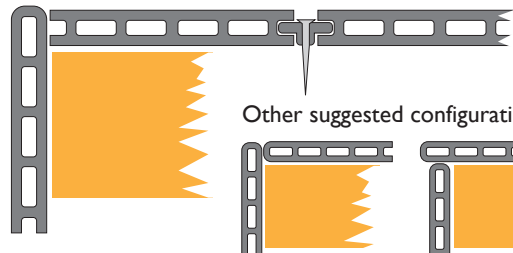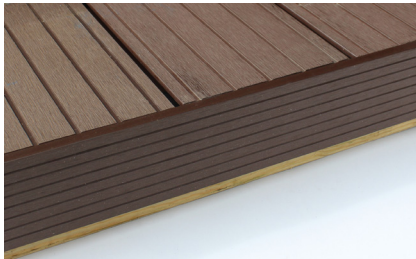

Other suggested configurations

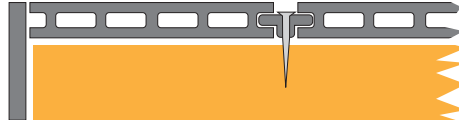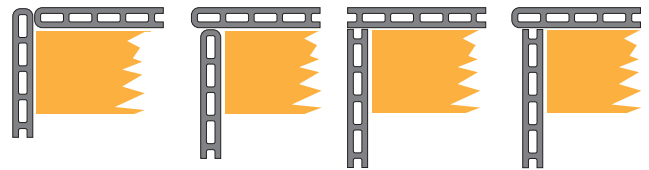

Other suggested configurations




Bullnose Boards used to define the edge of the deck

## Fixing.

The fixings method is shown here. Very simple and very effective with boards being held to joists by T shaped plastic clips that can be removed at any time in the future.

Each board needs at least 4 to 6 retaining clips and would require 4 to 5 joists along it's length, depending on intended usage and layout.

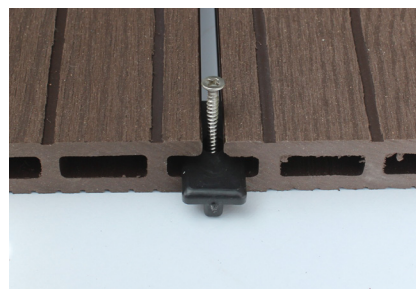

Plastic Fixings &  
Non-Rust Stainless Screws  
Packs of 100

## UV Protection.

Our boards are manufactured with a 2-3% UV resistant additive which helps control the effects of fading and keeps it to a minimum. Some colour distortion may occur over a long period depending on conditions.



9 Minton Park, Amesbury,  
Wiltshire, SP4 7RT

01980 258001