



JIMSOAR INTERNATIONAL CORP.,

P. O. BOX 96 - 10 TAIPEI, TAIWAN, REPUBLIC OF CHINA

Mobile: 886-937-142951 Tel: 886-2-27040238 Fax: 886-2-27040177

WeChat: 86-13262688150

QQ: 859722046

e-mail: jimsoar@ms13.hinet.net

<http://www.jimsoar-co.com>



ISO9001



0036



EN3



Tel: 886-2-27040238
P.O. Box 96-10 Taipei, Taiwan

Fax: 886-2-27040177
jimsoar@ms13.hinet.net

WeChat: 86 13262688150
http://www.jimsoar.com

CETIFICATE






Tel: 886-2-27040238
P.O. Box 96-10 Taipei, Taiwan

Fax: 886-2-27040177
jimsoar@ms13.hinet.net

WeChat: 86 13262688150
<http://www.jimsoar.com>

FACTORY WORKSHOP

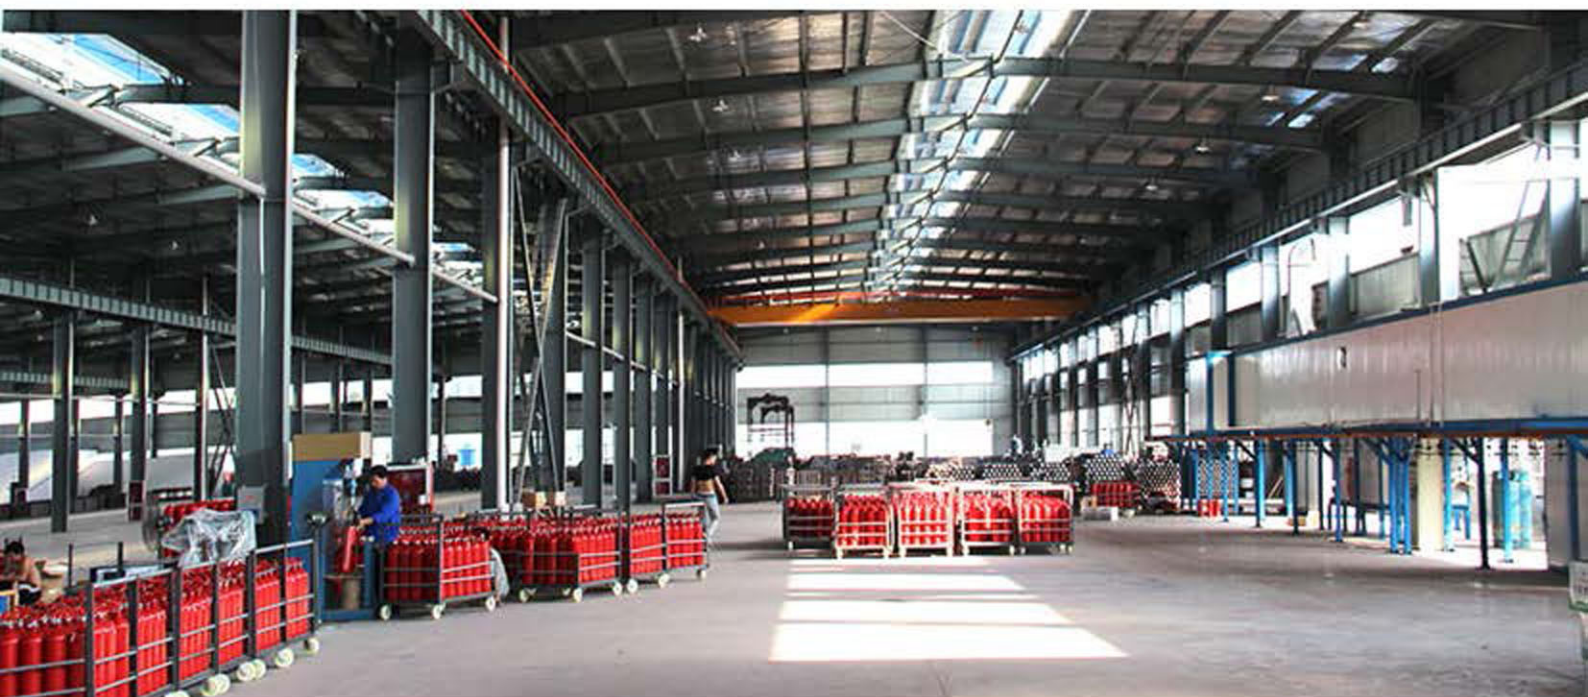



Tel: 886-2-27040238
P.O. Box 96-10 Taipei, Taiwan

Fax: 886-2-27040177
jimsoar@ms13.hinet.net

WeChat: 86 13262688150
http://www.jimsoar.com

FACTORY INTRODUCTION

傑濠實業有限公司消防器材有限公司成立于2007年，是一家集生产与研发各类灭火器、消防配件、以及对外贸易于一体的新兴民营企业。工厂座落于329国道边上，宁波机场40分钟，上海机场2个小时可以直达。厂房占地面积10000平方米。我们在上海也设立了上海昂领销售分公司。

公司以技术为核心，视质量为生命，建立了严格的质量管理体系，所有灭火器以及消防配件完全按照CE和BSI EN3 标准进行生产，在国内外市场上赢得了良好的信誉，产品深受广大客户青睐。

Established in 2007, Shaoxing City Jimsoar Safeway Fire Fighting Equipment Co.,Ltd is a professional manufacturer and exporter which designs and develops the production of fire extinguisher and fire fighting equipments in China. The factory is located nearby No. 329 National Highway, very near from Ningbo and Shanghai airport, which provides us with convenient transportation. Covers an area of 10,000m³ with 100 workers. Also we set up Shanghai Allife sales office in Shanghai.

Our company takes technology as our core, regarding quality as the life. We have a strict quality management system to ensure the quality, winning the good reputation in domestic and foreign markets, favored by customers.





CONTENT

干粉灭火器 (常规带脚圈)	
DRY POWDER FIRE EXTINGUISHER(FOOT RING)	01
干粉灭火器 (常规带脚鼎)	
DRY POWDER FIRE EXTINGUISHER(CONVEX FOOT)	02
干粉灭火器筒体	
DRY POWDER CYLINDER	03
干粉自动 (悬挂) 灭火器	
AUTOMATIC DRY POWDER FIRE EXTINGUISHER	04
清水&泡沫灭火器	
WATER & FOAM FIRE EXTINGUISHER	05
不锈钢灭火器	
STAINLESS STEEL FIRE EXTINGUISHER	06
二氧化碳灭火器	
CO2 FIRE EXTINGUISHER	07
推车式干粉&清水&泡沫灭火器	
WHEELED DRY POWDER & WATER & FOAM FIRE EXTINGUISHER	08
推车式二氧化碳灭火器	
WHEELED CO2 FIRE EXTINGUISHER	09
CE/BSI EN3认证灭火器	
CE/BSI EN3 CERTIFICATED FIRE EXTINGUISHER	10-15
阀门	
VALVE	16
灭火器配件	
FIRE EXTINGUISHER ACCESSORIES	17
消防水带	
FIRE HOSE	18
消防接扣	
FIRE HOSE COUPLING	19-20
消防栓	
FIRE HYDRANT VALVE	21
消防喷枪	
FIRE NOZZLE	22
消防卷盘	
FIRE HOSE REEL	23
消防箱	
FIRE HOSE CABINET	24
其他消防设备	
OTHER FIRE FIGHTING EQUIPMENTS	25



干粉灭火器(常规带脚圈)

DRY POWDER FIRE EXTINGUISHER (FOOT RING)



■ 参数

Product Specification

型号 Item No.	SWDF-0.5	SWDF-01	SWDF-02	SWDF-03	SWDF-04	SWDF-4.5	SWDF-05	SWDF-06	SWDF-08	SWDF-09	SWDF-10	SWDF-12
规格 Capacity	0.5KG	1KG	2KG	3KG	4KG	4.5KG	5KG	6KG	8KG	9KG	10KG	12KG
外径 Out-Dia	67mm	90mm	110mm	130mm	130mm	130mm	140mm	160mm	160mm	182mm	182mm	182mm
瓶高 Cylinder Height	230mm	250mm	305mm	350mm	410mm	410mm	420mm	420mm	500mm	500mm	550mm	600mm
灭火剂含量 Powder Weight	0.5KG	1KG	2KG	3KG	4KG	4.5KG	5KG	6KG	8KG	9KG	10KG	12KG
筒体壁厚 Thickness	0.9mm	0.9mm	1mm	1.2mm	1.2mm	1.2mm	1.2mm	1.2mm	1.2mm	1.5mm	1.5mm	1.5mm
温度范围 Temperature Range	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C
最大工作压力 MAX W.P.	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	37.5*15*30 cm/10pcs	49*20*33 cm/10pcs	36*24*40 cm/6pcs	45*27*14 cm/2pcs	50*27*14 cm/2pcs	52*29*15 cm/2pcs	52*29*15 cm/2pcs	52*33*17 cm/2pcs	17*17*60 cm/pc	19*19*60 cm/pc	19*19*65 cm/pc	19*19*70 cm/pc
毛重 Gross Weight	13KG	16.5KG	21KG	10KG	12.8KG	14.4KG	16KG	17.6KG	11.5KG	13KG	14.5KG	17KG



干粉灭火器(常规带脚鼎)

DRY POWDER FIRE EXTINGUISHER (CONVEX FOOT)



■ 参数

Product Specification

型号 Item No.	SWDC-01	SWDC-02	SWDC-03	SWDC-04	SWDC-4.5	SWDC-06	SWDC-09	SWDC-12
规格 Capacity	1KG	2KG	3KG	4KG	4.5KG	6KG	9KG	12KG
外径 Out-Dia	90mm	110mm	130mm	130mm	135mm	160mm	180mm	190mm
瓶高 Cylinder Height	250mm	305mm	353mm	410mm	425mm	420mm	500mm	570mm
灭火剂含量 Powder Weight	1KG	2KG	3KG	4KG	4.5KG	6KG	9KG	12KG
温度范围 Temperature Range	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C
最大工作压力 MAX W.P.	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	49*20*33 cm/10pcs	36*24*40 cm/6pcs	45*27*14 cm/2pcs	50*27*14 cm/2pcs	52*29*15 cm/2pcs	52*33*17 cm/2pcs	19*19*60 cm/pc	19*19*70 cm/pc
毛重 Gross Weight	17KG	21.5KG	10.5KG	13KG	14.8KG	18KG	13.5KG	17.5KG



Tel: 886-2-27040238

P.O. Box 96-10 Taipei, Taiwan

Fax: 886-2-27040177

jimsoar@ms13.hinet.net

WeChat: 86 13262688150

http://www.jimsoar.com



干粉灭火器筒体(带脚圈) / DRY POWDER FIRE EXTINGUISHER CYLINDER (FOOT RING)



型号 Item No.	SWDF-01C	SWDF-02C	SWDF-03C	SWDF-04C	SWDF-4.5C	SWDF-05C	SWDF-06C	SWDF-08C	SWDF-09C	SWDF-10C	SWDF-12C
规格 Capacity	1KG	2KG	3KG	4KG	4.5KG	5KG	6KG	8KG	9KG	10KG	12KG
外径 Out-Dia	90mm	110mm	130mm	130mm	130mm	150mm	160mm	160mm	182mm	182mm	182mm
瓶高 Cylinder Height	250mm	305mm	350mm	410mm	410mm	420mm	420mm	500mm	500mm	550mm	600mm
壁厚 Thickness	0.9mm	1mm	1.2mm	1.2mm	1.2mm	1.2mm	1.2mm	1.2mm	1.5mm	1.5mm	1.5mm
筒体重量 Cylinder Weight	0.5KG	0.9KG	1.25KG	1.55KG	1.80KG	2.1KG	2.1KG	2.4KG	2.9KG	3.2KG	3.2KG
材料 Material	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12	St12

干粉灭火器筒体(带脚鼎) / DRY POWDER FIRE EXTINGUISHER CYLINDER (CONVEX FOOT)



型号 Item No.	SWDC-01C	SWDC-02C	SWDC-03C	SWDC-04C	SWDC-4.5C	SWDC-06C	SWDC-09C	SWDC-12C
规格 Capacity	1KG	2KG	3KG	4KG	4.5KG	6KG	9KG	12KG
外径 Out-Dia	90mm	110mm	130mm	130mm	135mm	160mm	180mm	190mm
瓶高 Cylinder Height	250mm	305mm	353mm	410mm	425mm	420mm	500mm	570mm
壁厚 Thickness	0.9mm	1mm	1.2mm	1.2mm	1.2mm	1.2mm	1.5mm	1.5mm
筒体重量 Cylinder Weight	0.5KG	0.9KG	1.25KG	1.55KG	1.8KG	2.1KG	2.9KG	3.6KG
材料 Material	St12	St12	St12	St12	St12	St12	St12	St12



干粉自动（悬挂）灭火器

AUTOMATIC DRY POWDER FIRE EXTINGUISHER



■ 参数

Product Specification

型号/ Item No.	SWDA-03	SWDA-06	SWDA-09	SWDA-012
规格/ Capacity	3KG	6KG	9KG	12KG
外径/ Out-Dia	245mm	270mm	302mm	302mm
瓶高/ Cylinder Height	180mm	205mm	245mm	275mm
温度范围/ Temperature Range	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C
最大工作压力/ MAX W. P	14Bar	14Bar	14Bar	14Bar
测试压力/ Test Pressure	27Bar	27Bar	27Bar	27Bar
材料/ Material	DC01/St12	DC01/St12	DC01/St12	DC01/St12
包装尺寸/ Carton Size	24.5*24.5*26cm/pc	28*28*29cm/pc	31*31*33cm/pc	31*31*35cm/pc
毛重/ Gross Weight	5.1KG	9.0KG	12.5KG	16KG



Tel: 886-2-27040238

P.O. Box 96-10 Taipei, Taiwan

Fax: 886-2-27040177

jimsoar@ms13.hinet.net

WeChat: 86 13262688150

http://www.jimsoar.com



清水&泡沫灭火器

WATER&FOAM FIRE EXTINGUISHER



■ 参数

Product Specification

型号 Item No.	SWWF-01	SWWF-02	SWWF-03	SWWF-04	SWWF-06	SWWF-09	SWWF-10
规格 Capacity	1L	2L	3L	4L	6L	9L	10L
外径 Out-Dia	90mm	110mm	130mm	130mm	160mm	182mm	182mm
瓶高 Cylinder Height	250mm	305mm	350mm	410mm	420mm	500mm	550mm
温度范围 Temperature Range	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C	-30~+60°C
最大工作压力 MAX W.P	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	49*20*33 cm/10pcs	36*24*40 cm/6pcs	45*27*14 cm/2pcs	50*27*14 cm/2pcs	52*33*17 cm/2pcs	19*19*60 cm/pc	19*19*65 cm/pc
毛重 Gross Weight	16.5KG	21KG	10KG	12.8KG	18KG	13KG	14.5KG



不锈钢自动灭火器 / STAINLESS STEEL AUTOMATIC FIRE EXTINGUISHER



型号 Item No.	SWSA-02	SWSA-03	SWSA-4.5	SWSA-06	SWSA-12
筒体尺寸 Cylinder Size	160*162mm	240*190mm	194*255mm	295*208mm	367*262mm
壁厚 Thickness	1mm	1.14mm	1.35mm	2.30mm	2.05mm
材质 Material	SUS304	SUS304	SUS304	SUS304	SUS304
测试/最大工作压力 T.P / MAX.W.P	25/14Bar	25/14Bar	25/14Bar	25/14Bar	25/14Bar
包装尺寸 Carton Size	16.5*16.5*21 cm/pc	24.5*24.5*24 cm/pc	20*20*30.5 cm/pc	30*30*23.5 cm/pc	37*37.5*32 cm/pc
毛重 Gross Weight	3.9KG	5.3KG	7.1KG	9.6KG	17.5KG

不锈钢常规灭火器 / STAINLESS STEEL FIRE EXTINGUISHER



型号 Item No.	SWSS-01	SWSS-02	SWSS-03	SWSS-04	SWSS-06	SWSS-09	SWSS-10	SWSS-12
筒体尺寸 Cylinder Size	88.5*250mm	110*330mm	130*355mm	130*440mm	160*445mm	180*520mm	185*545mm	190*615mm
壁厚 Thickness	1.0mm	1.0mm	1.0mm	1.0mm	1.0mm	1.2mm	1.2mm	1.2mm
包装尺寸 Carton Size	47*19.5*28 cm/10pcs	35*23.5*35.5 cm/6pcs	41*27.5*35.5 cm/6pcs	41*27.5*48 cm/6pcs	50*33.5*47 cm/6pcs	38*38*57 cm/4pcs	39*39*58 cm/4pcs	40*40*59 cm/4pcs
毛重 Gross Weight	7.0KG	7.0KG	8.6KG	10.3KG	12.7KG	13KG	13.2KG	13.5KG



■ 参数

Product Specification

型号 Item No.	SWCO-02	SWCO-2.3	SWCO-03	SWCO-4.5	SWCO-05	SWCO-06	SWCO-6.8	SWCO-07	SWCO-09
规格 Capacity	2KG	2.3KG	3KG	4.5KG	5KG	6KG	6.8KG	7KG	9KG
外径 Out-Dia	114mm	114mm	114mm	152mm	152mm	152mm	159mm	152mm	159mm
瓶高 Cylinder Height	415mm	465mm	585mm	585mm	560mm	660mm	675mm	750mm	860mm
壁厚 Thickness	4mm	4mm	4mm	5mm	5mm	5mm	5mm	5mm	5mm
容积 Volume	3.0L	3.5L	4.5L	6.72L	7.5L	9L	10.2L	10.5L	13.5L
温度范围 Temperature Range	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃	-30~+55℃
最大工作压力 MAX W.P	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar	167Bar
测试压力 Test Pressure	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar	250Bar
材料 Material	CK45	CK45	CK45	CK45	CK45	CK45	CK45	CK45	CK45
包装尺寸 Carton Size	28.5*14*53 cm/2pcs	28.5*14*58 cm/2pcs	28.5*14*71 cm/2pcs	21*16*71 cm/pc	22*17*77 cm/pc	21*16*85 cm/pc	22*18*77 cm/pc	22*17*89 cm/pc	22*18*96 cm/pc
毛重 Gross Weight	16KG	19.6KG	22KG	16.5KG	17.7KG	19.65KG	23.5KG	22.65KG	30KG



推车式干粉&清水&泡沫灭火器

WHEELED DRY POWDER&WATER&FOAM FIRE EXTINGUISHER



■ 参数

Product Specification

型号 Item No.	SWWD-25 SWWF-25	SWWD-30 SWWF-30	SWWD-35 SWWF-35	SWWD-50 SWWF-50	SWWD-70 SWWF-70	SWWD-100 SWWF-100
规格 Capacity	25KG 25L	30KG 30L	35KG 35L	50KG 50L	70KG 70L	100KG 100L
外径 Out-Dia	300mm	270mm	250mm	320mm	350mm	400mm
瓶高 Cylinder Height	650mm	740mm	750mm	877mm	970mm	1030mm
温度范围 Temperature Range	-30+~60°C	-30+~60°C	-30+~60°C	-30+~60°C	-30+~60°C	-30+~60°C
最大工作压力 MAX W.P	14Bar	14Bar	14Bar	14Bar	14Bar	14Bar
测试压力 Test Pressure	25Bar	25Bar	25Bar	25Bar	25Bar	25Bar
材料 Material	St12	St12	St12	St12	St12	St12
包装尺寸 Carton Size	40*60*90 cm/pc	38*55*91 cm/pc	43*47*75 cm/pc	45*59*110 cm/pc	56*50*115 cm/pc	61*52*120 cm/pc
体积 CBM	0.23CBM	0.24CBM	0.24CBM	0.25CBM	0.28CBM	0.32CBM
毛重 Gross Weight	50KG	55KG	65KG	80KG	100KG	160KG



Tel: 886-2-27040238

P.O. Box 96-10 Taipei, Taiwan

Fax: 886-2-27040177

jimsoar@ms13.hinet.net

WeChat: 86 13262688150

<http://www.jimsoar.com>



■ 参数

Product Specification

型号 Item No.	SWTC-10	SWTC-20	SWTC-25	SWTC-50
规格 Capacity	10KG	20KG	25KG	50KG
外径 Out-Dia	152mm	219mm	219mm	219mm
瓶高 Cylinder Height	1030mm	1125mm	1300mm	1300mm
灭火剂重量 Filling Weight	15L	34L	38L	80L
温度范围 Temperature Range	-30~+55°C	-30~+55°C	-30~+55°C	-30~+55°C
最大工作压力 MAX W. P	167Bar	167Bar	167Bar	167Bar
测试压力 Test Pressure	250Bar	250Bar	250Bar	250Bar
材料 Material	CK45	CK45	CK45	CK45
包装尺寸 Carton Size	23*28*1130cm/pc	25*30*1200cm/pc	45*1100*1110 cm/pc	850*1100*1100 cm/pc
毛重 Gross Weight	34KG	38KG	98KG	188KG



BSI EN3认证干粉灭火器 / BSI EN3 CERTIFIED DRY POWDER FIRE EXTINGUISHER



参数

Product Specification

型号 Item No.	SWDPN-01	SWDPN-02	SWDPN-03	SWDPN-04	SWDPN-06	SWDPN-09	SWDPN-12
规格 Capacity	1KG	2KG	3KG	4KG	6KG	9KG	12KG
外径 Out-Dia	85mm	110mm	130mm	130mm	160mm	180mm	188mm
瓶高 Cylinder Height	280mm	315mm	335mm	435mm	444mm	510mm	567mm
筒体重量 Cylinder Weight	0.7KG	1.2KG	1.65KG	2.05KG	2.7KG	3.9KG	4.6KG
材料 Material	DC01	DC01	DC01	DC01	DC01	DC01	DC01
灭火等级 Fire Rate	8A21BC	13A34BC	13A55BC	13A70BC	21A113BC	34A183BC	55A233BC
包装尺寸 Carton Size	29.5*20*36 cm/6pcs	25*25*42 cm/4pcs	14.5*14*45 cm/pc	14.5*14*54 cm/pc	17.5*17*55.5 cm/pc	19.5*19*62 cm/pc	20*20*67.5 cm/pc
毛重 Gross Weight	13KG	15.8KG	6.2KG	7.8KG	10.3KG	14.7KG	17 KG





CE认证干粉灭火器 / CE CERTIFIED DRY POWDER FIRE EXTINGUISHER



参数

Product Specification

型号 Item No.	SWDPE-01	SWDPE-02	SWDPE-03	SWDPE-04	SWDPE-06	SWDPE-09
规格 Capacity	1KG	2KG	3KG	4KG	6KG	9KG
外径 Out-Dia	85mm	110mm	128mm	138mm	160mm	180mm
瓶高 Cylinder Height	280mm	315mm	318mm	359mm	444mm	510mm
材料 Material	DC01	DC01	DC01	DC01	DC01	DC01
筒体重量 Cylinder Weight	0.7KG	1.2KG	1.65KG	2.05KG	2.7KG	3.9KG
包装尺寸 Carton Size	29.5*20*36 cm/6pcs	25*25*42 cm/4pcs	14.5*14*45 cm/pc	14.5*14*54 cm/pc	17.5*17.5* 55.5cm/pc	19.5*19*62 cm/pc
毛重 Gross Weight	13KG	15.8KG	6.2KG	7.8KG	10.3KG	14.7KG



BSI EN3 认证 CO2灭火器 / BSI EN3 CERTIFIED CO2 FIRE EXTINGUISHER



参数
Product Specification

型号 Item No.	规格 Capacity	外径 Out-Dia	瓶高 Cylinder Height	材料 Material	最小壁厚 Min Wall-thickness	灭火等级 Fire Rate	包装尺寸 Carton Size	毛重 Gross Weight
SWCEN-02	2KG	116mm	385mm	A6061	2.38mm	34B	53*17*14 cm/pc	8.6KG
SWCEN-05	5KG	136mm	600mm	A6061	2.90mm	89B	75*20*15 cm/pc	17.5KG

CE 认证 CO2灭火器 / CE CERTIFIED CO2 FIRE EXTINGUISHER



参数
Product Specification

型号 Item No.	规格 Capacity	外径 Out-Dia	瓶高 Cylinder Height	材料 Material	最小壁厚 Min Wall-thickness	灭火等级 Fire Rate	包装尺寸 Carton Size	毛重 Gross Weight
SWCCE-02	2KG	104mm	485mm	34CrMo4	2.38mm	34B	17*13*52 cm/pc	8.6KG
SWCCE-05	5KG	136mm	650mm	34CrMo4	2.90mm	89B	21.5*15*76.5 cm/pc	17.5KG



CE/BSI EN3 认证灭火器
CE/BSI EN3 CERTIFIED FIRE EXTINGUISHER

BSI EN3 & CE 认证泡沫灭火器 / BSI EN3 & CE CERTIFIED FOAM FIRE EXTINGUISHER



型号/ Item No.	SWWF-01	SWWF-02	SWWF-06	SWWF-09	SWFS-06	SWFS-09
规格/ Capacity	1L	2L	6L	9L	6L	9L
外径/ Out-Dia	85mm	110mm	162mm	184mm	180mm	180mm
瓶高/ Cylinder Height	270mm	317mm	448mm	519mm	400mm	545mm
材料/ Material	DC01	DC01	DC01	DC01	SUS304	SUS304
灭火等级/ Fire Rating	13A 144B	21A 233B	13A 144B	21A 144B	13A 144B	21A 144B
包装尺寸/ Carton Size	21*20.5*37 cm/4pcs	42.5*27*44 cm/6pcs	17*17*57.5 cm/pc	19.5*19.5*62 cm/pc	19*19*51 cm/pc	19*19*65.5 cm/pc
毛重/ Gross weight	10.5KG	14KG	10.3KG	15KG	9.89KG	13.5KG

药剂灭火器 / WET CHEMICAL FIRE EXTINGUISHER



型号 Item No.	规格 Capacity	外径 Out-Dia	温度范围 Temperature Range	最大工作压力 MAX W.P	测试压力 Test Pressure	材料 Material	包装尺寸 Carton Size	毛重 Gross Weight
SWWC-02	2L	150mm	5°C~60°C	13.5Bar	27Bar	DC01	40*11.5*20 cm/pc	9.25KG
SWWC-06	6L	162mm	5°C~60°C	13.5Bar	27Bar	DC01	57*17*17.5 cm/pc	13.25KG



BSI EN3 & CE认证 清水灭火器 / BSI EN3 & CE CERTIFIED WATER FIRE EXTINGUISHER



■ 参数

Product Specification

型号/ Item No.	SWW-06	SWW-09	SWS-06	SWS-09
规格/ Capacity	6L	9L	6L	9L
外径/ Out-Dia	162mm	184mm	162mm	184mm
瓶高/ Cylinder Height	448mm	519mm	448mm	519mm
材料/ Material	St12	St12	SUS304	SUS304
灭火等级/ Fire Rating	13A 144B	21A 144B	13A 144B	21A 144B
包装尺寸/ Carton Size	17.5*17*56.5cm/pc	20.5*20*63.5cm/pc	19*19*51cm/pc	19*19*56.5cm/pc
毛重/ Gross weight	10.3KG	14.5KG	9.89KG	13.5KG



CE/SGS认证球形灭火器 / CE/SGS CERTIFIED FIRE EXTINGUISHER BALL



0.8KG



0.5KG & 1.3KG



1.35KG & 4KG

型号 Item No.	SWFB-01	SWFB-02	SWFB-03	SWFB-04	SWFB-05	SWFB-06
材料 Material	90% ABC dry powder(Nontoxic)	90% ABC dry powder(Nontoxic)	90% ABC dry powder(Nontoxic)	90% ABC dry powder(Nontoxic)	90% ABC dry powder(Nontoxic)	90% ABC dry powder(Nontoxic)
重量 Weight	0.8	0.8	0.5	1.3	1.35	4
反应时间 Automatic Reaction Time	≤3s	≤2s	≤3s	≤3s	≤2s	≤2s
颜色 Color	Yellow	Purple	Yellow	Yellow	Red	Red
包装尺寸 Carton size	47x32x33cm	47x32x33cm	54x27.5x54.5cm	56x38x38.5cm	57x37x37.5cm	50x50x25cm
20尺柜容量 20GP Loading Quantity	12552	12552	10272	3804	3936	1664
有效期 Validity Period	5 years	5 years	5 years	5 years	5 years	5 years





- Product Code: SY-112000
- Inlet Thread: M30x1.5
- Outlet Thread: M14x1.5
- Gauge Connection Thread: M10x1-12.5
- Dip Tube Thread: M16x1.5
- Safety Device: No



- Product Code: SY-131000
- Inlet Thread: M30x1.5
- Outlet Thread: M16x1.5
- Gauge Connection Thread: M10x1-12.5
- Dip Tube Thread: M16x1.5
- Safety Device: No



- Product Code: SY-143000
- Inlet Thread: M30x1.5
- Outlet Thread: M16x1.5
- Gauge Connection Thread: M10x1-12.5
- Dip Tube Thread: M16x1.5
- Safety Device: 2.1-2.6



- Product Code: SY-132000
- Inlet Thread: M30x1.5
- Outlet Thread: G1/8-28
- Gauge Connection Thread: M10x1-12.5
- Dip Tube Thread: M16x1.5
- Safety Device: 2.1-2.6



- Product Code: SY-145000
- Inlet Thread: PZ25.4
- Outlet Thread: M22x1.5
- Dip Tube Thread: M10x1
- Pressure MPA: 18.5-23
- Wall Hanging Type: No



- Product Code: SY-113000
- Inlet Thread: PZ27.8
- Outlet Thread: W21.8
- Dip Tube Thread: M10x1
- Pressure MPA: 18.5-23
- Wall Hanging Type: No



- Product Code: SY-184000
- Inlet Thread: M30x1.5
- Outlet Thread: M14x1.5
- Gauge Connection Thread: M10x1-12.5
- Dip Tube Thread: M14x1.5
- Safety Device: 2.1-2.6



- Product Code: SY-193000
- Inlet Thread: NPT3/4
- Outlet Thread: G1/4
- Dip Tube Thread: M14x1.25
- Pressure MPA: 18.5-23
- Wall Hanging Loop: Yes





- Product Code: SY-116000
- Inlet Thread: G2"
- Outlet Thread: G3/4
- Gauge Connection Thread: M10x1-12.5
- Dip Tube Thread: G3/4
- Safety Device: 2.1-2.6



- Product Code: SY-117000
- Inlet Thread: PZ27.8
- Outlet Thread: W21.8
- Dip Tube Thread: M10x1
- Pressure MPA: 18.5-23
- Wall Hanging Type: No



<p>Gauges 1</p> 	<p>Manometers 2</p> 	<p>Dip Tube</p> 	<p>Safety Seals&Pin</p> 
<p>Binding</p> 	<p>Bracket</p> 	<p>Wall Hook</p> 	<p>Hose</p> 
<p>CO2 Hose&horn</p> 	<p>Nozzle</p> 	<p>Foam spray Gun -1 (wheeled type)</p> 	<p>Powder spray Gun-2 (wheeled type)</p> 
<p>Neck Ring</p> 	<p>Dry Powder & Foam</p> 	<p>Upright & Pendent Sprinkler</p> 	<p>UL Certified Sprinkler</p> 



Application: Fire-fighting, Shipping, Petroleum, Chemical industry, Agriculture, Mining.

Type	Single Jacket	Double Jacket	Durable Hose		
Structure					
Picture					
Grain of the Jacket	 Polyester Filament/Twill	 Double Jackets	 Polyester Staple/plain	 Polyester Staple/Twill	 Coating/Twill
Lining	Rubber, EPDM, PVC, TPU				
Color	White, yellow, red, or as per customer's instruction				
Standard	GB6246, MED, EN14540, FM, UL				

Pressure Required

口径 Diameter		工作压力 Working Pressure			爆破压力 Bursting Pressure		
Inch	mm	Bar	Mpa	Psi	Bar	Mpa	Psi
1"	25	13-25	1.3-2.5	190-365	39-75	3.9-7.5	570-1090
1-1/4"	32	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
1-1/2"	38	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
1-3/4"	45	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
2"	52	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
2-1/2"	64	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
2-3/4"	70	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
3"	75	8-25	0.8-2.5	120-365	24-75	2.4-7.5	350-1090
4"	102	8-16	0.8-1.6	120-235	24-48	2.4-4.8	350-700
5"	127	8-13	0.8-1.3	120-190	24-39	2.4-3.9	350-570
6"	152	8-13	0.8-1.3	120-190	24-39	2.4-3.9	350-570



■ 德式接扣 / Storz Coupling (Copper / Aluminum)

Product Number	Inlet	Outlet
SWSC-01	1.5" Storz	Φ38
SWSC-02	1 3/4" Storz	Φ44.5
SWSC-03	2" Storz	Φ51
SWSC-04	2.5" Storz	Φ63.5



■ 英式接扣 / John Morris Coupling (Copper / Aluminum)



Product Number	Inlet	Outlet
SWBC-01	1.5" BS336	Φ38
SWBC-02	2" BS336	Φ38 & Φ51
SWBC-03	2.5" BS336	Φ38 & Φ51
SWBC-04	2.5" BS336	Φ63.5

■ 叮嚀式接扣 / Michino Coupling (Copper / Aluminum)

Product Number	Inlet	Outlet
SWMC-01	1.5"	Φ38
SWMC-02	2"	Φ51
SWMC-03	2.5"	Φ38 & Φ51
SWMC-04	2.5"	Φ63.5



■ 中島式接扣 / Nakajima Coupling (Copper / Aluminum)



Product Number	Inlet	Outlet
SWNC-01	1.5" NH	Φ38
SWNC-02	2" NH	Φ51
SWNC-03	2.5" NH	Φ44.5 & Φ51
SWNC-04	2.5" NH	Φ63.5



■ 美式接扣 / ANSI Coupling (Copper / Aluminum)



Product Number	Inlet	Outlet
SWAC-01	1.5"NH	Φ38
SWAC-02	2"NH	Φ51
SWAC-03	2.5"NH	Φ44.5 & Φ51
SWAC-04	2.5"NH	Φ63.5

■ 连接接头 / Connection Coupling (Copper / Aluminum)

Product Number	Inlet	Outlet
SWC-01	F2.5"NH	2.5"BS336
SWC-02	F1.5"BSP	2.5"BS336
SWC-03	F2"BSP	2.5"BS336
SWC-04	F2.5"BSP	2.5"BS336



■ 焖盖 / Storz Cap (Copper / Aluminum)



Product Number	Inlet	Outlet
SWC-01	F2.5"NH	2.5"BS336
SWC-02	F1.5"BSP	2.5"BS336
SWC-03	F2"BSP	2.5"BS336
SWC-04	F2.5"BSP	2.5"BS336

■ 子母扣 / Male and Female Fittings (Copper / Aluminum)

Product Number	Inlet	Outlet
SWM-01	1.5" Storz	F1.5" BSP
SWM-02	2" Storz	F2"BSP
SWM-03	2.5" Storz	F2.5"BSP
SWF-01	1.5" Storz	1.5"BSP
SWF-02	2" Storz	1.5"BSP / 2"BSP
SWF-03	2.5" Storz	2.5"BSP





■ Landing Valve (Oblique and Angle)



Product Number	Inlet	Outlet
SWLV-O01	2.5" BSPT	2.5" BS336
SWLV-A02	1.5" & 2.5" BSP	Machino

■ Landing Valve with Flange (Oblique and Angle)

Product Number	Inlet	Outlet
SWLVF-O01	2.5" BSP	2.5" BS336
SWLV-A02	2.5" BSP	2.5" BS336



■ Angle Valve

Product Number	Inlet	Outlet
SWB-01	1.5" NPT	100mm
SWB-02	2.5" NPT	150mm

■ Breeching

Product Number	Inlet	Outlet
SWB-01	2×2.5" BS336	100mm
SWB-02	4×2.5" BS336	150mm



2-way Breeching

4-way Breeching

■ Fire Hydrant



Product Number	Inlet	Outlet
SWP-01	100mm	2×2.5" BS336
SWP-02	100mm	2×Φ65mm
SWP-03	100mm	2×2.5" BSP+4" BSP

Branch Pipe Series



Jet/Spray Nozzle Series



Adjust Flow Nozzle Series



Storz



John Morris



ANSI

Type	Size	Flow Rate	Max Flow Distance
Storz	1.5"	130-250-280-300-450LPM	>30M
John Morris	2"		
ANSI	2.5"		

Remark: Russian, French, Italian, Nakajima and Michino type are available.



SW-FR-01 	SW-FR-02 	SW-FR-03 
SW-FR-04 	SW-FR-05 	SW-FR-06 

Accessories



Fire Hose Reel Nozzle



型号 Product No.	规格 Capacity	类型 Type	盘片尺寸 Plate Size	胶管规格 Size of Hose	额定工作压力 W.P.	包装尺寸 Packing	有效射程 Effect Range
SW-FR-01	3/4"x30m	Automatic	Φ480	Φ19	12Bar	56*55.5*20cm	≥10m
SW-FR-02			Φ525			60*59*23.5cm	≥10m
SW-FR-03	1"x30m	Fixed	Φ550	Φ25		60*59*23.5cm	≥10m
SW-FR-04	1-1/4"x30m	Manual	Φ585	Φ30		56*55.5*20cm	≥10m
SW-FR-05			Φ600			56*55.5*20cm	≥10m
SW-FR-06			60*59*23.5cm			≥10m	



SWHR-01



SWHR-02

Product Number	Material	Size
SWHR-01	mild steel	750×750×250mm
SWHR-02	mild steel, fiber glass	650×650×220mm
SWHR-03	mild steel	1000×1000×500mm

Product Number	Material	Size
SWER-S01	mild steel, fiber glass	1050×800×240mm
SWER-S02	stainless steel, fiber glass	1050×750×280mm
SWER-S03	mild steel	1500×750×280mm



SWER-S01



SWER-S02



SWER-S03



SWFE-S01



SWFE-S02



SWFE-P01/ 02 / 03/ 04

Product Number	Material	Size
SWFE-S01	mild steel	600×250×230mm
SWFE-S02	plastic	720×270×250mm
SWFE-P01	plastic	670×330×230mm
SWFE-P02	plastic	700×300×253mm
SWFE-P03	plastic	830×310×263mm
SWFE-P04	plastic	715×540×270mm



Fireman Suit



Safety Gumboot



Safety Vest



Safety Glove



Fire Blanket



Smoke Detector



Fire Escape Mask



Fire Bucket & Axe



Stand and Trolley



Dry Powder Filling Machine



Nitrogen Filling Machine



CO2 Filling Machine



Gas Tight Test Tank



Manual Extinguisher Disassembling Bench



Electric Heat Automatic Dry Machine



Water Filling Machine





JIMSOAR INTERNATIONAL CORP.,

P. O. BOX 96 - 10 TAIPEI, TAIWAN, REPUBLIC OF CHINA

Mobile: 886-937-142951 Tel: 886-2-27040238 Fax: 886-2-27040177

WeChat: 86-13262688150

QQ: 859722046

e-mail: jimsoar@ms13.hinet.net

<http://www.jimsoar-co.com>