

Wall Panel SYSTEMS




PAC-CLAD.COM




PAC-CLAD[®]

P E T E R S E N


A **CARLISLE** COMPANY

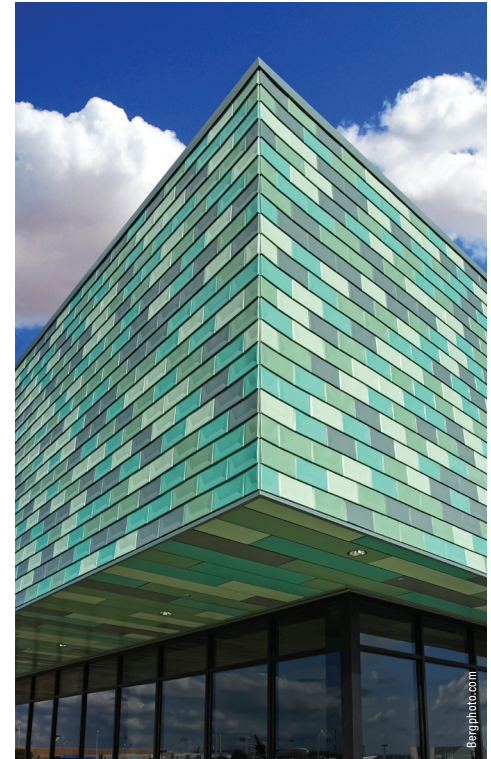


Precision Series HWP, Highline and Box Rib




HWP
WITH OR WITHOUT CLIP




HIGHLINE B1
WITH OR WITHOUT CLIP




HIGHLINE B2
WITH OR WITHOUT CLIP



HIGHLINE C1
WITH OR WITHOUT CLIP



HIGHLINE C2
WITH OR WITHOUT CLIP




HIGHLINE M1
WITH OR WITHOUT CLIP




HIGHLINE S1
WITH OR WITHOUT CLIP

Note: Minimum panel length is 5'




HIGHLINE S2
WITH OR WITHOUT CLIP


Note: Minimum panel length is 5'




BOX RIB 1
WITH OR WITHOUT CLIP



BOX RIB 2
WITH OR WITHOUT CLIP



BOX RIB 3
WITH OR WITHOUT CLIP




BOX RIB 4
WITH OR WITHOUT CLIP




Note: Line drawings are not to scale.



Flush and Reveal



FLUSH PANEL



REVEAL PANEL




Stocked Colors	
AL	
.032	36
.040	22
STEEL	
24 GA.	43
22 GA.	16


- ▶ Available with up to two pencil ribs
- ▶ Rounded interlock leg provides improved flush kit
- ▶ Optional clips available for Miami-Dade wind resistance requirements
- ▶ 30-year non-prorated finish warranty
- ▶ Panel lengths from 4' to 25'
- ▶ Galvalume Plus available

Testing Available at PAC-CLAD.COM


Precision Series Tiles



CUPPED



FLAT



DIAMOND

Stocked Colors	
AL	
.032	36
STEEL	
24 GA.	43


- ▶ .032 anodized available
- ▶ Zalmag® coated steel (26 gauge) available (Sold only in Florida and Texas)
- ▶ 30-year non-prorated finish warranty
- ▶ May be used for both wall and roof applications
- ▶ No sealant is required

Stocked Colors	
AL	
.032	36
.040	22
.050	29
STEEL	
24 GA.	43
22 GA.	16


- ▶ Highline S-2 is only available in .050 aluminum and 22 gauge steel
- ▶ No-clip panel, or clip installation for expansion/contraction
- ▶ Multiple rib patterns provide a variety of looks and design options
- ▶ Panel depths of 7/8" or 1-3/8"
- ▶ Cost-effective installation
- ▶ Horizontal or vertical installation
- ▶ Micro-seam corners available
- ▶ Galvalume Plus available
- ▶ Aluminum panels may be perforated
- ▶ Panel lengths: 30' maximum for steel; 22' maximum for aluminum on the thru-fastened leg; longer lengths available on clip panels

Testing Available at PAC-CLAD.COM

Modular AL



MODULAR AL



DESIGN CONFIGURATIONS



Running Bond

Stacked

Mosaic



Depth Range
1 3/8-in.
to 3-in.




Stocked Colors	
AL	
.050	36
.063	22
.080	29



- ▶ Flat or tapered
- ▶ No sealants
- ▶ Concealed fasteners
- ▶ Easy installation
- ▶ Can be perforated
- ▶ Custom Sizes
- ▶ 30-year finish warranty
- ▶ Made of 100% recycled aluminum
- ▶ Full fabrication package on all projects
- ▶ Weep holes for pressure and moisture venting
- ▶ Mix and match panel depths and sizes
- ▶ Stacked and running bond designs available

Testing Available at PAC-CLAD.COM



Exposed Fastener




7.2 PANEL




R-36 PANEL



M-42 PANEL*




Note: Made only in Tyler, Texas facility



7/8" CORRUGATED




M-36 PANEL*



*Note: The M-36 and M-42 panels are not intended for use in the construction of metal buildings or structural roof applications. Please consult with Petersen regarding the application of this panel.

1/2" CORRUGATED



Stocked Colors	
Al	
.032	36
.040	22
.050	29
STEEL	
24 GA.	43
22 GA.	16

- ▶ 30-year non-prorated finish warranty
- ▶ Matching screws and rivets
- ▶ Closure strips available
- ▶ Precut short lengths (5'-0" minimum) (3'-0" on the M-42)

Perforation



EXAMPLE


PERFORATED 7.2 PANEL

Petersen offers perforation of select PAC-CLAD metal wall panels and flat sheet. Perforated panels and metal can provide a contrasting look with any non-perforated metal or other building material to create visual interest on any project. Architects can specify perforated aluminum and copper to diffuse light, air or sound, or simply for architectural flair. Typical applications include equipment screens, partitions, sign panels, parking



decks, guards, interior acoustical applications and enclosures of any kind.

Perforation is available in a nearly endless combination of hole sizes, spacing and open space percentages to complement virtually any architectural design or need. Perforation options will vary by panel profile and metal thickness. Consult factory for details.


Composite



PAC-3000 CS



PAC-3000 RS

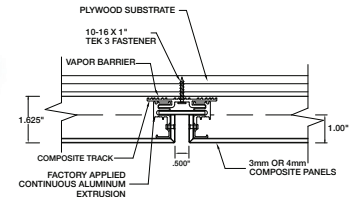

Stocked Materials	
3mm, 4mm, 6mm Composite	
.063-.125 Mill Finish Aluminum	
Zinc and Stainless Steel	
Anodized Aluminum	

- ▶ Available in a wide variety of non-PAC-CLAD colors and finishes
- ▶ Precise fabrication to meet exacting tolerances

- ▶ Rout-and-return fabrication
- ▶ Welded corners available

Testing Available at PAC-CLAD.COM



800-PAC-CLAD | PAC-CLAD.COM



1005 Tonne Road
Elk Grove Village, IL 60007
P: 800-PAC-CLAD
F: 800-722-7150

9060 Junction Drive, Suite 1
Annapolis Junction, MD 20701
P: 800-344-1400
F: 301-953-7627

10551 PAC Road
Tyler, TX 75707
P: 800-441-8661
F: 903-581-8592

102 Northpoint Parkway
Acworth, GA 30102
P: 800-272-4482
F: 770-420-2533

1800 S. 7th Ave., Suite 130
Phoenix, AZ 85007
P: 833-750-1935
F: 602-254-6504

9817 233rd Ave. E., Suite A
Bonney Lake, WA 98391
P: 253-501-2450