




SET UPS

2mm negative camber per side


Dry conditions: 4mm of negative camber total left and right

Wet conditions: 0mm camber

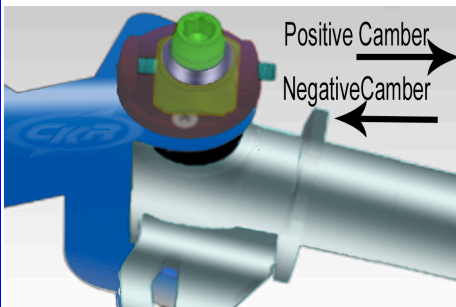

Dry conditions: 1 line of positive caster per side

Wet conditions: 4 lines of positive caster per side

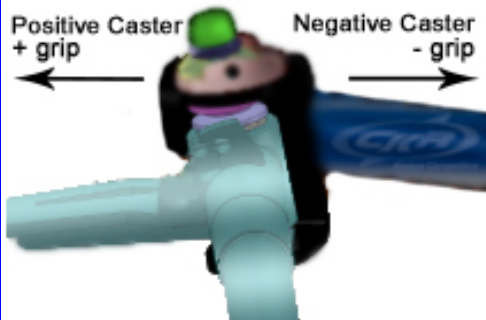

Dry conditions: Use the kart in the low position and the stub axle in the high position

Wet conditions: Use the kart in the high position and the stub axle in the low position

