

Perfect control over your lighting with

# PROSPORTLED



Our Platform Tennis lighting is for those who appreciate the difference. Small details matter. ProSportLED is dedicated to getting the details right and enhancing the performance of Paddle players while minimizing light pollution in neighboring areas with Asymmetric LED lighting technology.

We have partnered with [‘The Paddle Lab’](#) to offer the best in Platform Tennis lighting and outstanding customer service. For more information on our Sport Lighting products visit [ProSportLED](#)

## Contact:

**National**

**Telephone:** (888) 280 9666

**Email:** [info@prosportled.com](mailto:info@prosportled.com)

**Pennsylvania/Delaware/New Jersey**

**Telephone:** (610) 247 7062

**Email:** [thepaddlelab@gmail.com](mailto:thepaddlelab@gmail.com)

Application: Platform Tennis

Certifications: UL CE DLC



### Description

Unrivaled Efficacy 150 lm/W  
Excellent Cooling Structure  
Wireless Lighting Control / Built-in 20KV Surge Protection Device


### Specifications

Model Name	MA200 Plus	
Power Consumption	200W	
Light Source	0.2W Mid Power LED Chips (Qty : 840 pcs)	
Correlated Color Temperature	5000K (4000K available)	
Luminous Flux *	30,000 lm	
Luminous Efficacy *	150 lm/W	
LED Driving Current *	77 mA	
Color Rendering Index	80 Ra	
Light Distribution	Asymmetric Wide	
BUG Rating	B3 - U2 - G4	
LED Chip Manufacturer	SAMSUNG	
Input Voltage	100 ~ 277 Vac 120 ~ 277 Vac 347 ~ 480 Vac	
Input Current	Max 2.5A (@100Vac) Max. 0.75A (@347Vac)	
Power Factor	≥0.9 at Max load	
Frequency	50 / 60 Hz	
Surge Protection	Line-Line 20KV, Line-FG 20KV	
Driver Type	Constant Current (CC)	
Fixture & Driver Manufacturer	GigaTera Inc. / Made in Korea	
Size ( W x L x H )	13.7 x 16.2 x 9.5 (inch)	347 x 412 x 242 (mm)
Weight (Driver included)	16.6 lb	7.5 Kg
Material	Body	Cast Aluminum
	Optic	AL Coating Reflector
	Cover	Tempered Glass 4.0T (Clear)
Finish	Powder Coating	
IP Rating	IP66	
Mounting Option	Swivel Bracket / Pole Mount / Mount Bracket	
Operating Temperature	-22°F ~ 131°F	-30°C ~ 55°C
Warranty	10 Years	

### Option

Control System	Wireless (ZigBee) / NEMA-7
----------------	----------------------------

### Photometry

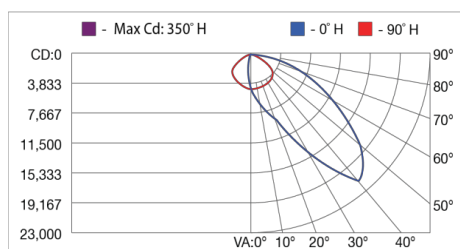

[ 5000K]

\*Tolerance : ±5%

Size	347 x 412 x 242 (mm)
	13.7 x 16.2 x 9.5 (inch)