






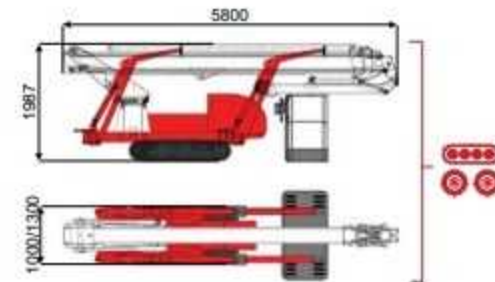

22,3 m ↑  
10,3 m →  
250 Kg

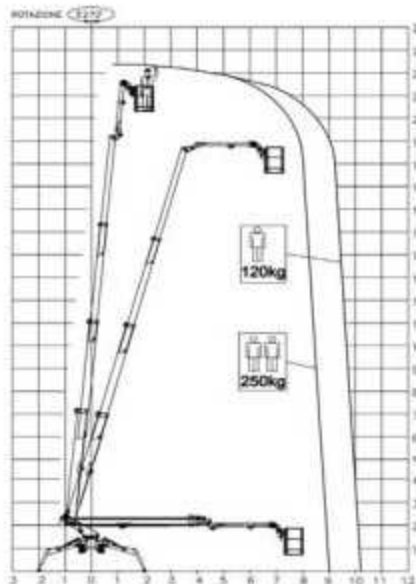

9000 mm	10200 mm	8800 mm	L1	L2	W1	W2	W3
250 kg	120 kg	120/250 kg	4900 mm	6250 mm	4350 mm	3350 mm	2750 mm

BI-ENERGY Diesel+AC	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	Icon 7	Icon 8	Icon 9	Icon 10	Icon 11	Icon 12	Icon 13	Icon 14	Icon 15	Icon 16	Icon 17	Icon 18
TSJ 23.1/C-R	22.3 m	10.3 m	250 kg	175°	540°	150x70 cm	90°+80°	2,75-4,35 m	36%	25%	2,25 km/h	3100 kg	19 kN	1,56 kN/m <sup>2</sup>	3,26 kN/m <sup>2</sup>	1000/1300 mm	5817 mm	1970 mm

	Battery type	Battery charge	Add. Weight	Autonomy	Charging time	Electropump
<b>ECO DC+AC</b>	48V 320 A/h 5h	230V-48V 45A	450 kg	6-7 h endless	7h	48V 12 kW
<b>ECO DC+AC</b>	48V 270 A/h 5h	230V-48V 45A	400 kg	6-7 h endless	7h	48V 9 kW
<b>HYBRID Diesel+DC</b>	24V 240 A/h 5h	230V-24V 35A	200 kg	2-3 h endless	7h	24VD 3 kW

Characteristics and technical data are informative only and subjected to change without notice.