




## 2017 + Flag Mount Extension Bracket Installation Instructions

Thank you for your support! These flag mount extension brackets are designed to be placed in the existing mounting hole on the rear; or front; outer side of the roll hoops to extend the flags outside of the roll hoops. These are only necessary if you have existing mods; luggage racks, wind restrictors, travel bags, etc.; that will not allow direct mounting to the roll hoops. The flag mounts themselves are identical to my other kits and still supports a 6"x9" flag (sleeve style)(sold separately)and are hand made entirely of steel for unrivaled durability. The shaft of the poles are lined with rubber to offer protection for your flag and will provide years of joy flying your flags.

Package Contents (Set):

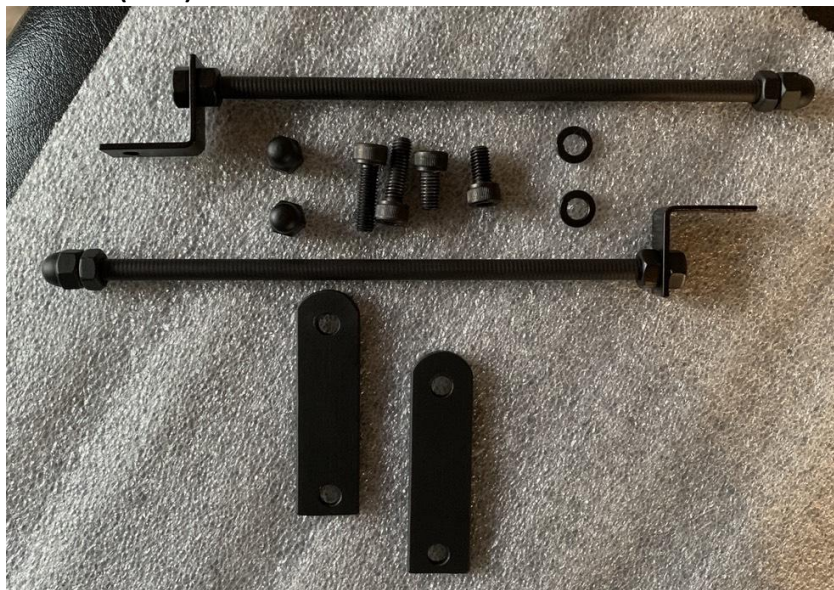

- 2 Flag Poles with Mounts
- 2 ¼ 20 Acorn Nuts
- 2 ¼ 20 Hex Nuts
- 2 M6 x 20mm Socket Head Cap Screws (5mm Drive)
- 2 M6 x 10mm Socket Head Cap Screws (5mm Drive)
- 2 M6 Split Lock Washers
- 2 M6 Acorn Nuts
- 2 2.75" Extension Brackets

1. Place M6 x 20mm screw through hole on rounded end of extension bracket.

2. Use one M6 split lock washer and place on M6 screw in previous step; between the extension bracket and roll hoop mounting hole.

3. Tighten M6 x 20mm screw using 5mm allen wrench to roll hoop; ensuring bracket is level.

4. Take one flag pole with mount and place M6 x 10mm screw through mounting hole. Tighten screw with supplied M6 acorn nut; ensure flag pole is at desired angle.

**NOTE:** The bottom edge of the flag pole mount should align evenly with the bottom edge of the extension bracket. If not, the extension bracket will need to be flipped so that the opposite side is in towards roll hoop. Also, the flag pole should be mounted to the extension bracket so that the pole is even with the roll hoop. For better results, place the M6 x 12mm screw in the same direction as the M6 x 20mm screw used previously.

5. Remove ¼ 20 acorn nut and ¼ 20 hex nut from flag pole assembly.

6. Slip flag onto pole and reinstall ¼ 20 nut and acorn nut; tighten acorn nut to hex nut using 7/16<sup>th</sup> wrench (es).

- Prior to installing ¼ 20 nut and acorn nut, check upper sleeve of flag to ensure it is unable to slip over nut. If so, use thread to decrease sleeve hole on flag.

7. Repeat on other side (if applicable).

8. Enjoy!

Congratulations, you have just installed your Flag Mounts. My goal is to provide a superior product to the Slingshot Community and all feedback is appreciated. Please feel free to reach out to me directly with any issues or concerns via phone call, text message, or e-mail. Thank you again for supporting DS Designs.

