



West Valley Amateur Radio Club
6 January 2020

Getting Started with Amateur Satellites, and



by Patrick Stoddard



/



AMSAT Ambassador, Radio Amateur Satellite Corporation (AMSAT)

Working satellites, in the past...

- Multiple radios required to work satellites
 - All-mode monoband transceivers
 - HF transceivers with transverters or up/downconverters
- Satellite-ready transceivers – these were expensive
- SSB/CW, maybe SSTV and RTTY
- Satellites in low and high orbits
 - High-orbit satellites provided intercontinental DX for hours at a time
 - Low-orbit satellites also available, 10 to 30 minutes per pass
- No real easy and inexpensive starting point
 - i.e., no equivalent to used transceiver and dipole for HF

Working satellites, today...

- More multiband satellite-ready transceivers available
- Monoband all-mode transceivers still an option
- HF/VHF/UHF all-mode transceivers also useful for satellite work
- SDR – transceivers, receivers, even some USB dongles!
- For FM satellites, many 2m/70cm FM transceivers (HTs and mobiles) are suitable for satellite work
- Current satellites in low orbit, 10 to 20 minutes per pass, many modes (FM, SSB, CW, SSTV, packet/APRS, other digital modes)
- Some DXpeditions include a satellite station, once again...
 - K1N in 2016, CY9C in 2016 & 2019, HC8LUT in 2017, VY0ERC in 2018 & 2019
- Although satellite DXCC is difficult from many locations, other awards available, including:
 - ARRL VUCC, WAS
 - AMSAT awards
 - CQ magazine awards


Equipment for FM satellites

- Satellite-ready transceivers like IC-9100, IC-9700, TS-2000, etc.
- 2m/70cm FM transceivers with two VFOs capable of cross-band repeat ideal for FM satellite operation
 - One HT capable of cross-band full-duplex operation for all current FM satellites (Kenwood TH-D72A); a couple of others work full-duplex with FM satellites using a 70cm uplink (Wouxun KG-UV8D, KG-UV9D)
 - More options with mobile transceivers (TM-D710GA, TM-V71A, FTM-400XDR, IC-2730A, ID-5100A currently in production)
- Other 2m/70cm FM HTs and transceivers with “odd-split” memory channels can also be used with FM satellites, but not recommended
 - Most Kenwood and Yaesu 2m/70cm transceivers, including several Yaesu HF/VHF/UHF transceivers in current production (FT-817, FT-857, FT-991A); some older Icom 2m/70cm transceivers
- IC-706Mk2, IC-706Mk2G, IC-7000, IC-7100, FT-100, FT-817, FT-818, FT-857, FT-897, FT-991/A, etc. usable with split-VFO operation
- Separate 2m and 70cm FM transceivers (HTs or FM mobiles)

Antennas

- Portable operation
 - Directional antennas
 - Handheld Yagis or log periodics are popular options, homebrew or commercially-made
 - Replace stock “duckie” on HTs
 - Telescoping whip or longer “duckie” may work with some FM satellites & ISS
- Fixed operation
 - Directional antennas
 - 1/4-wave verticals
 - Horizontal loops, 1/4-wavelength over ground plane
 - “Eggbeater” omnidirectional antennas
 - Computer control of antenna rotator desirable, preamps may be necessary for omnidirectional antennas

Minimal FM satellite station

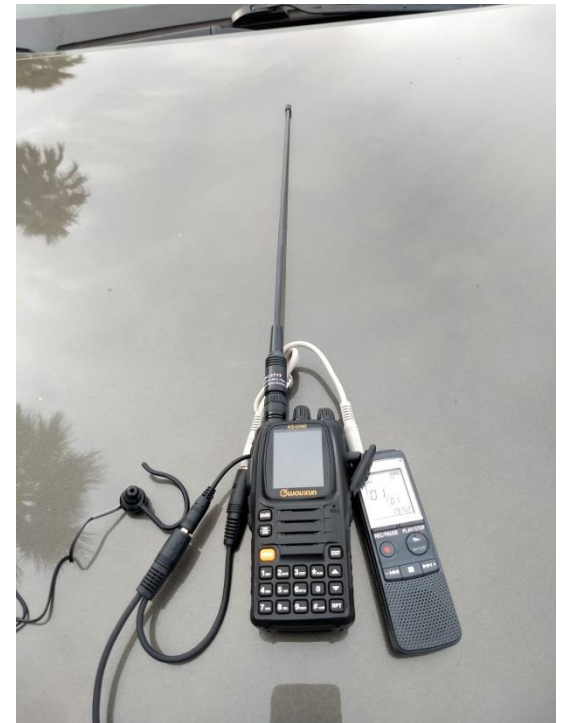

WD9EWK with a Wouxun KG-UV9D and MFJ-1717 whip, with an earpiece and Sony audio recorder connected to HT, to work AO-91 full-duplex

FM satellite station, on the cheap...



Baofeng UV-5R and homebrew 2m/70cm Yagi (courtesy XE3AA)

FM satellite station with 2 radios



Baofeng UV-82, Baofeng UV-5R, Elk log periodic, 2m/70cm diplexer

FM satellite station with 2 radios

(closeup)



Baofeng UV-82 as TX, Baofeng UV-5R as RX

WD9EWK's small ground station!

Yaesu FT-817ND, SDRplay software defined receiver, 8-inch Windows 10 tablet with HDSDR, & Elk Antennas 2m/70cm handheld log periodic antenna = small, very portable, all-mode ground station!



FM satellites

- AO-91 (Fox-1B), launched in November 2017
 - Uplink on 435.250 MHz (+/- 10 kHz, 67.0 Hz CTCSS optional)
 - Downlink on 145.960 MHz
 - Slow-speed telemetry sent w/FM downlink, sometimes replaced by high-speed telemetry – both readable with Fox telemetry software
 - Larger footprint than other FM satellites, very popular!

- AO-92 (Fox-1D), launched in January 2018
 - Two uplinks, one operational at any time
 - 70cm uplink on 435.350 MHz (+/- 10 kHz, 67.0 Hz CTCSS optional)
 - 23cm uplink on 1267.360 MHz (+/- 30 kHz, 67.0 Hz CTCSS optional)
 - Downlink on 145.880 MHz
 - Camera experiment from Virginia Tech; pictures transmitted from AO-92 on 145.880 MHz downlink using 9600bps data
 - Slow-speed telemetry sent w/FM downlink, sometimes replaced by high-speed telemetry – both readable with Fox telemetry software

FM satellites

- SO-50, launched in 2001
 - uplink on 145.850 MHz (67.0 Hz CTCSS required)
 - downlink on 436.795 MHz (+/- 10 kHz for Doppler)
 - activate satellite for 10 minutes by transmitting on 145.850 MHz with 74.4 Hz CTCSS for 1-2 seconds

International Space Station

- Current amateur activity from two ISS ham stations
 - Russian Zvezda service module
 - 2m FM voice/SSTV on 145.800 MHz using TM-D710G
 - FM cross-band repeater (2m uplink/70cm downlink or 70cm uplink/2m downlink), rarely used since late 2000s
 - European Columbus module
 - 2m packet on 145.825 MHz, using GE/Ericsson VHF HT
 - Backup radios for voice & packet operations
- Most ISS voice activity connected with scheduled contacts, but occasional random QSOs with hams
- New TM-D710G for Columbus module, later this year...
- Call signs used from ISS: NA1SS, RS0ISS, OR4ISS
 - Packet/APRS: use **ARISS** in packet path (UNPROTO)



International Space Station

- Random voice contacts
 - Last heard on Saturday mornings in October/November 2018
- Split-frequency operations, can use a memory channel
 - Receive on 145.800 MHz FM, transmit on 144.490 MHz FM
 - 145.800 MHz memory channel with -1.31 MHz offset
- Rapid-fire QSOs, as ISS is visible for up to 10 minutes
- NA1SS QSL manager is Bruce W6WW in California
- **<http://www.ariss.org/>**

When are satellites available?


- Use AMSAT website or tracking programs to know when satellites are in view of your location
- Some programs can control antenna rotators and transceivers
- AMSAT has tracking programs for sale (i.e., **SatPC32**)
- Free programs can be downloaded
 - Windows, Mac OS X, Linux, other operating systems
 - Mobile phones
 - Tablets – iOS, Android, and even small & inexpensive Windows tablets

When are satellites available?

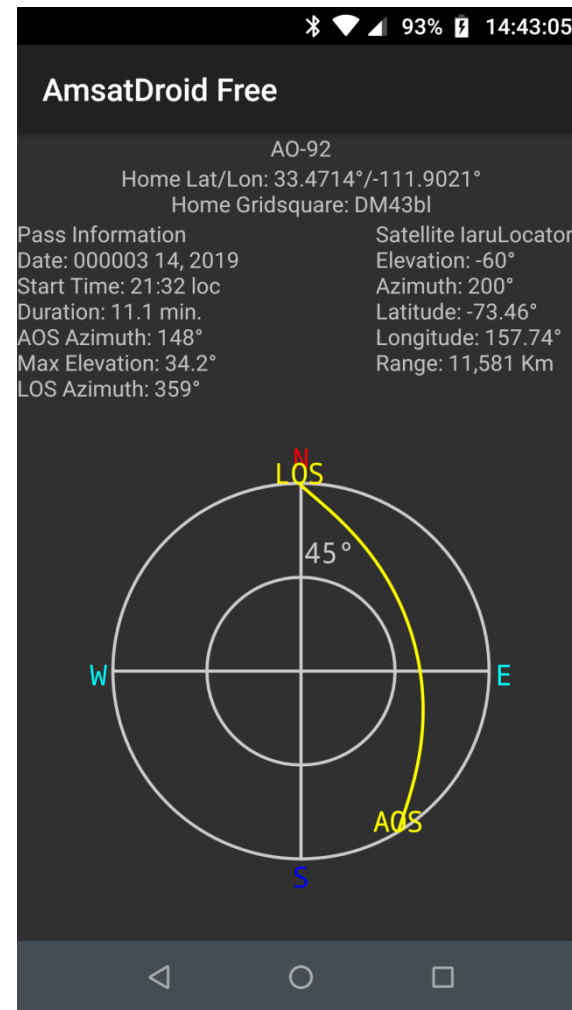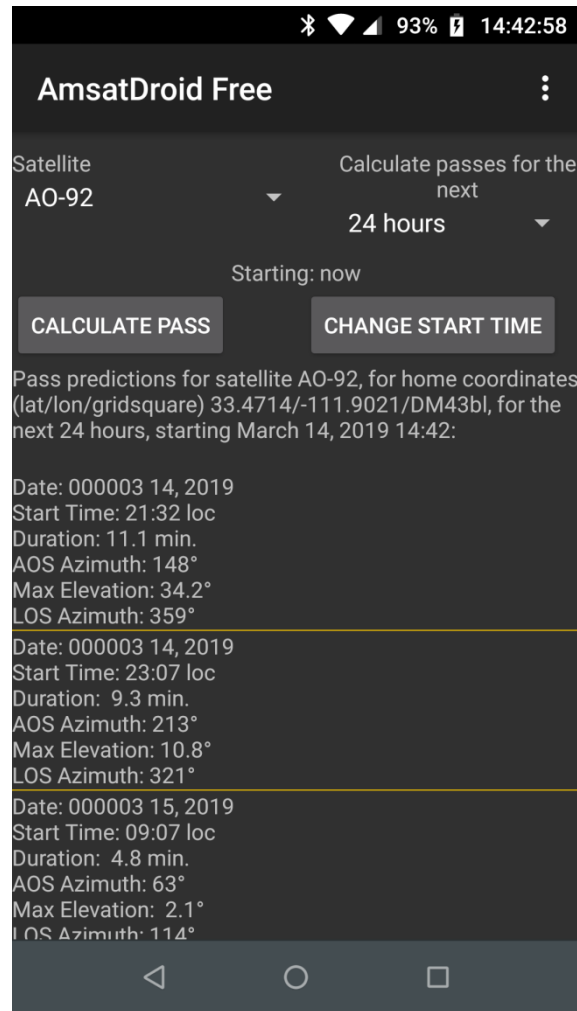


AmsatDroid Free (free Android app)

When are satellites available?

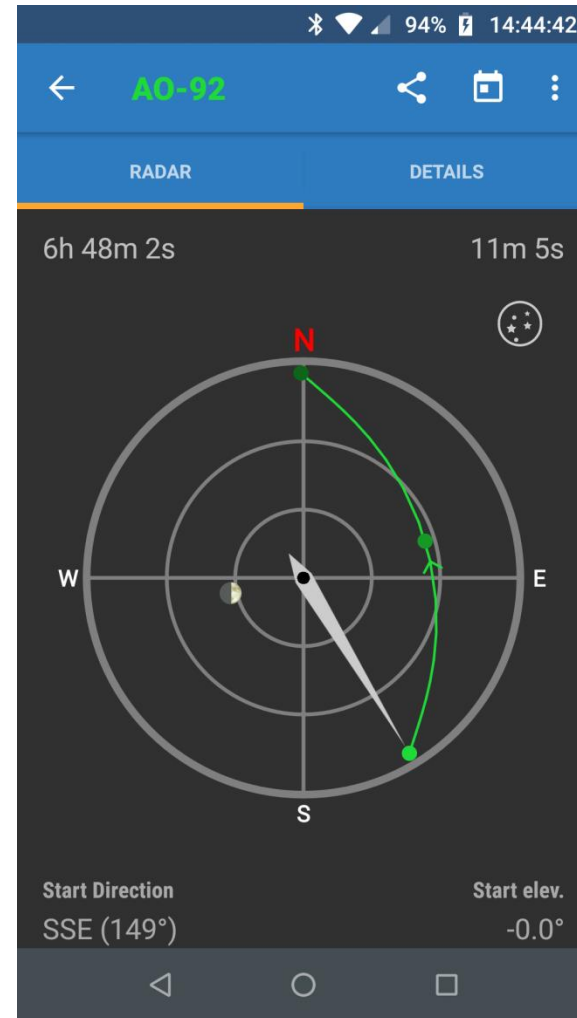

ISS Detector **Pro** (Android & iOS app, \$\$\$)

When are satellites available?



AMSAT™

AMSAT Online Satellite Pass Predictions

10605 Concord St, #304
Kensington, MD 20895
1-888-322-6728

AMSAT Online Satellite Pass Predictions - AO-92

[View the current location of AO-92](#)

| Date (UTC) | AOS (UTC) | Duration | AOS Azimuth | Maximum Elevation | Max El Azimuth | LOS Azimuth | LOS (UTC) |
|------------|-----------|----------|-------------|-------------------|----------------|-------------|-----------|
| 15 Mar 19 | 04:32:46 | 00:11:02 | 149 | 33 | 91 | 359 | 04:43:48 |
| 15 Mar 19 | 06:07:26 | 00:09:13 | 213 | 11 | 276 | 321 | 06:16:39 |
| 15 Mar 19 | 16:07:41 | 00:05:09 | 63 | 2 | 76 | 117 | 16:12:50 |
| 15 Mar 19 | 17:38:32 | 00:11:26 | 12 | 85 | 113 | 191 | 17:49:58 |
| 15 Mar 19 | 19:14:02 | 00:06:27 | 330 | 4 | 303 | 260 | 19:20:29 |
| 16 Mar 19 | 04:12:27 | 00:10:10 | 135 | 19 | 71 | 8 | 04:22:37 |
| 16 Mar 19 | 05:45:48 | 00:10:33 | 197 | 21 | 261 | 331 | 05:56:21 |
| 16 Mar 19 | 17:17:47 | 00:11:12 | 20 | 38 | 119 | 178 | 17:28:59 |
| 16 Mar 19 | 18:52:15 | 00:08:44 | 343 | 9 | 300 | 242 | 19:00:59 |
| 17 Mar 19 | 03:52:28 | 00:09:01 | 119 | 10 | 76 | 16 | 04:01:29 |

Your results are shown above
Use the form below to request more pass predictions

Show Predictions for: for Next Passes

| | | |
|---|---------------------------------------|---|
| Calculate Latitude and Longitude from Gridsquare: | <input type="text" value="DM43bl"/> | <input type="button" value="Calculate Position"/> |
| <i>Or</i> | | |
| Enter Decimal Latitude:* | <input type="text" value="33.4714"/> | <input type="text" value="North"/> |
| Enter Decimal Longitude:* | <input type="text" value="111.9021"/> | <input type="text" value="West"/> |
| Elevation in meters AMSL: | <input type="text" value="367"/> | |
| <input type="button" value="Predict"/> | | |

Tracking utility on www.amsat.org web site
(enter your grid locator or latitude/longitude to set QTH)

Before you transmit...

- Do you hear the satellite?
 - Open squelch all the way
 - Satellites usually have activity on any daytime or evening pass over North America
 - Move antenna around, if satellite is not audible or is weak
 - If you do not hear the satellite, **DO NOT TRANSMIT!**
 - **One exception**: Transmitting on 145.850 MHz FM with 74.4 Hz CTCSS tone to activate SO-50 for 10 minutes, when satellite should be in view
 - **Another exception**: Transmitting to AO-91 or AO-92 with 67.0 Hz CTCSS tone. These downlinks shut off 60 seconds after satellites stops hearing the 67.0 Hz CTCSS tone

Making contacts

- Listen to the satellite, pick out some call signs
- On FM satellites, just transmit your call sign and possibly your grid locator. **DO NOT CALL CQ!**
- Be ready to call other stations, showing that you are hearing the satellite downlink
- Contacts on FM satellites are usually quick – call sign, grid locator, maybe your name & city/state (similar to HF contests & DXpeditions)
- Regular operators can recognize new operators, and are happy to make contacts and help with operating advice
- When holding an antenna, follow satellite & move it for best signal
- Work **full-duplex** (hearing the satellite's downlink while you transmit) whenever possible
- Be ready to make frequency adjustments during a pass
 - For SO-50, adjust downlink frequency downward
 - For AO-91/AO-92, adjust uplink frequency upward

Logging contacts

- Many satellite operators use audio recorders or software on computers/mobile phones/tablets to record audio for logging
 - Especially for portable operating; almost impossible to log in real time if holding a radio/microphone and antenna
 - Play back recordings later to make log entries
 - Keep copies of memorable contacts
 - Be able to give others copies of contacts (MP3 or WAV files)
 - Digital recorders are small, inexpensive; many mobile phones and tablets have voice recorder apps – or use a computer
 - TH-D74A & Icom ID-51A have audio recorder function, with a microSD card
 - Many are looking for confirmations for contacts using QSL cards, Logbook of the World, eQSL, etc. to earn awards

More satellites are coming...

- AMSAT Fox-1 satellites
 - 2m uplink/70cm downlink, SSB/CW
 - Fox-1E (RadFxSat-2), to be launched by Virgin Orbit on a rocket from a 747 near Mojave CA, in 2020
- AMSAT GOLF project
 - Greater Orbits, Larger Footprints
 - announced during 2017 AMSAT Symposium
 - Two 3U CubeSats in the works for future NASA launches with 5 GHz uplink/10 GHz downlink transponders
 - GOLF-TEE
 - GOLF-1
- More from China...

AMSAT


- Organization dedicated to supporting and promoting amateur satellite activity
- Founded in 1969, continuing pioneer work by Project OSCAR
- **All-volunteer organization**, except for office manager
- Operates AO-7, AO-91, and AO-92; Fox-1E coming in 2020
- Supports Amateur Radio on International Space Station (ARISS)
- GOLF (Greater Orbit, Larger Footprint) project for more options beyond small CubeSats at LEO
- Always open to new proposals for amateur satellites
- <http://www.amsat.org/>



Questions?

Additional Slides


The beginning of the Space Age: Sputnik-1 (Спутник-1)

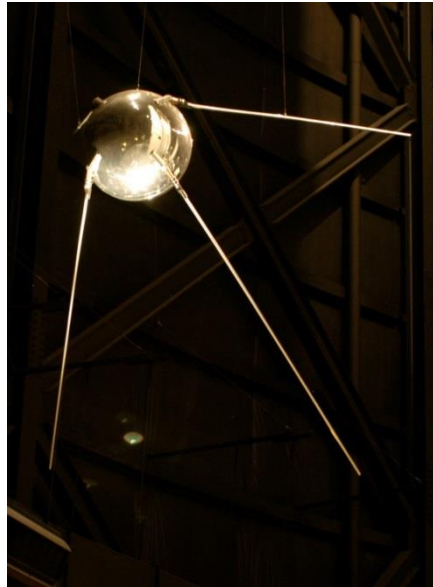

Launched by USSR on 4 October 1957, reentry on 4 January 1958, orbiting at 223 x 950km (139 x 590 miles), 1440 orbits before reentry.

First recordings outside USSR made by RCA engineers in New Jersey and Columbia University radio club (W2AEE), copying beacons on 20.005 & 40.002 MHz

The beginning of the Space Age: Explorer 1

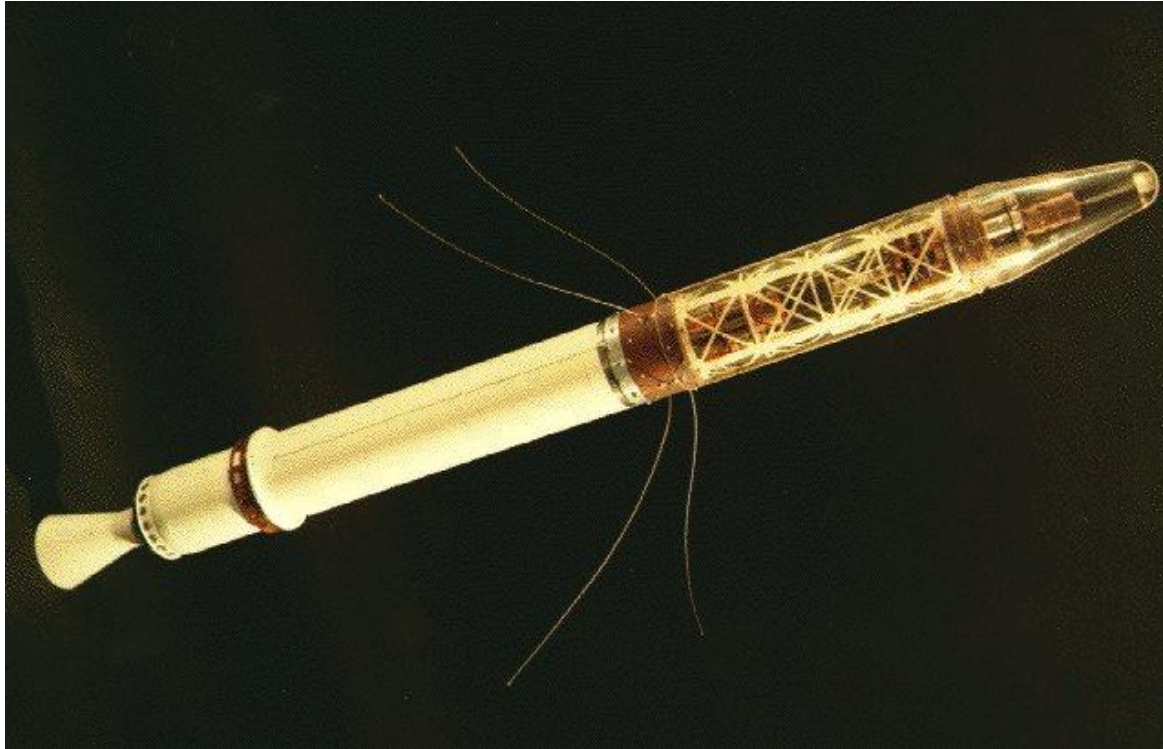

Launched by USA on 31 January 1958, reentry in 1970,
orbiting at 358 x 2550km (222 x 1580 miles)

The beginning of the Space Age: OSCAR I

- Launched on Thor-Agena with Discoverer XXXVI on 12 December 1961, from Vandenberg AFB in California
- First non-government satellite
- First launch of > 1 satellite on 1 launcher
- Transmitted until 3 January 1962, heard by over 570 radio amateurs worldwide
- Transmitted CW beacon – “HI” – on 2m
- Reentry on 31 January 1962
- Decades later, confirmation that Discoverer XXXVI was a spy satellite



Equipment for SSB/CW satellites

- Satellite-ready transceivers
- Pair of monoband all-mode transceivers
- Pair of multiband all-mode transceivers
- One all-mode transceiver, with one wide-band all-mode receiver
 - TH-F6A & TH-D74A HTs include all-mode receiver up to 470 MHz
 - All-mode receivers also includes SDR devices
 - FUNcube Dongle Pro+ - <http://www.funcubedongle.com/>
 - SDRplay receivers (all models) – <http://www.sdrplay.com/> or at HRO stores
- One multiband all-mode transceiver, with computer control
 - Laptops, even some tablets, capable of running satellite-tracking software that controls the transceiver(s)

SSB/CW satellites

- AO-7, launched in 1974, resumed operation in 2002
 - Two possible modes of operation
 - 50 kHz transponder, 70cm uplink/2m downlink (Mode “B”)
 - 100 kHz transponder, 2m uplink/10m downlink (Mode “A”)
 - Powered only by solar panels, after battery failure in 1981
 - Largest footprint of current amateur satellites, supporting QSOs spanning over 8000km (almost 5000 miles)
- FO-29, launched in 1996
 - Built in Japan for JARL, following up on FO-12 & FO-20
 - Originally had other functions including “digitalker”, now operates as 100 kHz transponder with 2m uplink & 70cm downlink
 - Currently operating on very limited schedule

More SSB/CW satellites (FUNcube)

- AO-73 (FUNcube-1), launched in 2013
 - 1U CubeSat
 - 20 kHz transponder, 70cm uplink/2m downlink & telemetry
- EO-79 (FUNcube-3), launched in June 2014
 - 2U CubeSat
 - 20 kHz transponder, 70cm uplink/2m downlink & telemetry
- EO-88 (Nayif-1), launched in February 2017
 - 1U CubeSat
 - 30 kHz transponder, 70cm uplink/2m downlink & telemetry

Still more SSB/CW satellites (China)

- XW-2 satellites, launched in September 2015
 - **Six** satellites launched
 - XW-2E failed a couple of months after launch
 - Three remain operational (XW-2A, XW-2B, XW-2F)
 - 20 kHz transponders, 70cm uplinks/2m downlinks
 - CW and digital telemetry on 2m downlinks
- CAS-4A and CAS-4B, launched in June 2017
 - 20 kHz transponders, 70cm uplinks/2m downlinks

Digital/packet satellites

- International Space Station
 - 2m packet/APRS digipeater (145.825 MHz simplex) – use ARISS for packet path (UNPROTO)
 - 1200bps AX.25 packet
- NO-84 (PSAT)
 - 10m uplink/70cm downlink PSK31/FM transponder – uplink on 28.120 MHz PSK31, downlink on 435.350 MHz FM (+/- 10 kHz for Doppler)
 - 2m 1200bps AX.25 packet digipeater (145.825 MHz, simplex) – use ARISS or APRSAT for packet path when digipeater is active
- FalconSAT-3
 - 2m uplink/70cm downlink packet/APRS digipeater and BBS
 - 9600bps AX.25 packet
 - Use **PFS3-1** for packet path (UNPROTO) to use digipeater

NO-84 (PSAT)

- Built by US Naval Academy, launched in May 2015
- 10m/70cm PSK31/FM transponder
 - Primary amateur payload, operational all the time
 - 28.120 MHz PSK31 uplink, 435.350 MHz (+/- 10 kHz) FM downlink
- 1200bps AX.25 packet digipeater on 145.825 MHz
 - Activated periodically by command stations
 - Packet path (UNPROTO) is **ARISS** or **APRSAT**
 - Telemetry beacons

FalconSAT-3

- Built for US Air Force Academy, launched in 2007
- Retired from military service in 2017, now operated by AMSAT with non-amateur payloads disabled by USAF
- 9600bps AX.25 packet mailbox/BBS and digipeater
 - 145.840 MHz uplink, 435.103 MHz (+/- 10 kHz) downlink
 - BBS requires software like PB/PG or WiSP to access
 - Digipeater uses **PFS3-1** as packet path/UNPROTO

Antennas


Tim Lilley N3TL, about to work an FM satellite with an HT and an Elk Antennas 2m/70cm log periodic antenna



Equipment for digital/packet satellites

- VHF/UHF FM transceivers with built-in TNCs
 - Kenwood: TH-D7, TH-D72, TH-D74, TM-D700, TM-D710, TM-D710G
 - Yaesu: FT-1DR, FT-2DR, FTM-400XDR (**NOT** FTM-100DR)
 - PicoAPRS
- VHF/UHF FM transceivers with software
 - AGW Packet Engine, UZ7HO SoundModem for 1200bps packet
 - UZ7HO HS-SoundModem for higher speeds (i.e., 9600bps)
- VHF/UHF FM transceivers with external TNCs
 - Kantronics KPC-3+ or KPC-9612+, Mobilinkd, TNC-X, lots of old TNCs
- UISS is a popular program for working these satellites

The beginning of the Space Age: OSCAR I

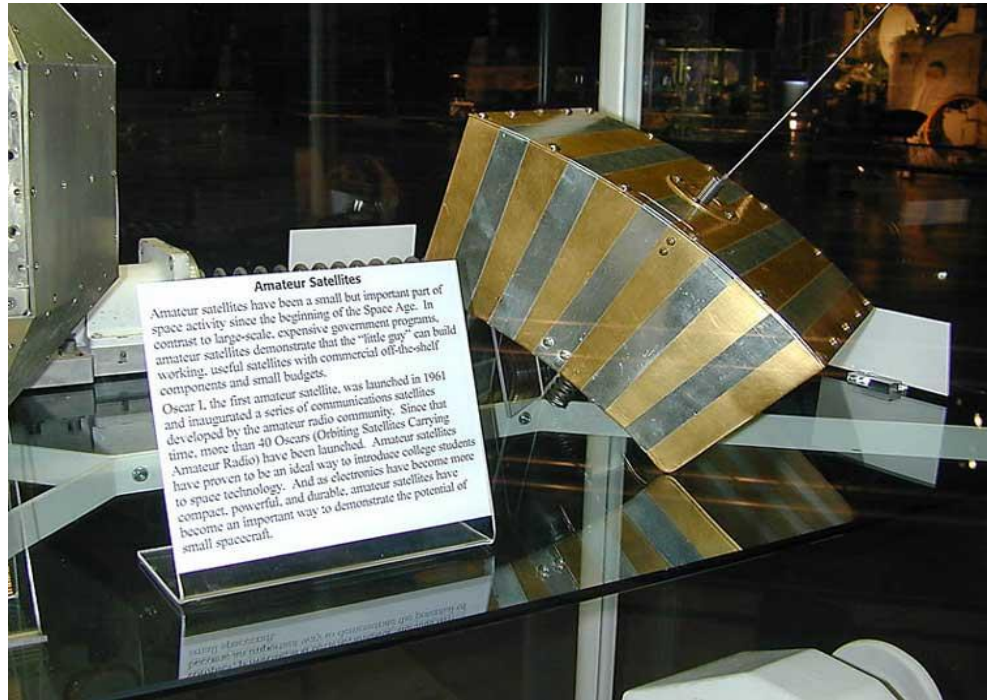

Model donated by Project OSCAR to Smithsonian, on display at Udvar-Hazy Center (National Air and Space Museum annex, at Dulles Airport). ARRL also has an OSCAR I model, which transmits!

International Space Station



NASA astronaut Reid Wiseman, operating from European Columbus module as NA1SS, on 28 June 2014 (Field Day)


International Space Station



Slow-scan television (SSTV) picture, received on 145.800 MHz by WD9EWK, 2 February 2015

AO-7 (OSCAR 7)

- Constructed by AMSAT, launched 15 November 1974 from Vandenberg AFB
- Went silent in 1981, but resumed operating in 2002
- Still operational today, 40+ years after launch

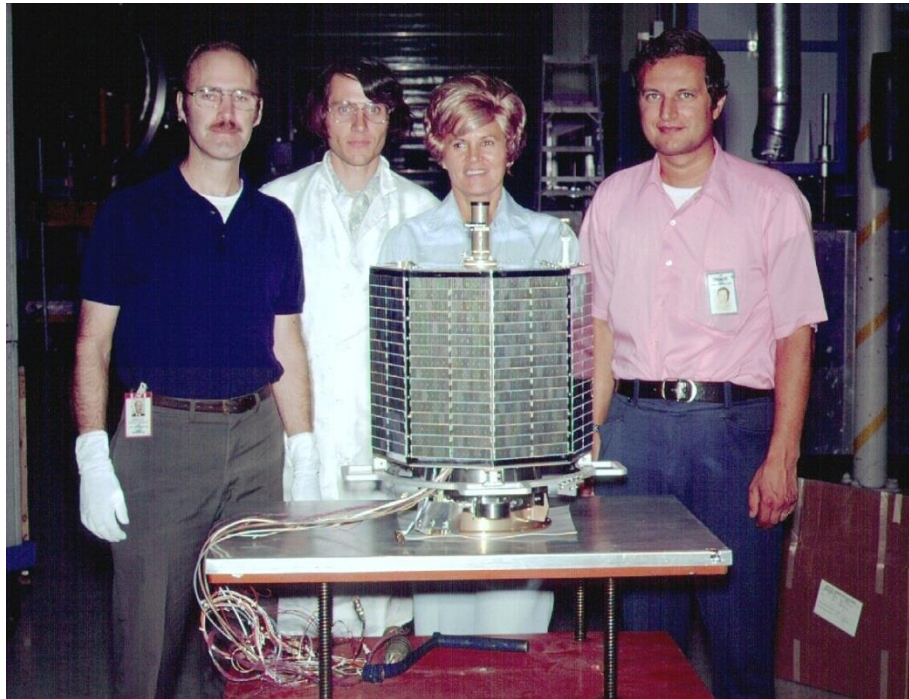


AO-7 (OSCAR 7)

- Radio amateurs demonstrated satellite-to-satellite communications in 1975, with OSCARs 6 and 7
- EKG transmitted via OSCAR 7 from California to Washington DC
- Tests validating methods of locating transmitters using OSCAR 7 (without GPS-type system) leads to COSPAS-SARSAT satellite system & UHF locator beacons still in use today
- Radio amateurs continue to use this satellite daily



AO-73 (FUNcube-1)

Launched in November 2013, 70cm/2m SSB/CW transponder with 2m telemetry beacon, 4"/10cm cube

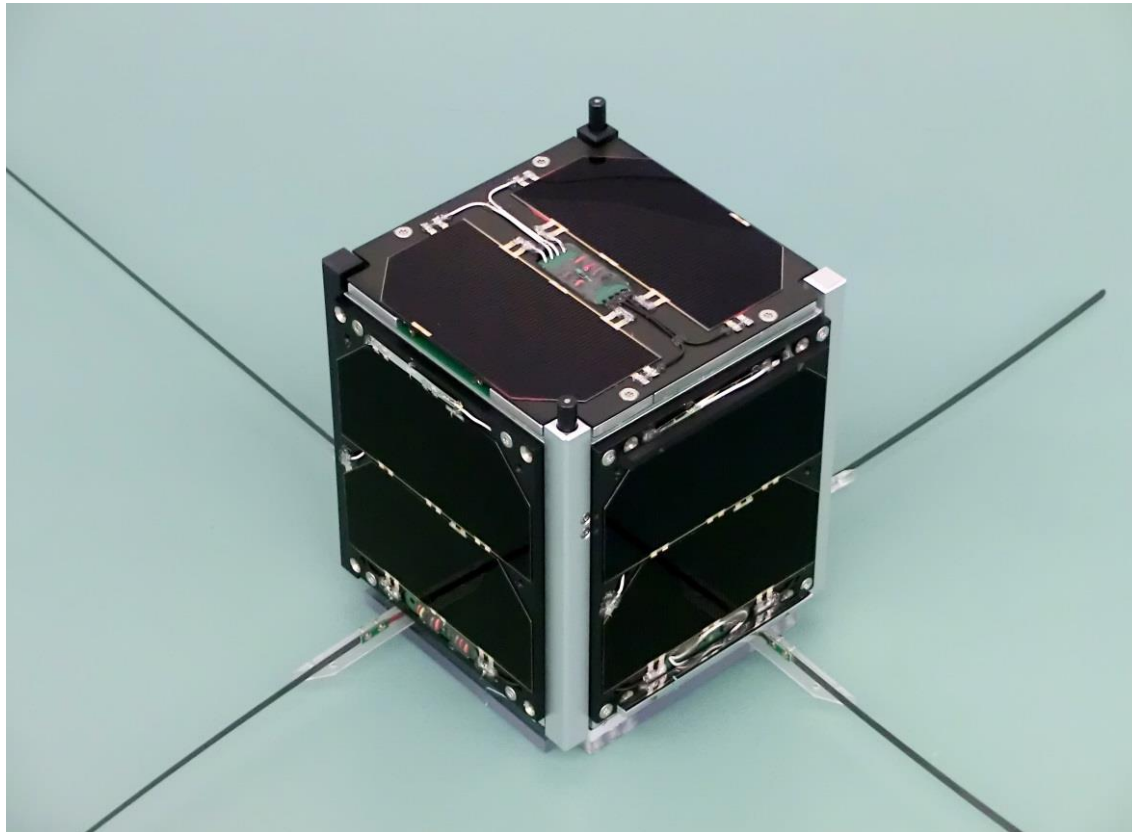


FUNcube Dashboard software

Available from <http://funcube.org.uk/>, Windows software can directly control a FUNcube Dongle Pro+ SDR receiver



AO-85 (Fox-1A)

Launched in October 2015, 70cm/2m FM transponder with telemetry, in a 4"/10cm cube

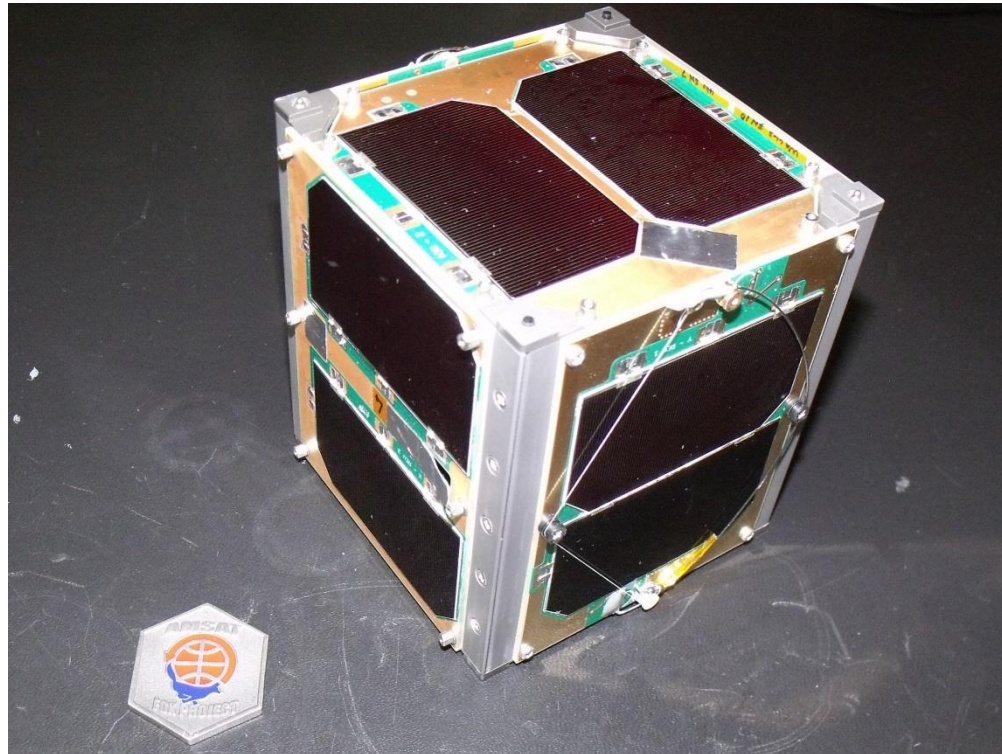

AO-92 (Fox-1D)

Launched in January 2018, FM transponder (70cm or 23cm uplink/2m downlink) with telemetry and camera

Pictures taken by AO-92 on 13 & 16 January 2018 over USA east coast



FoxTelem software

Free software available from AMSAT web site for Windows, Mac OS X, and Linux (requires Java)

Fox 1 Telemetry Analysis Tool
File Decoder Spacecraft Help

Input **Fox-1A** WU Rad (1A) Measurements

Satellite **Fox-1A(FM) Mode:** Telemetry Payloads Decoded: **5**

Last Realtime: **Resets: 1 Uptime: 920321** Max: Resets: Uptime: Min: Resets: Uptime:

Radio

| | RT | MIN | MAX |
|--------------------|----------|------|------|
| RX Temperature (C) | 20.7 | 0000 | 0000 |
| RSSI (dBm) | -104.3 | 0000 | 0000 |
| TX Antenna | Deployed | | |
| RX Antenna | Deployed | | |

Computer

| | RT | MIN | MAX |
|-----------------------|-------------------|------|------|
| Temperature (C) | 42.7 | 0000 | 0000 |
| Spacecraft Spin (rpm) | 0.9 | 0000 | 0000 |
| Battery I2C | FAIL | | |
| PSU1 I2C | OK | | |
| PSU2 I2C | OK | | |
| Ground Resets | 0 | | |
| Diagnostic Info | I2C2: W 6 B 0 R 5 | | |
| Hard Error | 0000 | | |
| Soft Error | 0000 | | |

Battery

| | RT | MIN | MAX |
|--------------------|------|------|------|
| Cell A + B + C (V) | 4.08 | 0000 | 0000 |

PSU

| | RT | MIN | MAX |
|----------------|------|------|------|
| Current (mA) | 6.1 | 0000 | 0000 |
| Board Temp (C) | 19.6 | 0000 | 0000 |

Experiments

| | RT | MIN | MAX |
|----------------------|----|-----|-----|
| Vanderbilt Radiation | OK | | |

+X Panel

| | RT | MIN | MAX |
|----------------|------|------|------|
| Temp (C) | -5.2 | 0000 | 0000 |
| Voltage (V) | 0.0 | 0000 | 0000 |
| Rotation (dps) | 1.3 | 0000 | 0000 |

+Y Panel

| | RT | MIN | MAX |
|----------------|------|------|------|
| Temp (C) | -2.8 | 0000 | 0000 |
| Voltage (V) | 0.0 | 0000 | 0000 |
| Rotation (dps) | 0.9 | 0000 | 0000 |

+Z Panel

| | RT | MIN | MAX |
|----------------|------|------|------|
| Temp (C) | -1.7 | 0000 | 0000 |
| Voltage (V) | 0.0 | 0000 | 0000 |
| Rotation (dps) | -4.9 | 0000 | 0000 |

-X Panel

| | RT | MIN | MAX |
|-------------|------|------|------|
| Temp (C) | -6.3 | 0000 | 0000 |
| Voltage (V) | 0.0 | 0000 | 0000 |

-Y Panel

| | RT | MIN | MAX |
|-------------|------|------|------|
| Temp (C) | -5.6 | 0000 | 0000 |
| Voltage (V) | 0.0 | 0000 | 0000 |

-Z Panel

| | RT | MIN | MAX |
|-------------|------|------|------|
| Temp (C) | -6.4 | 0000 | 0000 |
| Voltage (V) | 0.0 | 0000 | 0000 |

Display Raw Values Display UTC Time

Version 1.02b - 13 November 2015 Logs: C:\foxtelem

Captured: 2015/11/15 22:07:01

Audio missed: 0.0% / 0 Decoded: 12 Queued: 0

FoxTelem software

Telemetry includes data from university experiments, pictures from cameras on some Fox-1 satellites.

The screenshot shows the Fox 1 Telemetry Analysis Tool interface. At the top, there's a menu bar with 'File', 'Decoder', 'Spacecraft', and 'Help'. Below that, a toolbar contains 'Input', 'Fox-1A', 'VU Rad (1A)', and 'Measurements'. The main window title is 'Fox-1A Vanderbilt University Radiation Experiments' and 'Radiation Payloads Decoded: 9'.

There are several status panels:

- VU Controller:** Status: ACTIVE, Restarts: 200, Uptime (s): 130928.
- Low Energy Proton Experiment:** LEP Restarts: 161, LEP Uptime (16-sec): 131184, Memory Livetime (Mb-sec): 5702184, Memory Errors: 52.
- Vulcan Experiment 1:** State: ACTIVE, Power (mW): 39.
- Vulcan Experiment 2:** State: DISABLED, Power (mW): 3.
- Vulcan Experiment 3:** State: DISABLED, Power (mW): 0.
- Vulcan Experiment 4:** State: DISABLED, Power (mW): 0.

At the bottom, there's a table with columns: RESET, UPTIME, TYPE, SEQUENCE, and DATA. The table contains 12 rows of telemetry data.

At the very bottom, there are controls for 'Display Raw Values', 'Packets (Buffered Mode)', and 'Telemetry' (selected). It also shows 'Displaying last 100 payloads decoded' and version information 'Version 1.02b - 13 November 2015'.

| RESET | UPTIME | TYPE | SEQUENCE | DATA |
|-------|--------|-----------|----------|--|
| 1 | 920375 | TELEMETRY | 0 | ACTIVE 200 130928 ACTIVE DISABLED DISABLED DISABLED 39 3 0 0 161 131184 5702184 52 |
| 1 | 920360 | TELEMETRY | 0 | ACTIVE 200 130928 ACTIVE DISABLED DISABLED DISABLED 46 3 0 0 161 131168 5702184 52 |
| 1 | 920346 | TELEMETRY | 0 | ACTIVE 200 130912 ACTIVE DISABLED DISABLED DISABLED 42 3 0 0 161 131168 5702184 52 |
| 1 | 920331 | TELEMETRY | 0 | ACTIVE 200 130880 ACTIVE DISABLED DISABLED DISABLED 39 3 0 0 161 131136 5702184 52 |
| 1 | 920297 | TELEMETRY | 0 | ACTIVE 200 130864 ACTIVE DISABLED DISABLED DISABLED 39 3 0 0 161 131120 5702184 52 |
| 1 | 920287 | TELEMETRY | 0 | ACTIVE 200 130848 ACTIVE DISABLED DISABLED DISABLED 39 3 0 0 161 131104 5702184 52 |
| 1 | 920243 | TELEMETRY | 0 | ACTIVE 200 130800 ACTIVE DISABLED DISABLED DISABLED 82 3 0 0 161 131056 5702184 52 |
| 1 | 920239 | TELEMETRY | 0 | ACTIVE 200 130800 ACTIVE DISABLED DISABLED DISABLED 39 3 0 0 161 131056 5700984 52 |
| 1 | 920229 | TELEMETRY | 0 | ACTIVE 200 130784 ACTIVE DISABLED DISABLED DISABLED 39 3 0 0 161 131040 5700984 52 |

FoxTelem software

Can also decode pictures from cameras on AO-92 & Fox-1C

The screenshot displays the 'Fox 1 Telemetry Analysis Tool' window. The interface includes a menu bar with 'File', 'Decoder', 'Spacecraft', and 'Help'. Below the menu is a tabbed interface with 'Input' tabs for 'AO-85', 'Fox-1Cliff', 'Fox-1D', 'Fox-1E', and 'RadFxSat'. The 'Fox-1D' tab is active, showing 'Health' sub-tabs for 'HERCI (1D)', 'HERCI HK (1D)', 'Camera (1D)', and 'Measurements'. The 'Camera (1D)' sub-tab is selected, displaying 'Fox-1D Virginia Tech Camera' and 'Images: 1'. On the left, a data table shows:

| | |
|-------------|---------------------|
| Reset: | 0 |
| Uptime: | 125974 |
| Pic Number: | 5 |
| Captured: | 2018/01/13 23:03:04 |

To the right of this table is a large image area. The top portion of the image shows a blue sky with a white cloud, while the rest is obscured by a large grey rectangular redaction box. At the bottom of the window, there is a status bar with a 'Show Latest Image' checkbox, a 'Displaying last 30 images decoded' field, and 'from Reset 0' and 'from Uptime 0' fields. The footer contains 'Version 1.05y - 5 Nov 2017', 'Logs: D:\FoxTelem\logs', and 'Audio missed: 0.0% / 0 Frames: 4 Payloads: 12 Queued: 0'.

FoxTelem software

Partial picture (L) received from AO-92 by WD9EWK on 13 January 2018 at Thunderbird Hamfest, using SDRplay RSP1A, Elk Antennas handheld 2m/70cm log periodic, & 8-inch Windows 10 tablet at AMSAT table. Complete picture received by other stations on right.



FoxTelem software


Software can directly control a FUNcube Dongle Pro+, or process data from other SDR receivers or 9600bps data port on many radios

The screenshot displays the Fox 1 Telemetry Analysis Tool interface. The window title is "Fox 1 Telemetry Analysis Tool" and the menu bar includes "File", "Decoder", "Spacecraft", and "Help". The interface is divided into several sections:

- Input:** Includes tabs for "Fox-1A", "VU Rad (1A)", and "Measurements". Below these, there are radio buttons for "Low Speed" (selected) and "High Speed". A "Stop" button is present. The source is set to "Line 1 (Virtual Audio Cable)" with a sample rate of "48000". There are also radio buttons for "AF" (selected) and "IQ".
- Output:** Features a "Monitor Audio" button and a dropdown menu.
- Data Under Voice (DUV) Filter:** Offers filter options: "Raised Cosine" (selected), "Windowed Sinc", and "Cutoff frequency (Hz)" with a slider ranging from 0 to 400. Below it, "Filter Length (samples)" has a slider ranging from 64 to 512.
- Audio Options:** Includes checkboxes for "View Filtered Audio" (checked), "Monitor Filtered Audio", and "Squelch when no telemetry".
- Main Display:** A large waveform plot showing a signal. Above the plot, it reads "Sample rate: 48000 | Samples: 70".
- Eye Diagram:** A smaller plot on the right showing an eye diagram with a red vertical line indicating "SNR:6.4". Below it, it shows "Errors 10" and "Erasures 3".

At the bottom of the window, the status bar displays "Version 1.02b - 13 November 2015", "Logs: C:\foxtelem", "Audio missed: 0.0% / 0", "Decoded: 9", and "Queued: 0".

Options for satellite DX from Arizona

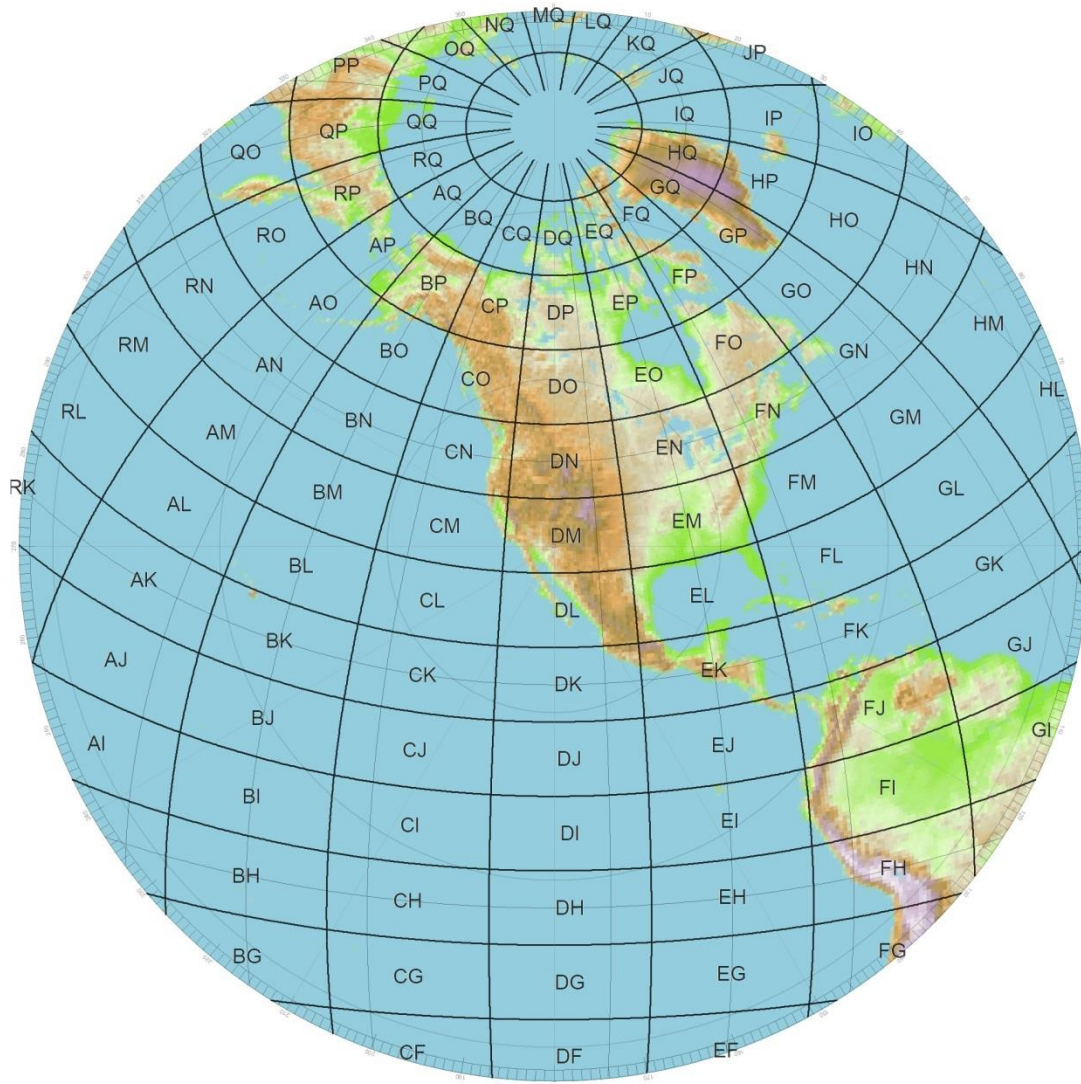

(8000km radius from Phoenix area, equivalent to AO-7 footprint)

Options for satellite DX from Arizona

- 50 DXCC entities in North America
- Several entities in northern South America, plus HC8
- Some European entities
 - CU, OY, TF in north Atlantic
 - Parts of EI, G, GI, GM
- KH6 for Oceania
- UA0 for Asia (UA0ZGX is active via AO-7)
- Africa – even EA8 – is just out of reach at this time
- “Location, location, location...” – can add to DXCC stats from anywhere in a DXCC entity...