


Glass Vacuum Lifters

Pannekoke

Kombi 7211-DS2 Glass Lifter

An excellent all rounder, this 600kg capacity dual circuit Kombi 7211-DS2 offers lockable tilting at 15° intervals.

Extension arms and supplementary pads are supplied as standard, giving a 2.8m pad spread for extra stability when handling large pieces of glass. The DS2 features manual rotation through +/- 90° and individual pad shut-off valves to help accommodate irregular loads.

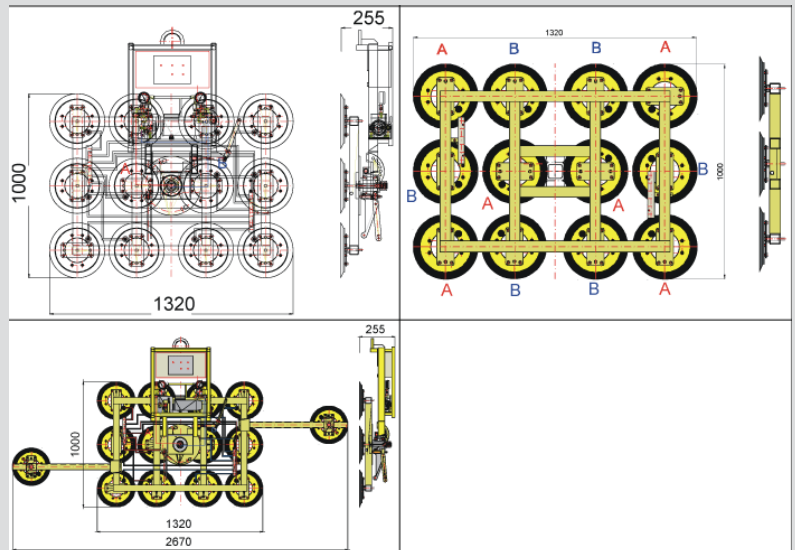

Key Features

- Dual circuit vacuum system with **1** pump and **2** vacuum tanks.
- Suitable for lifting gastight materials with a smooth surface for example: glass, plastic boards, ceramic plates, sheet metals, coated boards.
- With **300mm** Black rubber suction cups that are not abrasion resistant and heat resistant to **100°C**
- **12** suction cups(**14** with extension arms)
- Loading capacity of frame is **600kg** vertical and horizontal
- The weight of the lifter is **112kg**
- The structural depth of the lifter is **255mm** approx.
- **12** volt DC pump from rechargeable battery.
- Battery Charger **110v/240v 50/60Hz** single phase.
- **2** x extension arms with moveable pads