

ACCESS-KIT-01

For Small office's, clinics, Stores, cash Rooms & Warehouse or Godowns

Access Control Kit



Face+Key Pad+ card Access Control Entry terminal

- 4.3 inch LCD touch screen; resolution 480×272 With 2 MP wide-angle dual lens, white fill light, IR light
- Support face, card and password unlock; unlock by period
- User data can be stored at the access controller; can hold 1500 face images and work without network
- Face-camera distance: 0.3m-1.5m

TECHNICAL SPECIFICATION:

System

Main Processor: Embedded Processor
 Network Protocol: IPv4, RTSP, RTP, TCP, UDP, P2P
 OSDP Protocol: Support
 Interoperability: CGI
 SDK: Support

Basic

Display: 4.3 inch TFT screen
 Screen Type: Capacitive touch screen
 Screen Resolution: 480 × 272
 Camera: 2MP CMOS
 Light Compensation: Auto whitelight fill light Auto IR fill light
 Voice Prompt: Support
 Housing Material: PC+ABS

Function:

Unlock Mode: Card/Password/Face unlock
 Card, password, and face combination unlock
 Card Reader Type: IC card
 Period List: 128
 Holiday Period: 128
 First-card Unlock: Support
 Remote Verification: Support

Alarm

Anti-passback: Support
 Tamper: Support
 Duress: Support
 Door Sensor Timeout: Support
 Illegal Intrusion: Support
 Illegal Card Exceeding Threshold Alarm: Support

General

Power Supply: DC 12V 1.5A
 Power Consumption: ≤18W
 Dimensions: 116 mm × 107 mm × 22 mm
 Operating Temperature: -10°C to +55°C (+14°F to +131°F)
 Operating Humidity: 5%RH-95%RH (non-condensing)
 Working Environment: Indoor
 Installation: Desktop and Wall mount
 Certifications: CE/FCC


Peripheral Card Reader: 1 RS-485
 Multi-card Unlock: Support
 Real-time Surveillance: Support
 Web Configuration: Support
 Face-camera Distance: 0.3 m-1.5 m
 Face Verification Accuracy: 99.5%
 Face Recognition Speed: 0.3s

Capacity

User Amount: 1500
 Face Amount: 1500
 Card Amount: 1500
 Password Amount: 1500
 Storage Record Amount: 150,000

Port

RS-485: 1
 USB: 1 USB2.0 port
 Network: 1 10/100Mbps Ethernet port
 Alarm Input: 1
 Alarm Linkage: Support
 Unlock Button: 1
 Door Status Detection: 1
 Door Lock Control: 1

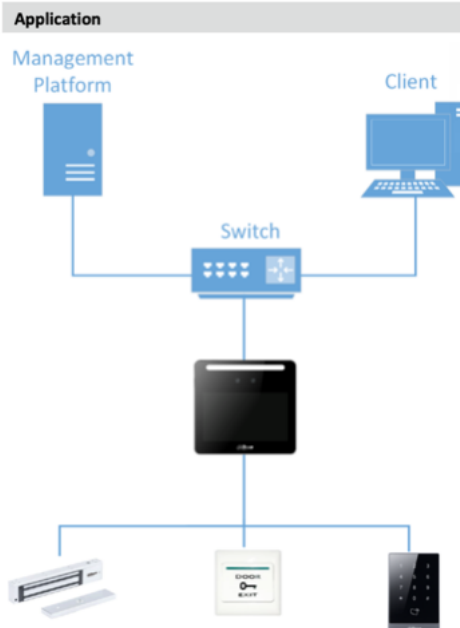



Card Reader for Exit terminal

Water-proof RFID Reader

- Wiegand34(26 optional) bits RS-485 protocol
- 13.56MHz (Mifare)
- 125KHz(EM-ID)
- Water-proof design
- Red, blue and green indicator LEDs
- Surface mounted installation

TECHNICAL SPECIFICATION:

System

Main Processor: 8 Bit

Read

Read Format: 125KHz
Read Range: 3-6cm (max.)
Reading time: <0.1s

Function

Water-proof: IP67

Interface

To Controller: RS485,Wiegand 34(26 optional)

General:

Beep Tone: Buzzer
Ingress protection: IP67, water resistant
Power Supply: 9-15VDC/100mA
Operating Temperature: -30°C to +60°C
Working Humidity: ≤95%
Dimension(WxDxH): 96mm×43mm×17mm
Weight: 0.1kg
Working Environment: Outdoor

Certificates

CE: Yes
FCC: Yes



Operating frequency of 125 kHz, read range of 3 - 5 cms

Access Control Kit Includes			
Sl	Product	Description	Quantity
1	Access Control Entry Terminal	Face+PIN+Proximity Card Reader Standalone Controller	1
2	Access Control Exit Terminal	Proximity Card Reader	1
3	Access Cards	Proximity Cards 125Khz	30

Accessories - Not Included in this Kit can be Purchased on our eStore

1	Electromagnetic Locks for Wooden Door Single Leaf 9or0 Double Leaf Doors
2	Drop Bolt locks for Glass Door & Sliding Door

Please Note: Product Specification and Model can be Changed without any Prior Notice