

ACCESS-KIT-02

For Small office's, clinics, Stores, cash Rooms & Warehouse or Godowns

Access Control Kit



Face / Palm / Card / Password ENTRY

FACE TERMINAL is a newly released Linux-Based Time Attendance & Access Control Terminal featured with the latest Visible Light Facial and Palm Recognition Technology. The device is incorporated with Computer Vision Technology and Deep Learning Algorithms which intelligently detect faces and enable touch-less palm authentication with novel hand tracking techniques.

Features:


- Enhanced Safety & Hygiene
- Multi-Modal Verification:
Face / Palm / Card / Password
- Dual Card Modules:
125kHz ID card (EM) / 13.56MHz IC card (RFID S50/S70 (13.56) MHz 1K/4K)
- Inbuilt Light Source with Auto-Adjustable Brightness
- Face Capacity: 1000 & Palm Capacity: 800

TECHNICAL SPECIFICATION:


Display: 4" touch screen
 Face Capacity: 1000
 Palm Capacity: 800
 Card Capacity: 1000
 Transactions: 150000
 Operation System: Linux
 Standard Functions ID Card, ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Holidays, Anti-passback, Record Query, Tamper Switch Alarm, Multiple Verification Methods, Palm Recognition, WiFi
 Working Humidity: 10% ~ 90%
 Working Temperature: 0°C ~ 45°C (32°F ~ 113°F)

Hardware: 900MHz Dual Core CPU; 512MB RAM / 512MB Flash;
 2MP Binocular Camera; Adjustable LED Supplement Lighting
 Communication: TCP/IP, USB Host, WiFi, Wiegand Input/Output, RS485
 Access Control Interface: 3rd-party Electric Lock, Door Sensor, Exit Button, Alarm Output, Auxiliary Input
 Optional Function: 13.56MHz IC Card (RFID S50/S70 (13.56Mhz) 1K/4K Card)
 Facial Recognition Speed: ≤1s
 Biometrics Algorithms: ZKFace V5.8 & ZKPalm V12.0
 Power Supply: 12V 3A



Configuration

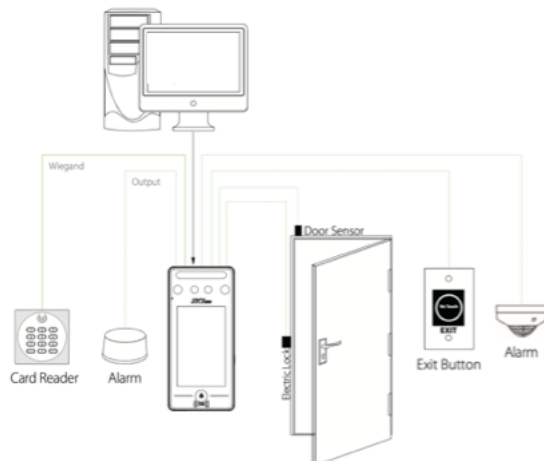

Dimensions (mm)

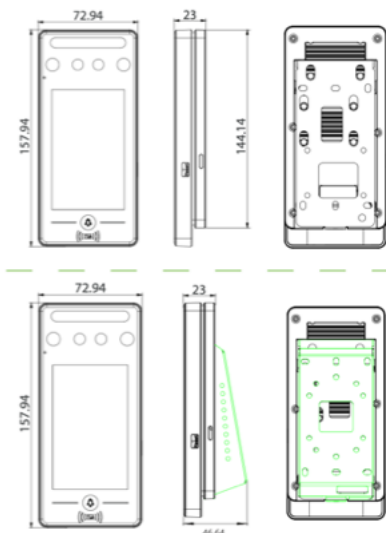

DEN-STR-PLUS-IND

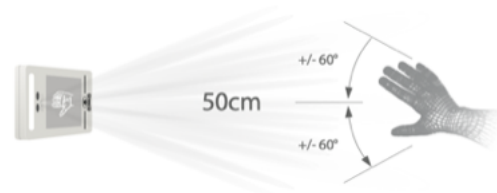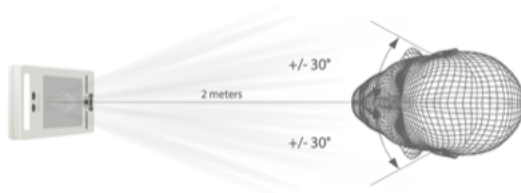

Card Reader for Exit terminal

Wiegand Card Readers
 125kHz EM or 13.56MHz Mifare card reader
 Wiegand interface

TECHNICAL SPECIFICATION:

Read Range: KRxxx-E: Up to 10CM, KRxxx-M: Up to 5CM
 Reading Time: ≤300ms
 Input Port External: LED Control , External Buzzer Control
 Output Port: KRxxx-E: 26bit Wiegand (Default), KRxxx-M: 34bit Wiegand (Default)
 Power/Current: DC 6-14V / Max.70mA
 LED: Red and Green LEDs
 Operating Temperature: -10°C to +65°C
 Material: ABS+PC with texture
 Operating Humidity: 10% to 90% relative humidity non-condensing
 Beeper: Yes



Operating frequency of 125 kHz, read range of 3 - 5 cms

Access Control Kit Includes			
Sl	Product	Description	Quantity
1	Access Control Entry Terminal	Face+PIN+Proximity Card Reader Standalone Controller	1
2	Access Control Exit Terminal	Proximity Card Reader	1
3	Access Cards	Proximity Cards 125Khz	20
Accessories - Not Included in this Kit can be Purchased on our eStore			
1	Electromagnetic Locks for Wooden Door Single Leaf 9or0 Double Leaf Doors		
2	Drop Bolt locks for Glass Door & Sliding Door		

Please Note: Product Specification and Model can be Changed without any Prior Notice