

DEN-VIP-PLUSIND

This Starter package is Specially tailor made for Warehouses & Godowns which hold 15,000+ Square feet area.

Access Control Kit



FACE + FINGER PRINT + CARD ENTRY TERMINAL

Facial multi-biometric time & attendance and access control terminal supports up to 3,000 face templates, 4,000 fingerprint templates and 10,000 cards.

With DENLOL'S latest hardware plat-from and algorithm, it offers brand new UI and user-friendly operation interface to provide smooth user experience.

With advanced face algorithm and multi-biometric verification technology, the terminal's security level of verification is significantly enhanced.


TECHNICAL SPECIFICATION:

- Display: 4.3-Inch Touch Screen
- Face Capacity: 3,000
- Fingerprint Capacity: 4,000
- ID card Capacity: 10,000
- Logs Capacity: 100,000
- Communication: TCP/IP, USB Host, WiFi (optional)
- Standard Functions: Automatic Status Switch, Self-Service Query, Work Code, SMS, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID
- Optional Functions:RFID S50/S70 IC Card (13.56 MHz), 3G, ADMS, 2000 mAh Backup Battery
- Power Supply: 12V 3A
- Operating temperature: 0 °C- 45 °C
- Operating Humidity: 20%-80%


FEATURES:

- 3, 000 face and 4,000 fingerprint templates
- Multi-language
- High verification speed
- Advanced and user-friendly UI
- Optional built-in battery backup, providing approximately 4 hours of continuous operation
- New Framework firmware, easy to extend functions and customise client's requirements
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo, enhancing the security level of verification

Configuration

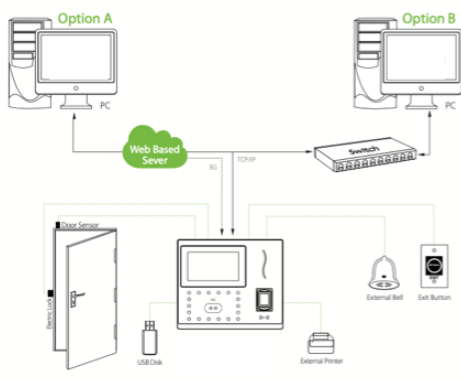

What's in the Box

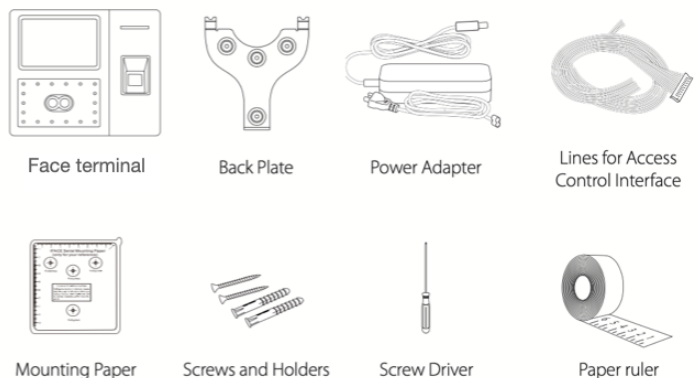



Finger Print Reader for Exit terminal

fingerprint reader with RS485 communication interface works with biometric access controllers and fingerprint standalone access control, including inBIO series controllers, F8 and so on. It offers the function of capturing and transferring fingerprint samples to access control panel. With its IP65 rated rugged structure, Device offers extra durability in all weather conditions including outdoor environments.

TECHNICAL SPECIFICATION:

CPU: 324 MHz
 Fingerprint Sensor: Small Size Sensor
 Algorithm Version: Finger VX10.0
 Communication: RS485
 Standard Function: ID Card Module
 Optional Function: RFID S50/S70 IC Card (13.56Mhz) 1K/4K Module
 Voice Prompt: Buzzer
 Power Supply: DC 12V
 Operating Temperature: 0 ~ 45°C (32°~113°F)
 Protection Grade: IP65
 Dimension(L x W x H): 102 x 50 x 37mm



Operating frequency of 125 kHz, read range of 3 - 5 cms

Access Control Kit Includes

Sl	Product	Description	Quantity
1	Access Control Entry Terminal	Face+Finger Print +Proximity Card Reader Standalone Controller	1
2	Access Control Exit Terminal	Finger Print Reader	1
3	Access Cards	Proximity Cards 125Khz	100

Accessories - Not Included in this Kit can be Purchased on our eStore

1	Electromagnetic Locks for Wooden Door Single Leaf 9or0 Double Leaf Doors
2	Drop Bolt locks for Glass Door & Sliding Door

Please Note: Product Specification and Model can be Changed without any Prior Notice

Intrusion Alarm Kit



Micro-controller based 24 zones control panel, Can expand up to 40 wired zones with expansion modules, Can connect up to 14 wireless sensors and key fobs by adding wireless receiver, Automatic arming and disarming, 1 admin user and 3 defined sub users, Inbuilt 2 Voice Message 20 number GSM dialer with multiple alarm and status SMS, Alarm Information communicated over GSM with alarm type, zone no, time and date Status SMS in case of system arm, disarm, code change, power on, power off & low battery, Android app to operate and program panel and receive alarm and status messages from panel, Sturdy sheet metal enclosure with advance technology tamper detection.

FEATURES:

Micro-controller based 24 zones control panel
 Can expand up to 40 wired zones with expansion modules
 Can connect up to 14 wireless sensors and key fobs by adding wireless receiver
 Automatic arming and disarming, 1 admin user and 3 defined sub users
 Inbuilt 2 Voice Message 20 number GSM dialer with multiple alarm and status SMS.

QUAD P.I.R. MOTION SENSOR



Digital Quad Technology PIR Motion Sensor with Intelligent Pet Immunity. Detection Range 12m, Multi Angle wall bracket. ABS Housing.

TECHNICAL SPECIFICATION:

Detection method Passive infrared
 Coverage 12m x 12m(40ft x 40ft) 85°wide
 Detection zones 78 zones
 Mounting height 1.5 to 2.4m (5 to 8ft)
 LED alarm indicator Switchable ON/OFF
 Alarm period Approx. 2.5 sec
 Alarm output N.C., 24VDC 0.2A max.
 Tamper switch N.C., Open when cover is removed.
 Tamper output 24VDC 0.1A max.
 PIR sensitivity/range Switchable LOW/MID/HI
 Warm up period Approx. 30 sec
 Power input 9.5 to 16VDC
 Current consumption 8mA (normal), 11mA (max.) at 12VDC
 Dimensions H93.4mm x W61.4mm x D46.0mm
 Weight Approx. 70 g (with bracket: 90 g)
 Operating temperature -20°C to +50°C (-4°F to +122°F)
 Environmental humidity 95% max.
 RF interference No alarm 10V/m

FEATURES:

Digital Quad Technology PIR Motion Sensor with Intelligent Pet Immunity.
 Detection Range 12m
 Multi Angle wall bracket.
 ABS Housing.

DUAL TECH MAGNETIC CONTACT



Microcontroller based Dual Technology Magnetic Contact with inbuilt Digital Multi Function Detector. Magnetic Contact Opening Gap 12-15mm. Inbuilt Digital Multi Function Detector. Detects vibration, breaking off glass, cutting off aluminium frames or grills.

Features:

Microcontroller based Dual Technology Magnetic Contact with inbuilt Digital Multi Function Detector.
 Magnetic Contact Opening Gap 12-15mm.
 Inbuilt Digital Multi Function Detector.
 Detects vibration
 Breaking of glass
 Cutting off aluminium frames or grills.



METAL SHUTTER CONTACT

Metal housing, material aluminium alloy, 2 wire , contact rating 10W, Opening gap 50 – 60mm.

Features:

- Metal housing
- Material aluminium alloy
- 2 wire
- Contact rating 10W
- Opening gap 50 – 60mm.



SOUNDER 12V

High power 130 db, Police Siren Sound, Suitable for Indoor and Outdoor application., Tamper Loop. Two sound speed options available. White ABS Housing.

Features:

- High power 130 db
- Police Siren Sound
- Suitable for Indoor and Outdoor application
- Tamper Loop
- Two sound speed options available
- white ABS Housing.



BEAM DETECTOR 40 Mtr

Beam Detector with dual beam, 40 meter detection range, High grade spherical lens, Automatic Gain Control, Adjustable beam interruption period, IP 65, Lightning protection, Easy angle alignment.

Features:

- Beam Detector with dual beam
- 40 meter detection range
- High grade spherical lens
- Automatic Gain Control
- Adjustable beam interruption period

TECHNICAL SPECIFICATION:

- Detection Range : 40 Meter
- Arrival Distance : 400 Meter
- Technology : IR interruption detection time frame selectable
- 50msec/100msec/250msec/500msec
- Operating Voltage : 11V DC to 28V DC
- Rating Current : 38 mAmp
- Alarm Contact : Normally Connected 28V DC , 0.2Amp
- Beam Blocking Stability : 99%
- Operating Temperature : 60 degrees Max.
- Environmental Humidity : 95%
- Alignment Angle : 90 degrees H , 5 degrees V



ACOUSTIC GLASS BREAK DETECTOR

Intelligent acoustic-based detection of breaking glass. Securico's Acoustic glass break detector helps in detecting the intrusion attempts into an area by breaking a window or glass.

Detecting destruction of the following types of glasses: common, quenched, patterned, armoured, multilayer and protected with polymer tape (laminated), glass hollow blocks, as well as standard double- and triple-chamber windows, adjustable sensitivity.

TECHNICAL SPECIFICATION:

Power supply, V DC : 9 to 17 V
 Current consumption, max : 22 mA
 IP rating : Ip30
 Operating temperature : -20° to +45°C
 Dimensions : 65x65x30 mm
 Detection range : At minimum controlled area of 0.1 m2: 6 m
 At minimum controlled area of 1.0 m2: 9 m

FEATURES OF ACOUSTIC GLASS BREAK DETECTOR :

Intelligent acoustic-based detection of breaking glass.
 Detecting destruction of the following types of glasses: common, quenched, patterned, armored, multilayer, and protected with polymer tape (laminated)
 Detection range: 6-9m
 Installation height: 2m
 Alarm Message Duration: Not less than 2 sec
 Generates Alarm message by alarm loop contact opening

Intrusion alarm Kit Includes			
SI	Product	Description	Quantity
1	Intrusion Control Panel-Wired	Micro-controller based 24 zones control panel, Can expand up to 40 wired zones with expansion	1
2	PIR Motion Sensor	PIR Motion Sensor with Intelligent Pet Immunity	6
3	Dual Technology Magnetic Contact	Microcontroller based Dual Technology Magnetic Contac	4
4	Shutter Contact	METAL SHUTTER CONTACT	2
5	Sounder	High power 130 db, Police Siren Sound	3
6	Beam Detector 40Mtr	BEAM DETECTOR 40 Mtr	1
7	Glass break Detector	ACOUSTIC GLASS BREAK DETECTOR	5

Please Note: Product Specification and Model can be Changed without any Prior Notice