

FTA-AD3-SPW1-17P

- ✓ 22M Head
- ✓ 70M Head
- ✓ 132M Head

58 L/min @ 1500W
41.6 L/min @ 1500W
8.3 L/min @ 1500W



CONTROLLER

- ✓ LED Display
- ✓ AC 150-240V & DC 60-450V
- ✓ Run-Dry & Tank Full Switch Inputs

**Hybrid
AC / DC**



**FTA SOLAR
ECO HYBRID**

www.fta-solar.com.au

PUMP END

- ✓ Multi-stage Centrifugal
- ✓ NEMA Splined Rotor
- ✓ 304SS Body & Plastic Impellers

**1.5"
Outlet**



MOTOR

- ✓ Encapsulated Windings
- ✓ NEMA Splined Rotor
- ✓ Kingsbury Thrust Bearing

**3" 304SS
Water
Filled**



1300 454 420



info@waterborepump.com.au



fta-solar.com.au

Model Description



4 SP 3 - 3

Stages

Rate Flow (m³/h)

Type range

Minimum suit boreholes (inch)

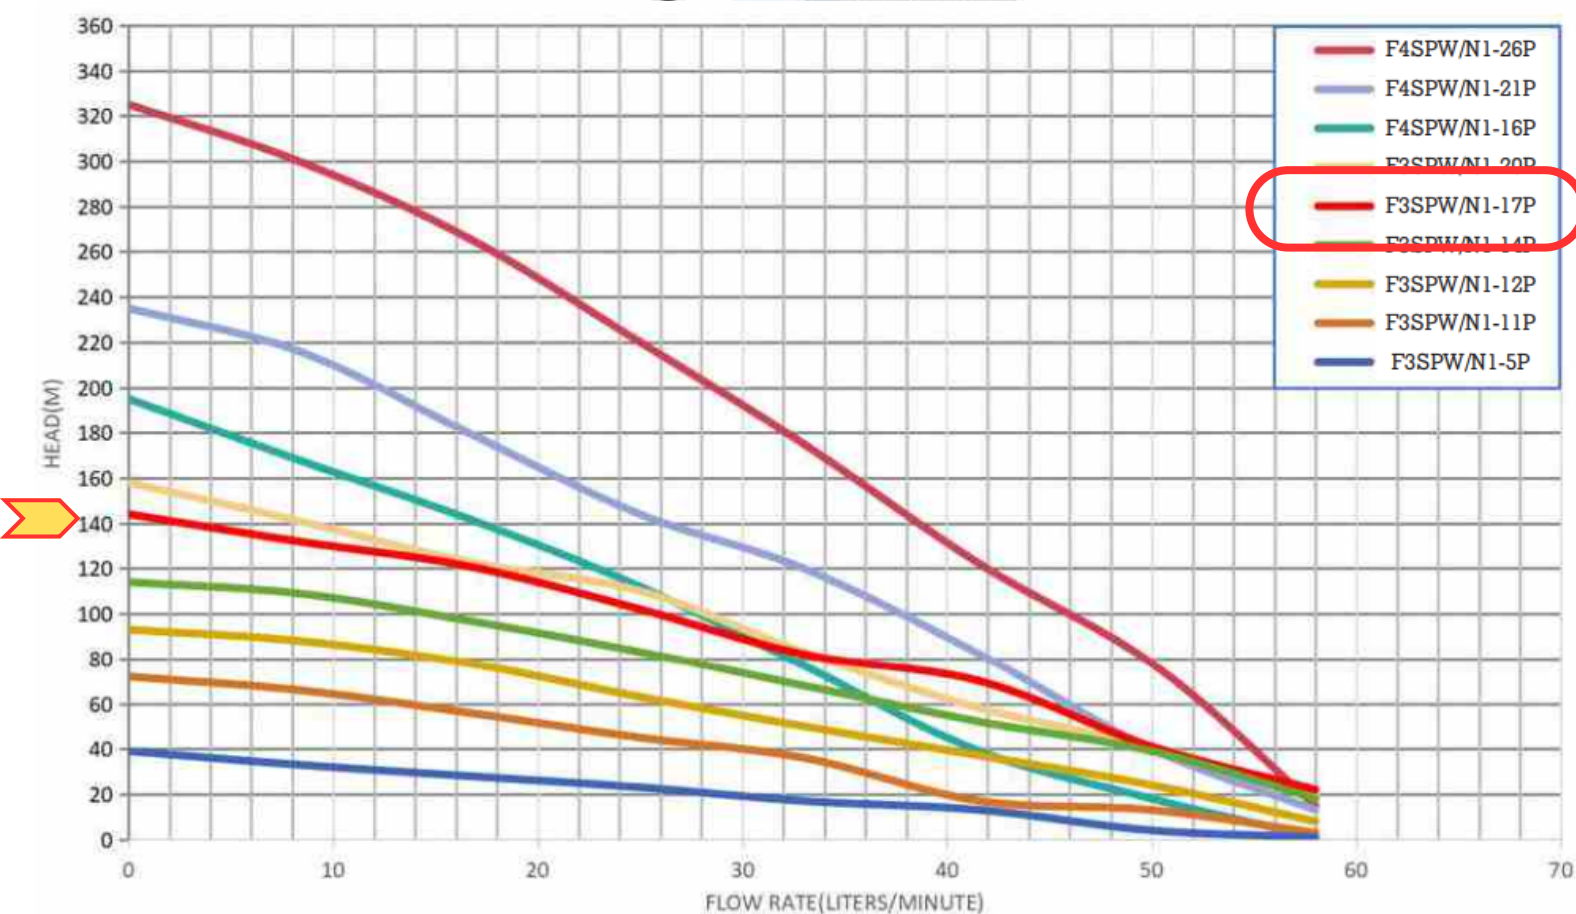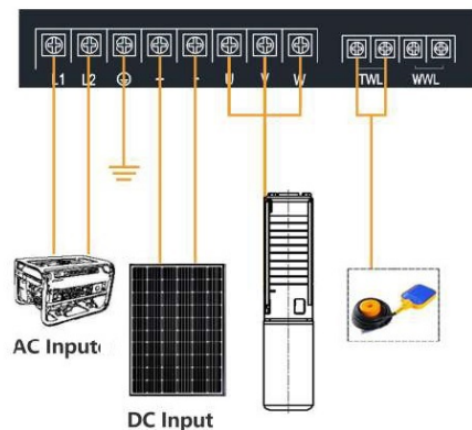

Performance Data

Model	Flow (l/m)	0	8.3	16.6	25	33	41.6	50	58
F3SPW/N1-5P	Head in m	39	33	28	23	17	13	4	1
F3SPW/N1-11P		72	66	56	45	36	17	13	3
F3SPW/N1-12P		93	88	78	63	50	37	24	8
F3SPW/N1-14P		114	100	87	69	58	52	30	18
F3SPW/N1-17P		144	132	121	102	82	70	41	22
F3SPW/N1-20P		150	141	128	110	88	56	41	20
F4SPW/N1-16P		195	168	142	112	77	39	18	1
F4SPW/N1-21P		235	216	180	144	120	82	40	13
F4SPW/N1-26P		325	300	266	220	175	122	78	15