

2" 3" 3.5" HIGH QUALITY LED DOWNLIGHTS SPOTLIGHTS SERIES

LIPAI's movable downlights can make single CCT, 3CCT and 5CCT adjustable with isolated flicker-free metal drivers, available to Triac dimmable, 120-277/347V 0-10V dimmable. There're multiple cut out, color, shape, wattages and design available to meet your demands. Air Tight and IC Rated. Easy installation for remodel and new constructions can save some money and labour. It's a mature, flexible and widely used product series, which can deal with challenges of lighting performance criteria for high-end hospitality, residential projects and hotels etc.

Space Suggestion
(Between Wall And
Lights): 15-20cm

Anti-glare Design

The Refractive Materials And
Deep Cone Can Prevent Dazzle




The range of anti-glare > 30°

LED Downlight - -2C1043



Aluminum, Good Heat Dissipation , Longer Lifespan

Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
2C1043	2inch	COB	8		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
3C1043	3inch	COB	12	100-130V 100-277V	90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
3C1043	3inch	COB	15	100-347V	90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
4C1043	3.5inch	COB	20		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes




Optical Reflector





Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
-3F1043	3inch	COB	12	100-130V 100-277V 100-347V	90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
3F1043	3inch	COB	15		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
4F1043	4inch	COB	20		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
-F1043B	3inch	COB	2*12		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
3F1043B	3inch	COB	2*15		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes
4F1043B	4inch	COB	2*20		90/100	15°/24°/36°/60°	Ra90	2700-6000	50000	Yes

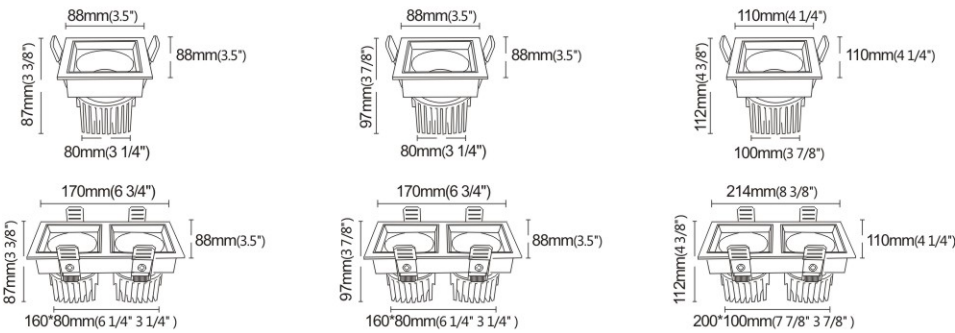

Opitcal Reflector



1" 2" 3" 3.5" 4" 5" 7" 8" MINI COB LED DOWNLIGHT SERIES (HIGH LUMEN)

LED Downlight - -15C1047




High Lumens LED
High CRI 90











Strong Stainless Clip & Plastic Tip
Easy to Install



Aluminum, Good Heat Dissipation, Longer Lifespan

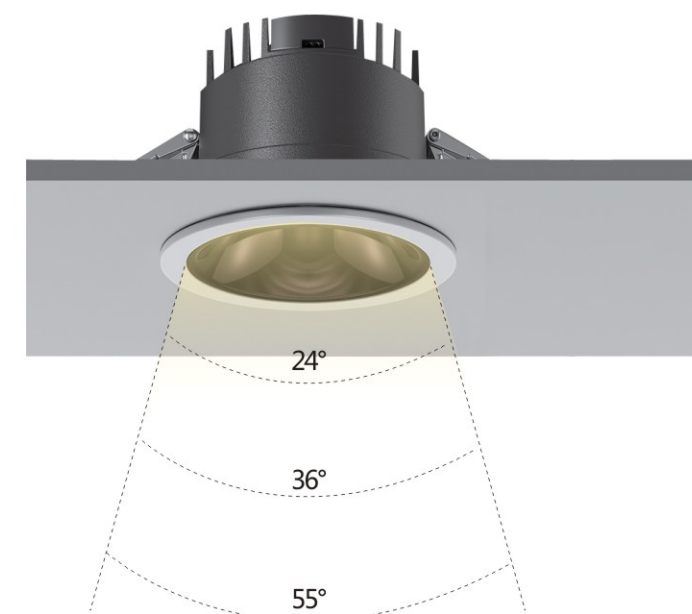

Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
15C1047	1inch	COB	7		90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
2C1047	2inch	COB	10		90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
25C1047	3inch	COB	12		90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
35C1047	3.5inch	COB	15/18	100-130V 100-277V	90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
4C1047	4inch	COB	22	100-347V	90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
5C1047	5inch	COB	35		90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
6C1047	7inch	COB	45		90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes
8C1047	8inch	COB	55		90/100	24°/36°/55°	Ra90	2700-6000	50000	Yes



Optical Reflector



Silver



Matt White



Matt Black



Shiny Silver




Rose Golden



Shiny Black




5CCT Switch Selection






HIGH POWER LED DOWNLIGHT

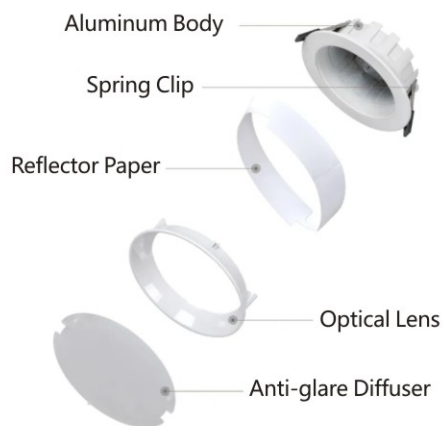

Model	Size(mm)	Cut out(mm)	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
DC5202	75*H40	55-65	SMD	7	100-130V 100-277V 100-347V	90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DC5203	100*H43	75-90	SMD	9		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DC5204	120*H43	90-110	SMD	12		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DC5205	150*H45	120-140	SMD	15		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DC5206	175*H50	140-165	SMD	18		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DC5207	197*H50	160-185	SMD	24		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DC5208	230*H55	190-220	SMD	36		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes

Optical Reflector

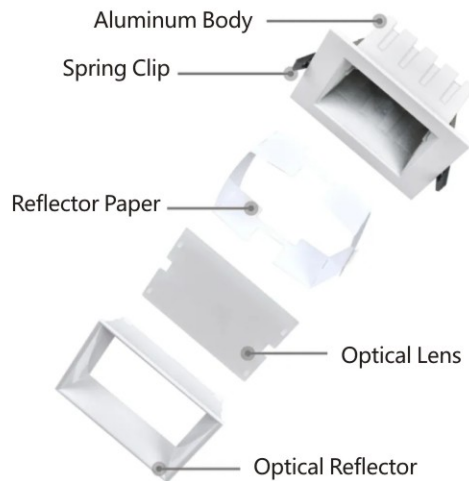

Model	Size(mm)	Cut out(mm)	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
DF5203	100*100*H44	75*75	SMD	9	100-130V 100-277V 100-347V	90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5236	100*183*H43	75*160	SMD	2*9		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5204	120*120*H44	90*90	SMD	12		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5248	120*220*H43	90*195	SMD	2*12		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5205	150*150*H45	120*120	SMD	15		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5255	175*175*H50	140*140	SMD	18		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5206	197*197*H50	160*160	SMD	24		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes
DF5208	230*230*H55	190*190	SMD	36		90	90°/100°/110°	Ra80/Ra90	2700-6000	50000	Yes

Optical Reflector






Switch between three color temperature modes



Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
GCTD4	4 inch	SMD	10-20	100-130V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes
GCTD6	6 inch	SMD	20-40	100-277V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes
GCTD8	8 inch	SMD	40-60	100-347V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes

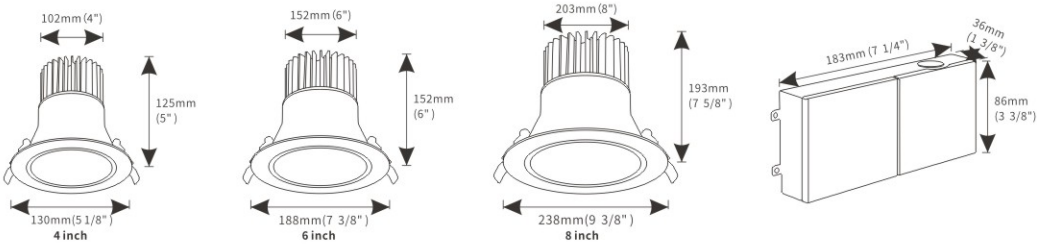

- Trim Finish: White,Black,Brush Nickel.Chrome (Aluminum Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current



SMART EMERGENCY BATTERY BACKUP DOWN LIGHT




BATTERY BACKUP




Smartphone
Control



Model	Trim Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
E2-DL4-24W EBBU	4 inch	SMD	10-20	100-130V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes
E2-DL6-40W EBBU	6 inch	SMD	20-40	100-277V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes
E2-DL8-40W EBBU	8 inch	SMD	40-60	100-347V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes

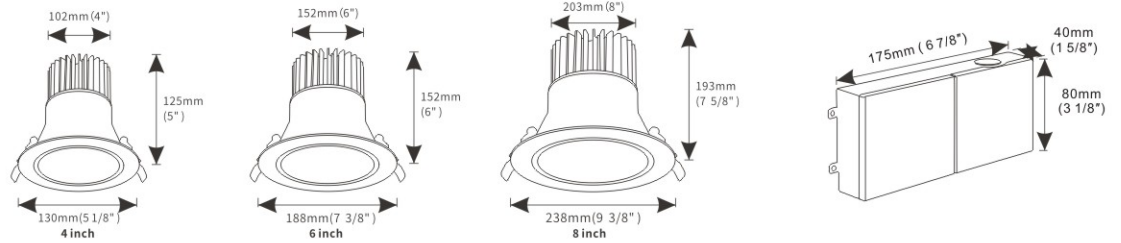

- Trim Finish: White,Black,Brush Nickel.Chrome (Aluminum Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current








Switch between three color temperature modes



Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
GCTD4-A	4 inch	SMD	10-20	100-130V 100-277V 100-347V	90/100	60°	Ra80/Ra90	2700-6000	50000	Yes
GCTD6-A	6 inch	SMD	20-40		90/100	60°	Ra80/Ra90	2700-6000	50000	Yes



- Trim Finish: White, Black, Brush Nickel, Chrome (Aluminum Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current



SNAP-ON TRIM LED COMMERCIAL DOWNLIGHT






One module can compatible with 3 different trims


SWITCHABLE REFLECTORS



Switch between three color temperature modes

Model	Trim Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
GCTD	6 inch	SMD	30/40/55	100-130V 100-277V 100-347V	90/100	60°-80°	Ra80/Ra90	2700-6000	50000	Yes
GCTD	8 inch	SMD	30/40/55		90/100	60°-80°	Ra80/Ra90	2700-6000	50000	Yes
GCTD	10 inch	SMD	30/40/55		90/100	60°-80°	Ra80/Ra90	2700-6000	50000	Yes



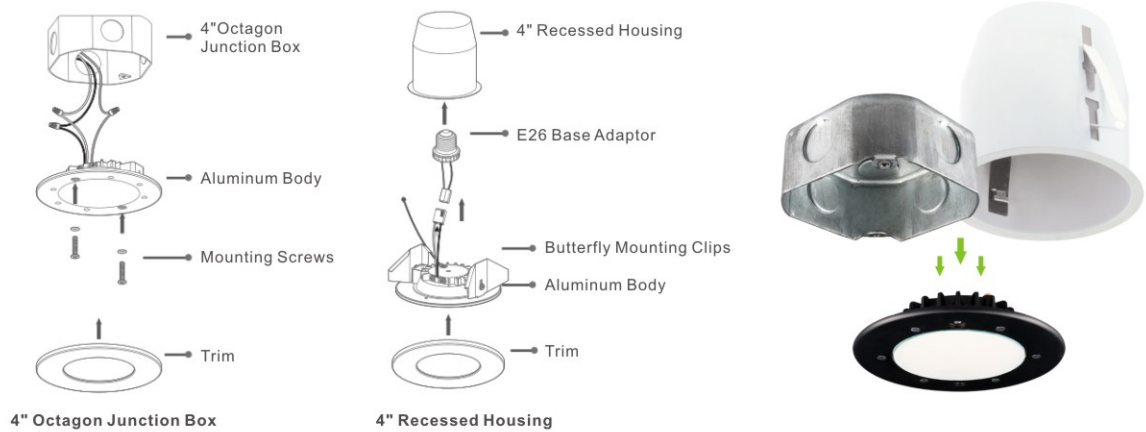

Package Includes White Magnetic Trim Other Stock Colors are Black and Brushed Nickel Sold As Accessories
Available Trims by Custom Order: Brushed Copper, Chrome



DESCRIPTION

4" Multi LED - Fits in J-Box or Can
Recessed Fixture Look Due to Very Thin Trim
Magnetic Trims with Optional Colors

FEATURES & BENEFITS

Meets Fire Rating Code When Used in a Fire Rated J-Box
Wet Location - Suitable for Showers & Outdoor
5CCT User Selectable or Single Light Color (3K or 4K) Options
CRI 90+ for True Color Rendering

DIMENSIONS ID 3 1/2" OD 4 7/8"

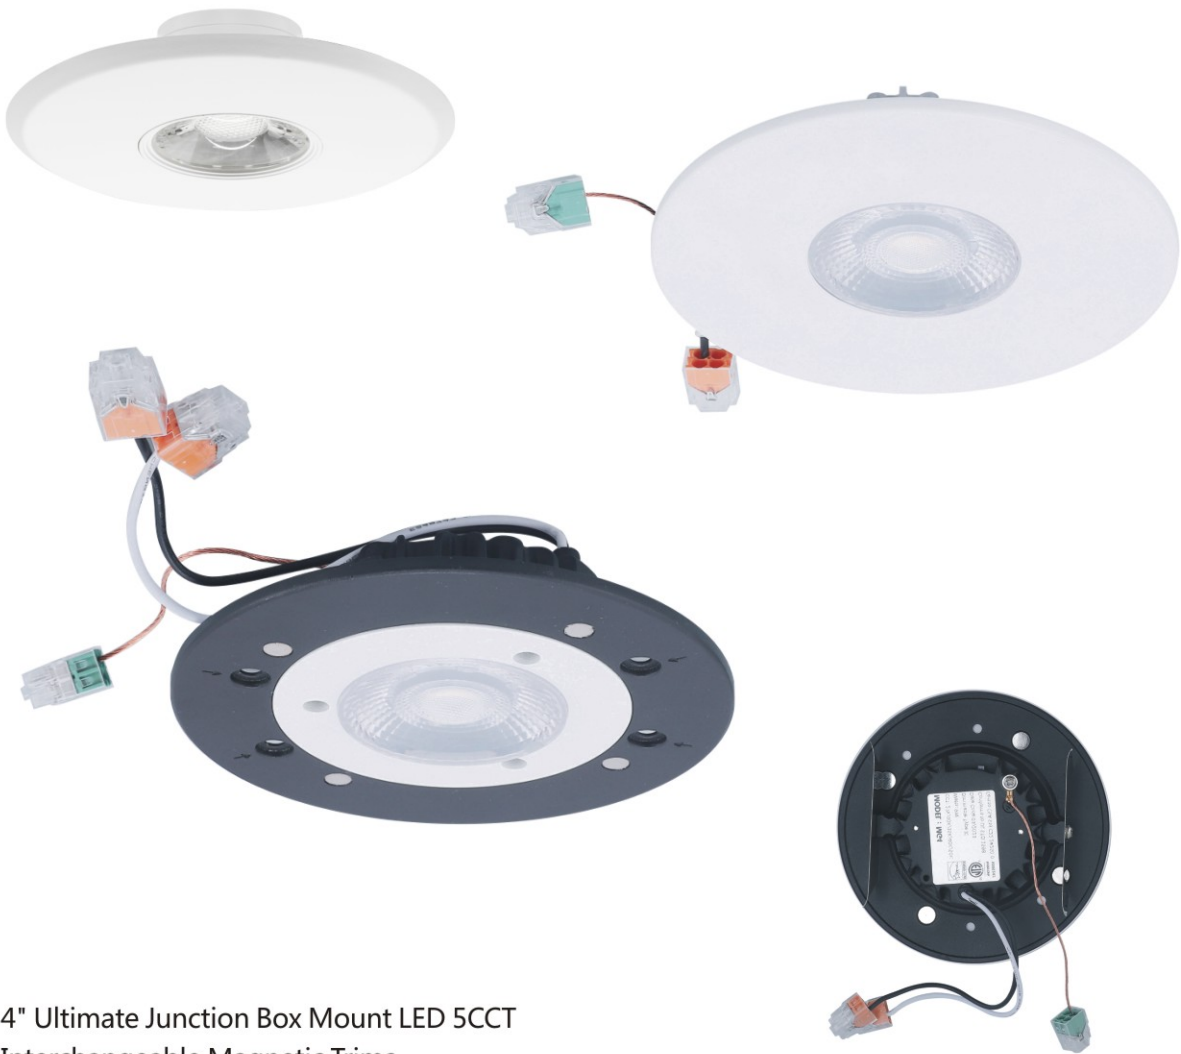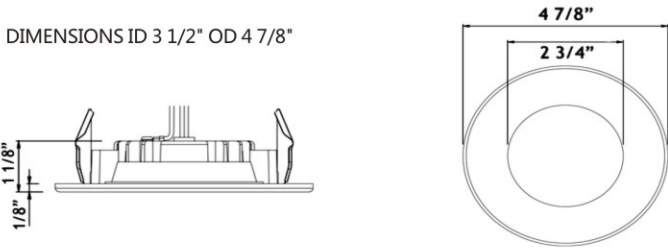

4" Ultimate Junction Box Mount LED 5CCT
Interchangeable Magnetic Trims




Round White Round Black Square White Square Black

FEATURES & BENEFITS

Round & Square, White & Black trims
Fits in 4" octagon plastic junction boxes 2 1/8" deep
Up to 740 lm with CRI 90+ for True Color Rendering
5CCT user selectable-2700K, 3000K, 3500K, 4000K, 5000K
60° wide directional light beam for reduced glare
Fire rated when used with a fire rated junction box
Wet Location certified - could be installed in soffits
Regressed look - only 1/8" visible thin trim
Triac Dimmable down to 5%


DIMENSIONS: OD 4 7/8" ; Depth 1 1/8" ; Visible Trim Thickness 1/8"

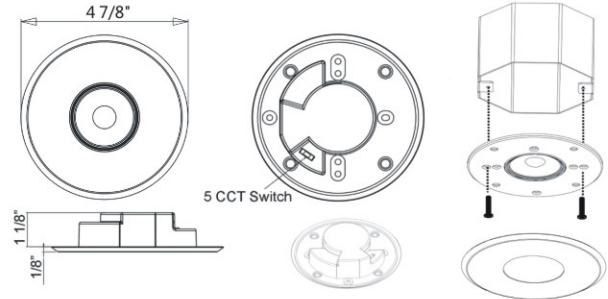


LED Disk Light — FD153/188/200




5" 7" 8" Surface Mount Backlit LED Disk
Fast & Easy to Install in J-Box – Save on Labor
Wet Location – Suitable For Showers & Soffits
CRI 90+ for True Color Rendering
Triac Dimmable Down to 10% Flicker Free
Warranty: 3 Years

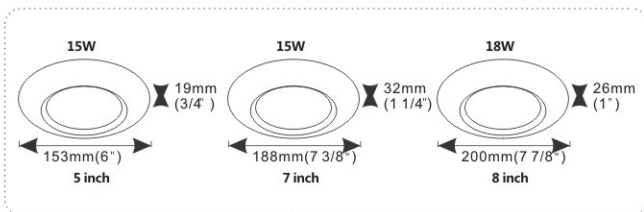

SMART EMERGENCY BATTERY
BACKUP LED CEILING LIGHT

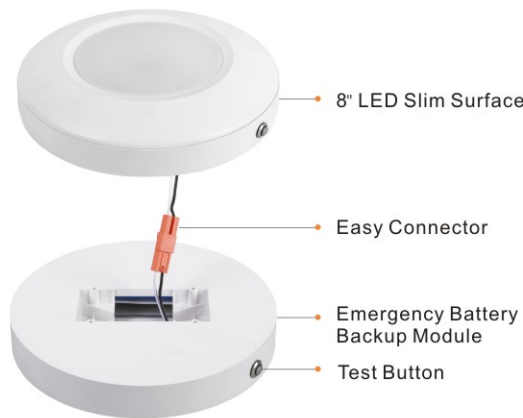

Guarantees 2 hours operation from
battery in case of power outage



LED Retrofit Downlight - MG4/MG6



- Color Adjustment
- Works with Amazon Alexa
- Smartphone Control
- iOS/Android
- Dimming
- Timer Mode



Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
MG4	4 inch	SMD	9	100-130V 100-277V	90	70°	Ra80/Ra90	RGBCW	50000	Yes
MG6	6 inch	SMD	15	100-347V	90	70°	Ra80/Ra90	RGBCW	50000	Yes



- Trim Finish: White, Black, Brush Nickel, Chrome (Aluminum Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current



- 100-130V 5CCT Adjusted by DIP switch: 27K/30K/40K/50K/60K
- Bluetooth and RGB + CCT Changeable Smart Control: 27K/30K/40K/50K/60K
- Bluetooth, WiFi and RGB + CCT Changeable Smart Control: 27K/30K/40K/50K/60K








Smooth / Baffle




Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
MG3	3 inch	SMD	7	100-130V 100-277V 100-347V	90	70°	Ra80/Ra90	2700-6000	50000	Yes
MG4	4 inch	SMD	9		90	70°	Ra80/Ra90	2700-6000	50000	Yes
MG6	6 inch	SMD	15		90	70°	Ra80/Ra90	2700-6000	50000	Yes



Compatible with 4inch, 5inch or 6inch LED Retrofit Housing Can




- Trim Finish: White, Black, Brush Nickel, Chrome (Iron Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current



5CCT Dip Switch

Dim To Warm

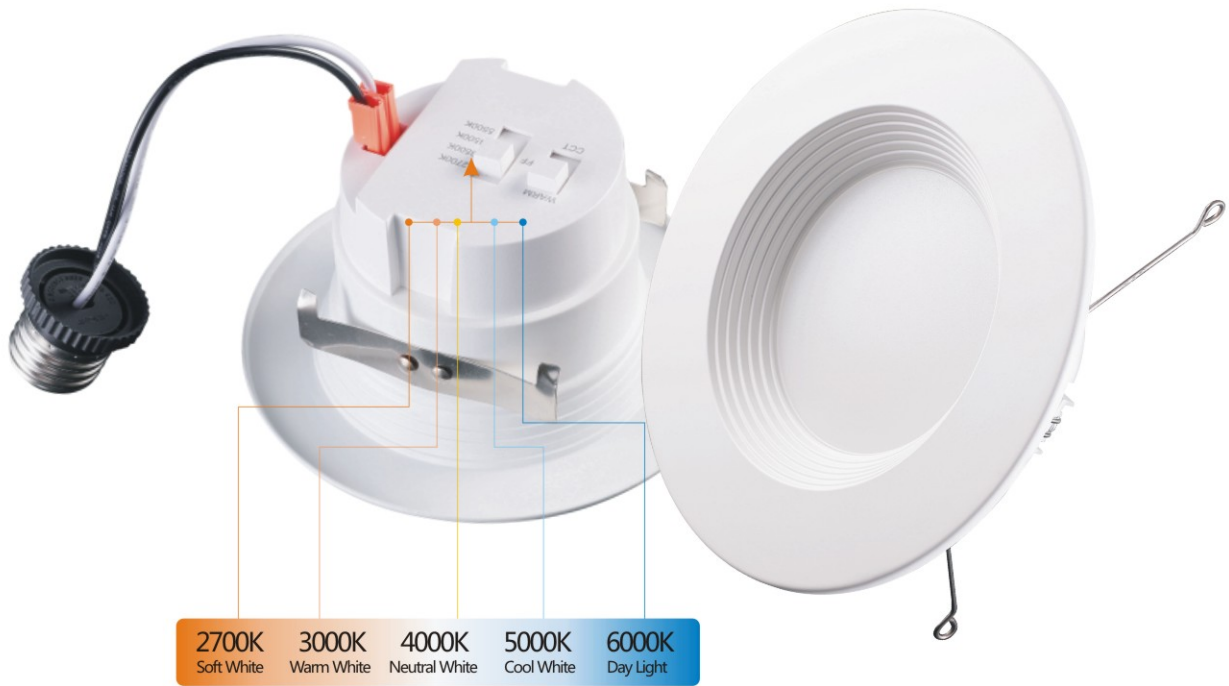

Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
MG3	3 inch	SMD	7	100-130V 100-277V 100-347V	90	70°	Ra80/Ra90	2700-6000	50000	Yes
MG4	4 inch	SMD	9		90	70°	Ra80/Ra90	2700-6000	50000	Yes
MG6	6 inch	SMD	15		90	70°	Ra80/Ra90	2700-6000	50000	Yes

