

*# 12"15"
Round Panel*



- ETL approved.
- 5 CCT selectable.
- Nightlight optional.
- Light weight.
- Drop ceiling, flush mount lighting installation.
- Smooth, uniform dimmable : 10%-100% dimming range, compatible with most household triac LED dimmers.
- Damp-rated.

Code	Power	CCT	Dimension	Lumens	Voltage	CRI	Material	Beam Angle	Dimming
RCLR12-5CT	22W	2700/3000/3500/4000/5000K Selectable	φ 300*24mm	1500lm	120VAC	80	PP or PC	110°	Triac
RCLR12-6CT	22W +Night Light	2700/3000/3500/4000/5000K Selectable+2000K	φ 300*34mm	1500lm					
RCLR15-5CT	28W	2700/3000/3500/4000/5000K Selectable	φ 400*24mm	1950lm					
RCLR15-6CT	28W +Night Light	2700/3000/3500/4000/5000K Selectable+2000K	φ 400*34mm	1950lm					


- ETL approved.
- 3 CCT selectable.
- Nightlight optional.
- Slim modern flush mount design.
- Bright LED light.
- Smooth, uniform dimmable : 10%-100% dimming range, compatible with most household triac LED dimmers.
- Damp-rated.

32" Oval Panel



Code	Power	CCT	Dimension	Lumens	Voltage	CRI	Material	Beam Angle	Dimming
RCLR32-3CT	38W	3000/4000/5000K Selectable	812*457*28mm	3000lm	120VAC	80	PC+Iron	110°	Triac
RCLR32-6CT	38W+ Night Light	3000/4000/5000K Selectable+2000K	812*457*36mm	3000lm					

COMMERCIAL

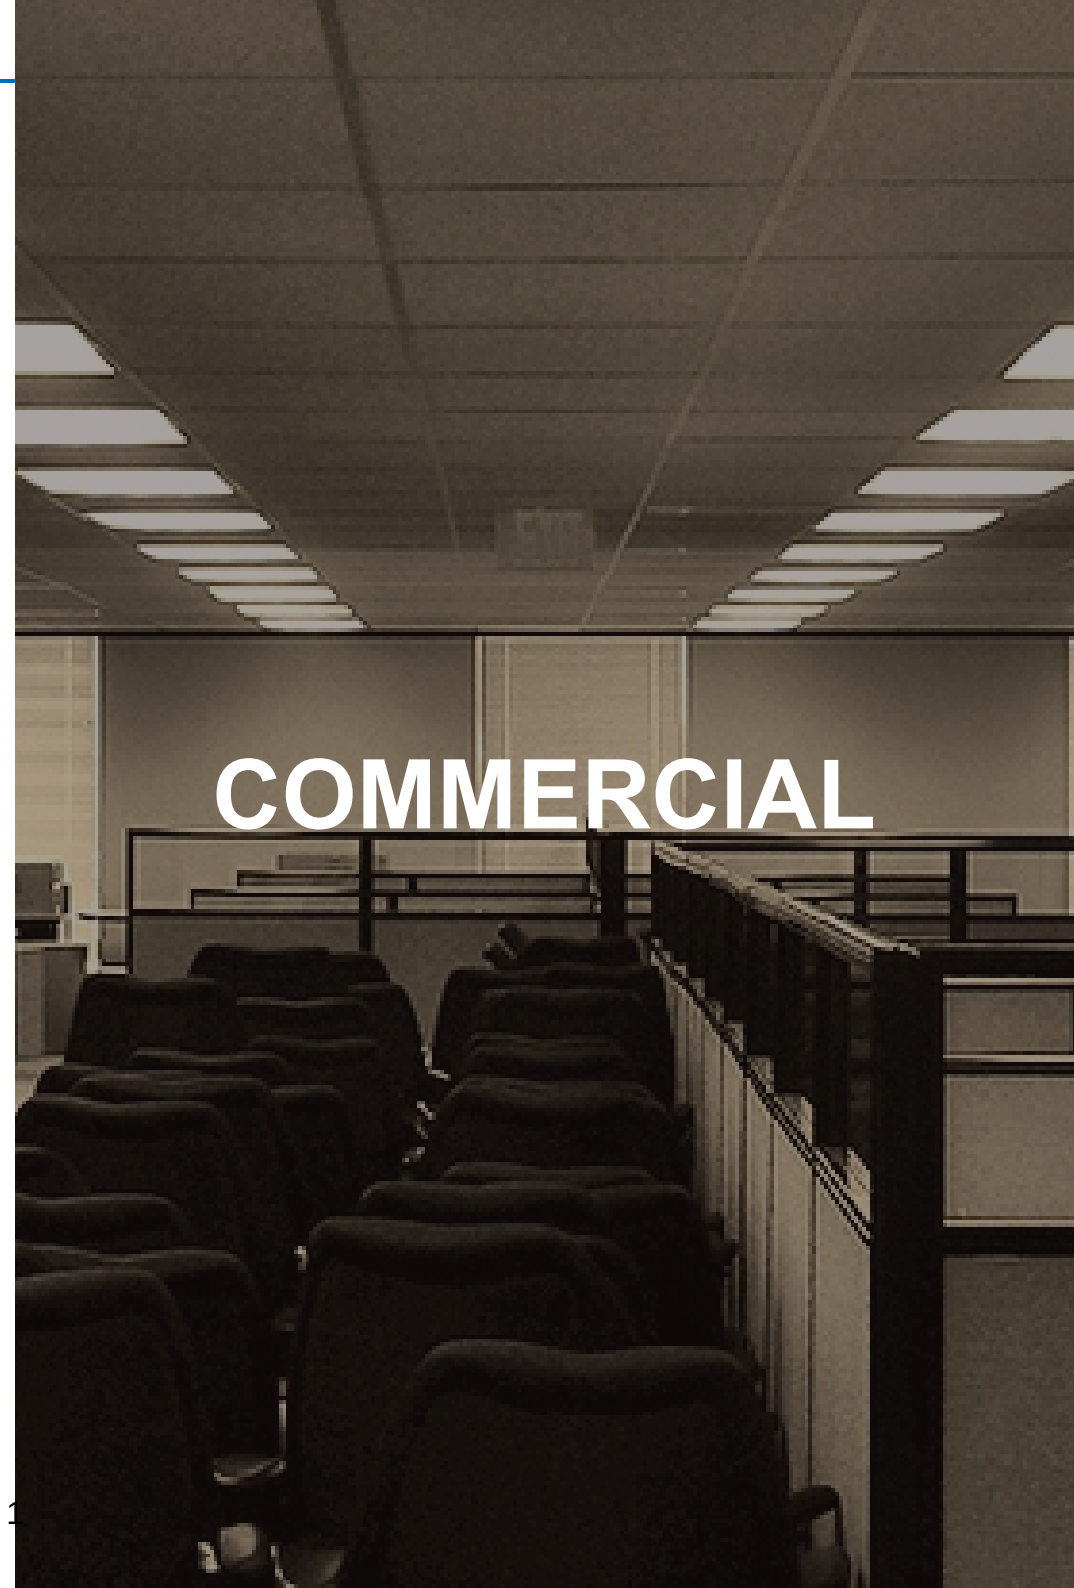

Square Panel



- ETL approved.
- CCT selectable & lumen selectable optional.
- Night light optional.
- Aluminium frame.
- Different frame color white, silver, ORB & brush optionals.
- High brightness with efficient LEDs.
- Smooth, uniform dimmable : 10%-100% , dimming range, compatible with most , household triac LED dimmers.
- Damp rated.

Code	Power	CCT	Dimension	Lumens	Voltage	CRI	Material	Beam Angle	Dimming
IPN2-1040-3CT	48W	3000/4000/5000K Selectable	1190*303*33mm	4800lm	120VAC -347VAC	80	Aluminium + PC	110°	Triac
IPN2-1040-5CT	24/30/40W Selectable	3000/4000/5000/6000K Selectable	1190*303*33mm	2400-4000lm					
IPN2-2040-3C	70W	3000/4000/5000K Selectable	1190*603*33mm	7000lm					


Recessed Panel



- Material: aluminium frame.
- Power & CCT Selectable optionals.
- 100-277V and 0-10V dimming.
- Recessed & easy installation: drop this ultra-light panel right on the lay-in t-bar ceiling, easily recess the panel while replace fixtures or for new construction project.
- ETL approved, damp-rated.
- 5 years warranty.


Code	Power	CCT	Size	Lumens	Voltage	CRI	Material	Beam Angle	Dimming
PN22-40-3CT	25/30/40W Selectable	3500/4000/5000K Selectable	2'x2'	4000-4400lm	120-347VAC	80	Aluminium + PC	110°	0-10V
PN14-50-3CT	30/40/50W Selectable	3500/4000/5000/6000K Selectable	1'x4'	4000-4400lm					
PN24-50-3CT	30/40/50W Selectable	3500/4000/5000K Selectable	2'x4'	5000-5500lm					

LED Linear Light

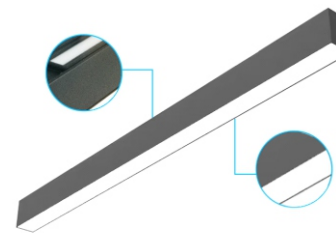

LSFC

- CCT & Wattage Selectable.
- Seamless connection.
- Dimmable and color changeable.
- Flexible combination.
- 2ft/4ft/8ft, white or black body available.
- Glow down or glow down & up.
- Universal dimming: 0-10 dimming.

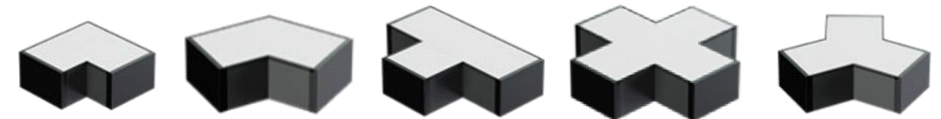


Code	Size	Wattage	CCT	Efficiency	Voltage	CRI	Material	Dimming
LSFC- 20-3CT	2"	15/20/25W Selectable	3 CCT Selectable	100lm/w	100-347VAC	80	Aluminium+ PC	0-10V dimming
LSFC- 40-3CT	4"	30/40/50W Selectable						
LSFC- 100-3CT	8"	60/80/100W Selectable						
Connectors	V/L/Y/T/+	8/10/12W Selectable						

Linear Light

- Material: aluminium body + PC.
- Free flicking.
- Anti-glare.
- High light efficiency reached to 130lm/W.
- High stability of constant current.

LED Linear Light

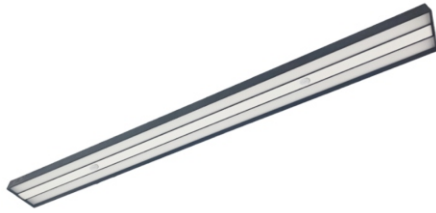

Code	Size	Power	CCT	Efficiency	Voltage	CRI
FC-36	1184*10*32mm	36W	5000K or 6000K	130lm/W	120-347V	80

Track Light



TRACK LIGHT

- Anti-glare & free flicking.
- Die-cast aluminium material.
- Rotating bracket.
- 69° * 23° beam angle.
- Body adjustment angle >30°.

Code	Size	Power	CCT	Voltage	CRI
FC060	245*16*90mm	40W	2600~6500K	120~347VAC	90



INDUSTRIAL

High Bay Light



WCF

- Seamless die-cast aluminium and the heat sink fin design for rapid heat dissipation.
- Easy installation.
- High brightness & bill saving.
- Widely application.

Code	Power	CCT	Efficiency	Voltage	CRI	Material
HB150WCF	150W	2600K-6000K	120-130LPW	100-347 VAC	80	Die-cast aluminium body,PC Lens

High Bay Light



WCD

- ETL/cETL listed for wet locations.
- 0-10V dimming optional.
- Ultra thin die-cast aluminium body.
- LM80 SMD LED & Luminous efficacy up to 130lm/w.

Code	Power	CCT	Efficiency	Voltage	CRI	Material
HB150 WCD-XXX	150W	2600K-6000K	120-130LPW	100-347 VAC	80	Die-cast aluminium body,PC Lens
HB200 WCD-XXX	200W					

High Bay Light



WCS

- ETL/cETL listed for wet locations.
- IP66 rated.0-10V dimming standard.
- High heat dissipation design.
- Emergency battery optional.

Code	Power	CCT	Efficiency	Voltage	CRI	Material
HB100WCS	100W	2600K-6000K	130LPW	100-347 VAC	80	Die-cast aluminium body,PC Lens
HB150WCS	150W					
HB200WCS	200W					
HB240WCS	240W					

WCS2

- ETL/cETL listed for wet locations, IP66 rated.
- Sensor base standard
- Easily installed motion sensor.
- Durable and light weight die-cast body designed for pendant mounting.
- Wattage & CCT selectable.
- 0-10V dimming standard.

High Bay Light



Code	Power	CCT	Efficiency	Voltage	CRI	Material	Dimming
HB120WCS2	80W/100W/120W Selectable	3 CCT Selectable	130LPW	100-347 VAC	80	Die-cast aluminium +PC	0-10V dimming
HB150WCS2	90W/120W/150W Selectable						
HB200WCS2	120W/160W/200W Selectable						
HB240WCS2	150W/200W/240W Selectable						

High Bay Light



WCE

- Ultra-thin aluminium body.
- Super bright light.
- Light weight body.
- No yellowing lightly frosted glass lens.

Code	Power	CCT	Efficiency	Voltage	CRI	Material
HB-WCE	150W	2600K-6500K	90LPW	100-347 VAC	80	Aluminium + Glass

LFS

- Durable extruded aluminium housing LED linear high bay.
- Lumen packages ranging from 18000 lumen to 37500lm.
- Wattage & CCT selectable.
- Polycarbonate lens with frosted diffuser or clear diffuser provided.
- 0-10V dimming standard.
- 320° adjustable/rotating panel.
- 5 Years warranty.

Code	Power	CCT	Efficiency	Voltage	CRI	Material	Installation
LFS-150WXXK	150W	3500/4000K/ 5000K Selectable	130LPW	100-347 VAC	80	Aluminium+PC	Chain/cable mounting/ Threaded rod kit
LFS-200WXXK	200/150/100W Selectable	4000K/5000K Selectable					
LFS-300WXXK	300/240/200W Selectable						

High Bay Light



Vapor Tight Fixture



VFF

- Normal size and slim size both are available.
- J-box Installation supported.
- ETL/cETL listed for wet locations.
- 130 lumens per watt(frosted lens).
- 100-277/120-347VAC universal voltage.
- 0-10V dimming standard.
- 120° 165° beam angle.
- Microwave motion sensor for bi-Level control optional.
- 90 mins emergency battery backup optional.
- 5 years warranty.

Code	Size	Power	CCT	Efficiency	Voltage	Beam Angle	CRI	Material	Installation
VFFR240-50KFP	4"	40W	2700-6000K	up to 130lm/w	100-347 VAC	165	80	PC Body & Diffuser	Surface Mount/ Chain/J-box
VFFR260-50KFP	4"	60W							
VFFR2XX-XXKFP	4"	40/50/60W Selectable	4000/5000/6000K CCT Selectable						
VFFR040-XXXXP	4"	40W	2700-6000K						
VFFR060-XXXXP	4"	60W							
VFFHVXX-XXXXP	4"	40/50/60W Selectable							
VFFR060-XXXXP	4"	32/40/50W Selectable	4000/5000/6000K CCT Selectable						

VFR

- UL/cUL listed for wet locations, IP65 rated.
- DLC 5.1 standard certified.
- 105-130 lumens per watt.
- 100-277VAC universal voltage .
- 0-10V dimming standard.
- Microwave motion sensor for bi-level control optional.
- 90 Mins emergency battery backup optional.

Vapor Tight Fixture



Code	Size	Power	CCT	Efficiency	Voltage	Beam Angle	CRI	Material	Installation					
VFRA4F-XXXXPXX	4"	60W	2700-6000K	105-130lm/w	100-347 VAC	120	80	PC Body & Diffuser	Surface Mount/ Chain					
VFRB4F-XXXXPXX	4"	40W												
VFRC4F-XXXXPXX	4"	40W												
VFRC2F	2"	15/20/25W Selectable	3CCT											
VFRC4F	4"	32/40/50W Selectable												
VFRC4F	4"	60/70/80W Selectable												
VFRC8F	8"	80/90/100W Selectable												

Vapor Tight Fixture



VFOC

- ETL/cETL listed for wet locations, IP66 rated.
- DLC 5.1 standard certified.
- 130-140 lumens per watt.
- 100-277/120-347VAC universal voltage.
- 0-10V dimming standard.
- Microwave motion sensor for bi-Level control optional.
- 90 Mins emergency battery backup optional.
- 5 Years warranty.

Code	Size	Power	CCT	Efficiency	Voltage	Beam Angle	CRI	Material	Installation
VFOC020-XXXXP	2"	20W	2700-6000K	130-140lm/w	100-277 VAC	120	80	PC Body & Diffuser	Surface Mount/ Chain
VFOC040-XXXXP	4"	40W							
VFOC020-XXXXP	2"	16/18/20W Selectable							
VFOC4FXX-XXXXP	4"	32/40/50W Selectable							
VFOCHVXX-3CTXP	4"	32/40/50W Selectable	3000/4000/5000K Selectable		120-347 VAC				
VFOC8F-XXX-XXXXP	8"	80/100/120W Selectable			100-277 VAC				

VFV

- Light efficiency is reach to 125-135lm/W.
- IP65 rated suitable for wet and outdoor locations microwave motion sensor optional.
- 180 mins emergency battery backup optional.
- Single end or both ends power in/out optional.
- 5 years warranty.
- 0-10V / Dali dimming optional.

Vapor Tight Fixture



Code	Size	Power	CCT	Efficiency	Voltage	Beam Angle	CRI	Material	Installation
VFVS2F-XXXC	2"	20W	2700-6000K	125-135LPW	120-347 VAC	120	80	PC Body & Diffuser	Surface Mount/ Chain// J-box
VFVS4F-XXXC	4"	30W							
VFVS4F-XXXC	4"	40W							
VFVS5F-XXXC	5"	30W							
VFVD2F-XXXC	2"	60W							
VFVS4D-XXXC	4"	50W							
VFVD5F-XXXX	5"	70W							

Vapor Tight Fixture



VFC3


- ETL/cETL listed for wet locations. IP65 rated.
- 130 lumens per watt.
- 100-277 VAC universal voltage.
- 0-10V dimming standard.
- Power selectable & CCT selectable.
- One piece (PC) polycarbonate housing body.
- 5 years warranty.

Code	Size	Power	CCT	Efficiency	Voltage	Beam Angle	CRI	Material	Installation
VFC34F-3C056FS	4"	56/48/32W Selectable	3500/4000/5000K Selectable	130lm/w	120-277 VAC	120	80	PC Body & Diffuser	Surface Mount/ Chain
VFC38F-3C120FS	8"	120/96/64W Selectable							

STEP LIGHT

- 3.5W, high out put.
- Aluminium shells, much more durable and corrosion resistant than plastic shells.
- Black/White body color, 3CCT Selectable.
- 120V voltage, 12V or 24V optionals.
- Fits for standard junction boxes (not included).

Step Light

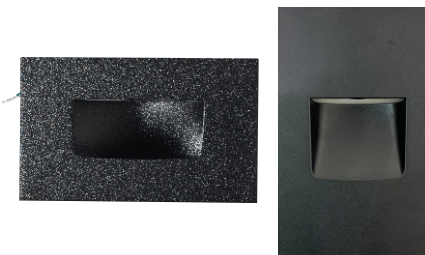

Code	Size	Power	CCT	Voltage	CRI	Material	Beam Angle	Dimming
TJD-03-3CT	120*73*36mm	3.5W	3500/4000/5000K	120V	>90	Die-Cast Aluminium	30	Triac

OUTDOOR

Wall Pack



WPGL

- Wattage & CCT selectable.
- ETL/cETL listed for wet & outdoor Locations.
- Photocell standard.
- 0-10V dimming standard.
- Glass lens.
- 13" & 9" wide body both are available.
- 5 Years warranty.

Code	Size	Power	CCT	Lumens	Voltage	CRI	Material	Installation Way
WPGL075	333*235*133mm	75/60/45W Selectable	3CCT	4500-7500 lm	120-347 VAC	70	Die-cast Aluminium + Glass	recessed outletbox or wall surface
WPGL120	333*235*133mm	120/96/72W Selectable		7200-12000 lm				
WPGL080	225*241*128mm	80/60/45W Selectable		4500-8000 lm				

WPAC

- ETL/cETL listed for wet and outdoor locations.
- Light efficiency is reach to 120lm/w.
- Built- in photocell sensor.
- 120-277VAC input voltage ,with photocell.
- IP65 rated suitable for wet and outdoor locations.

Wall Pack



Code	Power	CCT	Lumens	Voltage	CRI	Material	Installation
WPAC035	35W	2600-6000K	120LM/W	100-347V	>70	Die-cast aluminium + PC	Recessed outlet box or wall surface
WPAC045	45W						
WPAC070	70W						

Wall Pack



WPSL

- Light efficiency is reach to 120lm/w.
- 120-277VAC input voltage.
- IP65 rated suitable for wet and outdoor locations.
- Photocell sensor is standard.
- Adjustable tilt up to 90°

Code	Power	CCT	Efficiency	Voltage	CRI	Material	Installation
WPSL025	25W	2600-6000K	120LM/W	100-347V	>70	Die-cast aluminium + PC	Recessed outlet box or wall surface
WPSL035	35W						
WPSL060	60W						
WPSL080	80W						
WPSL100	100W						
WPSL120	120W						

WPFF

- Solar version available.
- Bronze or pure white color.
- Nightlight optional.
- Motion sensor + dusk to dawn.
- IP65 rated suit for wet location.
- For both indoor and outdoor use.

Security Light



Code	Power	CCT	Efficiency	Voltage	CRI	Material	Installation
WPFF-36-XXK	36W	2600-6000K	100LM/W	120V	>70	PC diffuser	Recessed outlet box or wall surface
WPFF-36-XXX	36W	2600-6000K +Nightlight					
WPFF-10-XXX	10W	2600-6000K					

Barn Light



WPGD

- ETL/cETL listed for wet and outdoor locations.
- 120 lumens per watt.
- 100-277VAC or 120V input voltage.
- IP65 rated suitable.
- Photocell sensor is standard.
- 5 years warranty.

Code	Power	CCT	Efficiency	Voltage	CRI	Material	Installation
WPGD040	40W	2600-6000K	100LM/W	120V	>70	Die-cast aluminium +PC	Direct mounting& Arm mounting
WPGD080	80W						

CPSM

- ETL/cETL listed for wet locations, IP65 rated.
- 120 lumens per watt.
- 100-277V universal voltage.
- 0-10V dimming optional.
- Photo control available.
- Low-profile appearance with shock proof. polycarbonate lens.

Canopy Light



Code	Power	CCT	Efficiency	Voltage	CRI	Installation
CPSM040	40W	2600-6000K	120LM/W	100-347VAC	>70	Surface mounted
CPSM050	50W					
CPSM060	60W					
CPSM080	80W					
CPSM0100	100W					
CPSM0120	120W					

Mini Wall Pack

**WPMN**

- ETL/cETL listed for wet and outdoor location.
- Heavy duty die-cast aluminium housing, fully sealed to be dirt and bug proof.
- Traditional elegant design.
- Long life driver.

Code	Power	CCT	Efficiency	Voltage	CRI	Material	Installation
WPMNL015	15W	2600-6000K	105-110 LM/W	120-347 VAC	70	Die-cast aluminium +PC	recessed outletbox or wall surface
WPMNL025	25W						
WPMNL030	30W						

Shoebox Light

**SBAL2**

- Wattage selectable.
- 0-10V dimming standard.
- Photocontrol sensor for dusk to dawn operation.
- With surge protector.
- 5 Years Warranty.

Code	Power	CCT	Efficiency	Voltage	CRI	Material	Installation
SBAL200	100/150/200W selectable	2600-6000K	120-130 LM/W	100-347 VAC	70	Die-cast aluminium+PC	Type A/B mount
SBAL300	200/250/300W selectable						

WPMN2

- ETL/cETL listed for wet and outdoor locations.
- Die cast aluminium body.
- Intergated dusk to dawn photocell.
- Easy installation.
- CCT & wattage selectable.

Mini Wall Pack



Code	Power	CCT	Lumens	Voltage	CRI	Material	Installation
WPMN2030	15/25/30W selectable	3CCT	1500-3000LM	120VAC	70	Die-cast aluminium +PC	recessed outletbox or wall surface
WPMN2030B	30W		3000LM				
WPMN2025	25W		2500LM	120-277 VAC			

