


GL LED 60/80W Canopy Light Fixture

Features:

1. Sealed die-casting profile for indoor and outdoor
2. Lumen output :125lm/W
3. Polycarbonate optical lens with heat resisting
4. Three 1/2" threaded conduit and one 3/4" conduit entry points
5. Voltage input:120-347V,0-10V dimmable
6. Low profile design
7. UL/cUL listed for wet locations



Dimension:

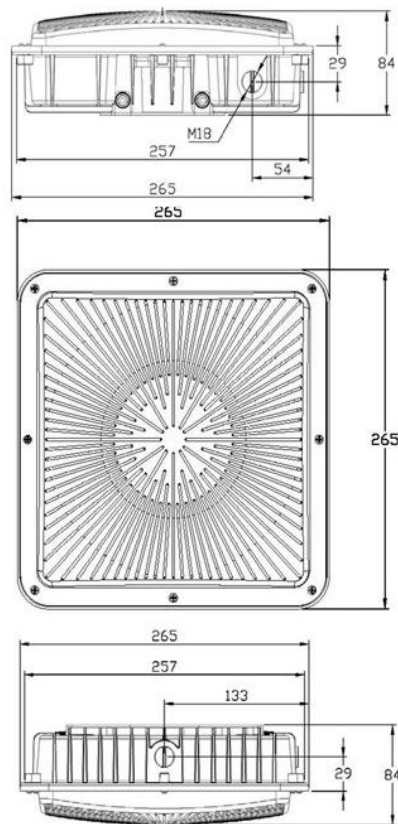

The order code:

GLCPR-	xxW-	xxK- H-	xx
	60W	30: 3000K	OS: occupancy sensor
	80W	35: 3500K	
		40: 4000K	
		50: 5000K	

GLCPR-60W-35K-OS:

The light fixture: power: 60 watts, CCT: 3500K, with occupancy sensor



Canada GL Lighting Technology Inc.





7351 Victoria Park Ave, Unit 3, Markham, ON, Canada, L3R 3A5
T: 905-604-1000 | F: 1-866-756-3987 | info@gl-light.ca | www.gl-light.ca

GL LED CANOPY - INSTALLATION INSTRUCTIONS

WARNING:

- 1, To prevent personal injury or product damage only licensed electricians should install.
- 2, To avoid electric shock or component damage disconnect power before installation or servicing.
- 3, Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- 4, To prevent product malfunction and/or electrical shock this product must be properly grounded.
- 5, This luminaire is designed to operate in ambient temperatures ranging from -30 °C to 40 °C and to be horizontally mounted with the LEDs facing down.

Ceiling surface mount with J-box

Loosen and remove the screw which used to fix the mounting plate	Fix the mounting plate to the Junction box with the screws	Wiring and Push the pressing plate into the suspension loop on the mounting plate	Lock screw to complete the installation
			

Pendent with 3/4 inch Conduit

- 1, Loosen the screw on side of the light, removing the bracket from Canopy light by pulling it slightly out, just leaving the ring on bracket.
- 2, Connect the wires threaded from conduit and Canopy.
- 3, Screw the Conduit into the hole on top of Canopy light. Installation done.

