



ROUND ULTRA SLIM LED FLUSH MOUNT




Switch between five color temperature modes

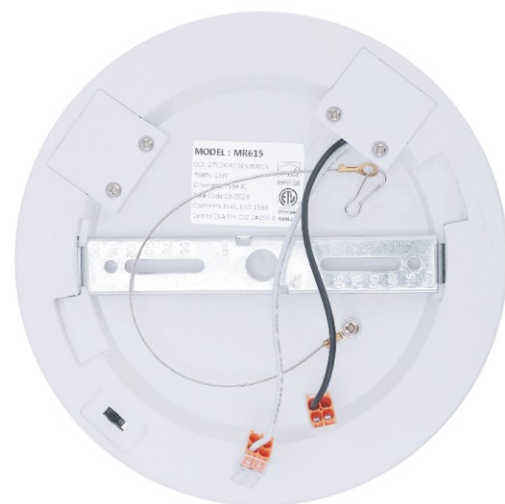


5 CCT With 4 Modes



5-CCT Dip Switch




Wall Switch Control







5%-100% Dimming



Sensor Functions

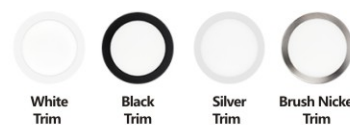

Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
MR06	5 inch	SMD	9	100-130V 100-277V 100-347V	90	120°	Ra80/Ra90	2700-6500	50000	Yes
MR07	7 inch	SMD	12		90	120°	Ra80/Ra90	2700-6500	50000	Yes
MR09	9 inch	SMD	18		90	120°	Ra80/Ra90	2700-6500	50000	Yes
MR12	12 inch	SMD	24		90	120°	Ra80/Ra90	2700-6500	50000	Yes



ULTRA THIN SURFACE MOUNTED LED CEILING LIGHT






Radar Sensor / Infrared Sensor



Switch between five color temperature modes power selectable



Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
MR-180	7 inch	SMD	8/10/12	100-130V 100-277V 100-347V	90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR-218	8 inch	SMD	12/15/18		90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR-300	12 inch	SMD	18/20/24		90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR-380	15 inch	SMD	24/28/32		90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR-480	19 inch	SMD	32/36/40		90	120°	Ra80/Ra90	2700-6000	50000	Yes



SMART EMERGENCY BATTERY BACKUP
SLIM SURFACE MOUNT LIGHT FIXTURE




BATTERY BACKUP




Switch between five
color temperature modes




Guarantees 2 hours operation from battery in case of power outage

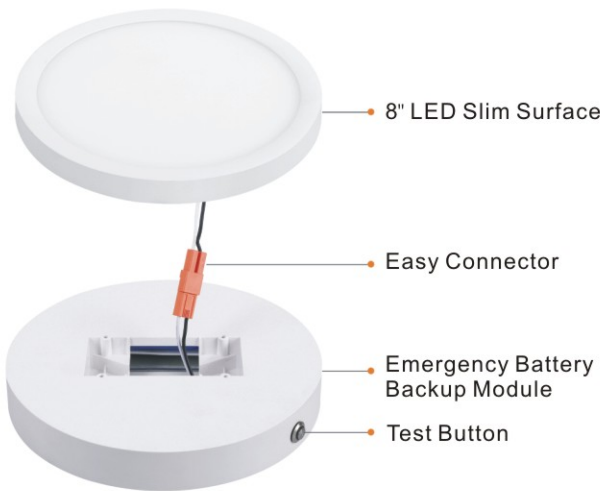

- Trim Finish: White,Black,Brush Nickel.
Chrome (Plastic Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current

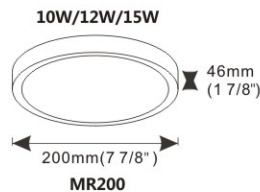


ALUMINUM CEILING LIGHT FOR PROJECT

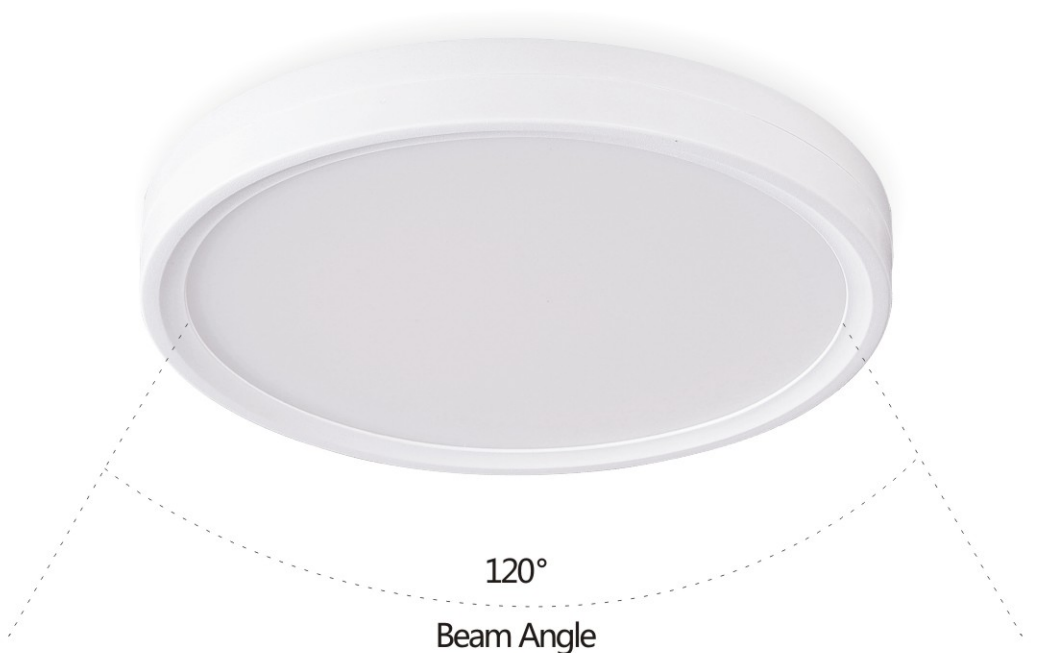

Back-lit



Model	Size	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
MR409	4 inch	SMD	9		90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR615	6 inch	SMD	15	100-130V 100-277V	90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR1024	10 inch	SMD	24	100-347V	90	120°	Ra80/Ra90	2700-6000	50000	Yes
MR1230	12 inch	SMD	30		90	120°	Ra80/Ra90	2700-6000	50000	Yes

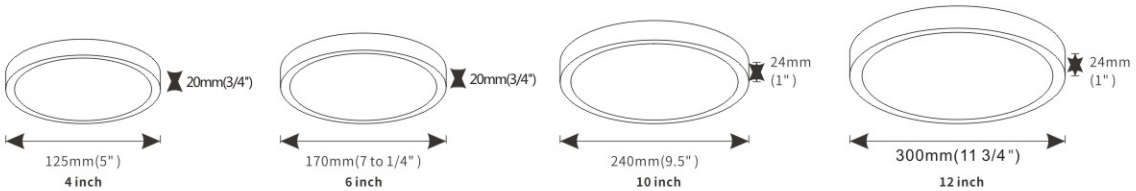

- Trim Finish: White,Black,Brush Nickel.Chrome (Aluminum Body)
- Air Tight & IC Rated
- High Efficiency
- Driver Type: Constant Current





Accessories



Hard Wire Adapter

Hard Wire Adapter to Male Quick Connect Terminal



Mounting Accessories

Mounting Accessories for 4" and 6" Recessed Housings


Junction Boxes



Octagon Steel Junction Box General Type



6" Octagon Steel Junction Boxes


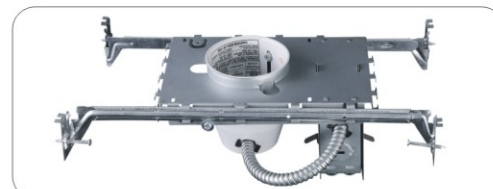


3.5" & 4" Octagon Steel Junction Boxes


ZOOMABLE LED DIMMABLE TRACK LIGHT



Model	LED Chips	Watt(W)	Input Voltage	Lumen Efficacy	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
GD505	COB	13.5W	AC100-277V	1200lm	24°-60°	Ra80/Ra90	2700-6000	50000	Yes

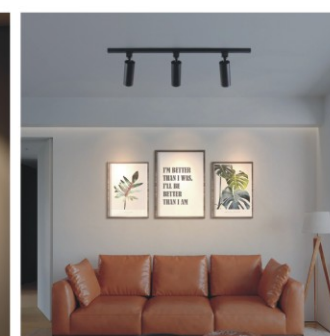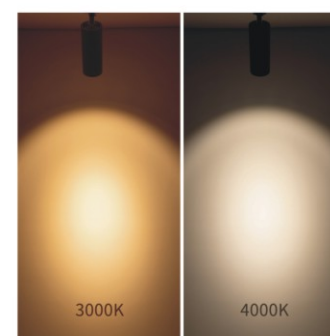

Available Track:
 · Two Wire Track
 · Three Wire Track

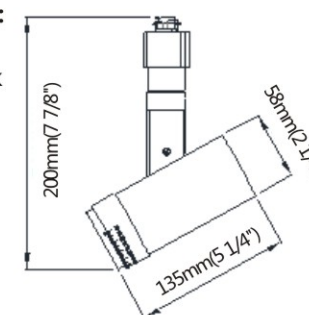

LED Track Light GD501



LED Track Light GD502

90°

350°



350°

90°

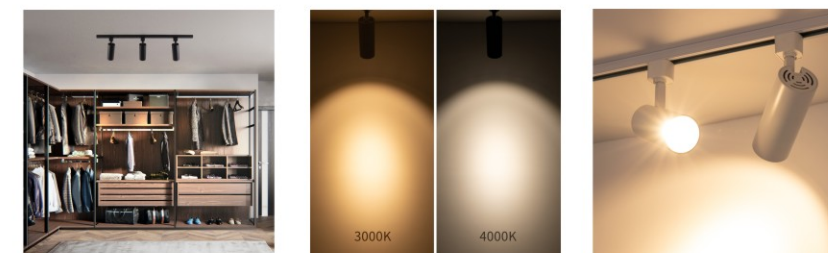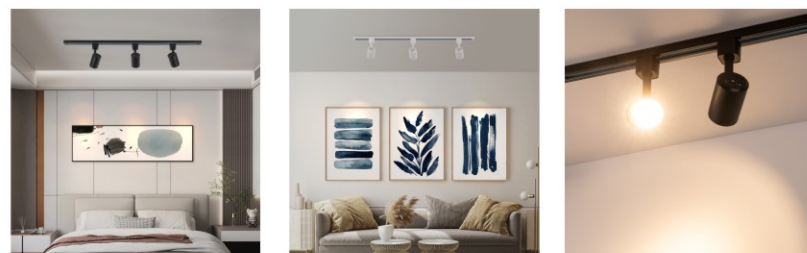

Model	LED Chips	Watt(W)	Input Voltage	Lumen Efficacy	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
GD501	COB	6-7.5W	AC100-120V	> 76lm/w	24°(±3°)	Ra80/Ra90	2700-6000	50000	Yes

Model	LED Chips	Watt(W)	Input Voltage	Lumen Efficacy	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
GD502	COB	16.5W	AC100-120V	1300lm	24°(±3°)	Ra80/Ra90	2700-6000	50000	Yes

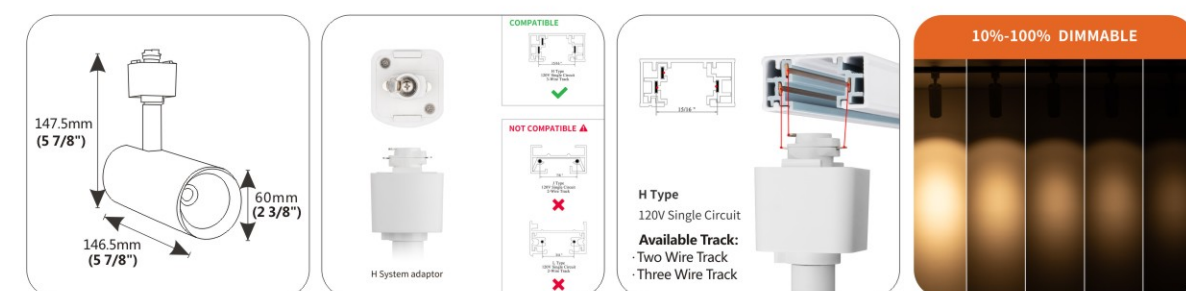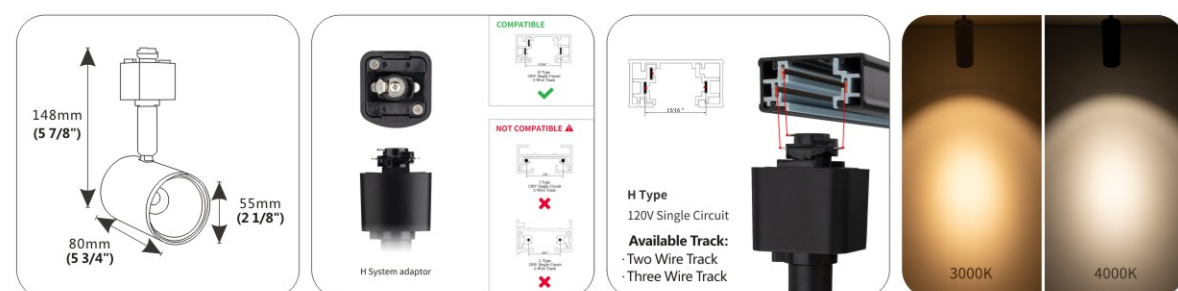




IP65
Waterproof



IP65 Waterproof Pendant & Surface Mounted Ceiling Light

Available in Surface Mounted, Wall Mounted,
Pendant

Suitable for Indoor and Outdoor IP65 Rating
Available to Black, White and Nickel Finishing
Black/White/Sliver/Golden/Nickel Reflector

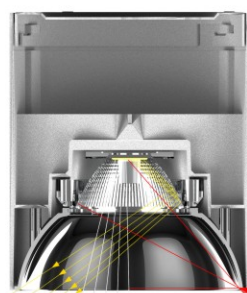

Triple Anti-glare
Waterproof Lens & Dual Optical
Reflector, better Anti-glare



40°
60°



Surface Mounted Ceiling Light G0325



Model	LED Chips	Watt(W)	Input Voltage	Efficacy lm/w	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
G0325	COB	10	100-130V 100-277V 100-347V	90/100	20°/40°/60°	Ra90	2700-6000	50000	Yes
G0325	COB	15		90/100	20°/40°/60°	Ra90	2700-6000	50000	Yes
G0325	COB	15		90/100	20°/40°/60°	Ra90	2700-6000	50000	Yes
G0325	COB	20		90/100	20°/40°/60°	Ra90	2700-6000	50000	Yes
G0325	COB	30		90/100	20°/40°/60°	Ra90	2700-6000	50000	Yes
G0325	COB	40-50		90/100	20°/40°/60°	Ra90	2700-6500	50000	Yes
G0325	COB	50-60		90/100	20°/40°/60°	Ra90	2700-6500	50000	Yes
G0325	COB	60-100		90/100	20°/30°/45°/60°	Ra90	2700-6500	50000	Yes

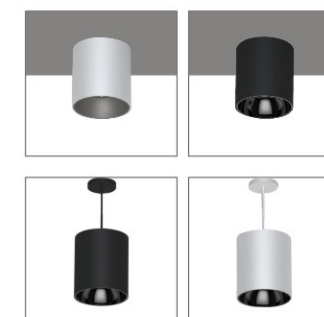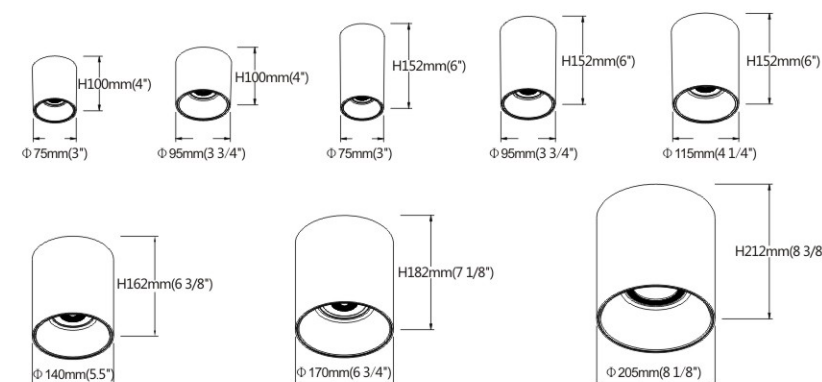

Optical Reflector





Model	LED Chips	Watt(W)	Input Voltage	Lumen Efficacy	Beam Angle	CRI	Color Temp(K)	Lifespan(hrs)	Dimmable
LP-GD503	COB	9W	AC100-277V	> 72lm/w	24°(±3°)	Ra80/Ra90	2700-6000	50000	Yes

