

# MYERS® ME40

## SELLING FEATURES


## COMPETITIVE COMPARISON

**Application: Sump, Dewatering, and Effluent**  
**USP: 4/10 HP Effluent with Cast Iron Enclosed Impeller, Continuous Duty Model Available**

### Top Selling Features:

1. 4/10 HP Motor = Energy Efficient PSC Motor
2. 20' Power Cord = Extra length for Effluent Applications
3. Ball Bearing Design = Longer Pump Life and Better Resistance to Radial Loads
4. Enclosed Impeller = High efficiency pumping applications, no jamming between impeller and volute

### Performance Curve Comparison

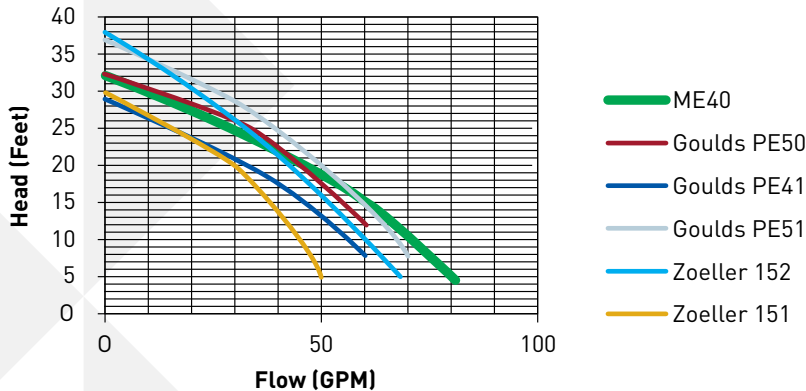

	ME40	VS. Z151/152	VS. PE4/5 EP4	PNR Benefit
HP	4/10 HP	1/3, 4/10	.40/.50	More Flow/HP
Flow @ 10'	70 GPM	45-60	57/46	Higher Flow
Max Flow	80 GPM	68	62	Higher Flow
Motor Housing	Cast Iron	Cast Iron	Cast/Plastic	All Cast Iron
Motor Cover	Plastic	Cast Iron	Cast/Plastic	None
Volute	Plastic	Plastic	Cast/Plastic	Cast Iron Impeller
Switch	Manual or Auto	Manual	Manual	Same
Solids Handling	3/4"	1/2" to 3/4"	1/2" to 3/4"	3/4" on all
Discharge	1-1/2"	1-1/2"	1-1/2"	Same

**\*CONFIDENTIAL: INTERNAL USE ONLY**



293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM  
 PH: 888-987-8677 ORDERS FAX: 800-426-9446

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

© 2012 Pentair Ltd. All Rights Reserved.

M10581SSE (11/27/12)