

FCC SUPPLIER'S DECLARATION OF CONFORMITY

Certificate Number: HTT202404182F

Applicant: NINGBO BOMEI PACKING CO., LTD.

Applicant Address: No.16-20.Beixing Road.Mazhu Town.Yuyao City.Zhejiang Province,China

Manufacturer: NINGBO BOMEI PACKING CO., LTD.

Manufacturer Address: No.16-20.Beixing Road.Mazhu Town.Yuyao City.Zhejiang Province,China

Product Name: Nail Lamp

Model No.: SUN-MATE60,SUN P50,SUN BM-1,SUN BM-2,SUN BM-3,SUN BM-5,SUN BM-6,SUN BM-8, SUN BM-9,SUN-S1,SUN-S5,SUN-S8MAX, SUN-S9, SUN-S9MAX, SUN-MATE50, HAND LIGHT, SUN BM-31, SUN BM-32,SUN BM-35,SUN BM-36,SUN BM-37,SUN BM-38,SUN BM-39, SUN BM-50,SUN NOTE-17,SUN NOTE-18,SUN NOTE-19,SUN NOTE-20,SUN NOTE-21,SUN NOTE-22

Trade Mark: N/A

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2020

The products comply with the FCC regulations and the electromagnetic compatibility evaluation requirements.

The test result has been evaluated by Shenzhen HTT Technology Co., Ltd laboratory and showed in the test report

The test report number: HTT202404182FR

It is understood that each unit marketed is identical to the device as tested, and any changes to the device that could adversely affect the emission characteristics will require retest.

The following responsible party designated in FCC §2.909 is responsible for this declaration:



Authorised Signatory:

Kevin Yang
Kevin Yang/Senior Manager



Date: Apr. 12, 2024



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

FC TEST REPORT

Product: Nail Lamp

Model: SUN-MATE60, SUN P50, SUN BM-1, SUN BM-2, SUN BM-3, SUN BM-5, SUN BM-6, SUN BM-8, SUN BM-9, SUN-S1, SUN-S5, SUN-S8MAX, SUN-S9, SUN-S9MAX, SUN-MATE50, HAND LIGHT, SUN BM-31, SUN BM-32, SUN BM-35, SUN BM-36, SUN BM-37, SUN BM-38, SUN BM-39, SUN BM-50, SUN NOTE-17, SUN NOTE-18, SUN NOTE-19, SUN NOTE-20, SUN NOTE-21, SUN NOTE-22

Report No.: HTT202404182FR

Issued Date: Apr. 12, 2024

Issued for:

NINGBO BOMEI PACKING CO., LTD.

No.16-20.Beixing Road.Mazhu Town.Yuyao City.Zhejiang Province,China

Issued by:

Shenzhen HTT Technology Co., Ltd.

**1F, B Building, Huafeng International Robotics Industrial Park,
Gushu, Xixiang Street, Bao'an District, Shenzhen**

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen HTT Technology Co., Ltd. This document may be altered or revised by Shenzhen HTT Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	3
2 EUT DESCRIPTION	4
3 TEST METHODOLOGY	5
3.1. DECISION OF FINAL TEST MODE	5
3.2. EUT SYSTEM OPERATION	5
4 SETUP OF EQUIPMENT UNDER TEST	6
4.1. DESCRIPTION OF SUPPORT UNITS	6
5 FACILITIES AND ACCREDITATIONS	7
5.1. FACILITIES	7
5.2. MEASUREMENT UNCERTAINTY	7
6 CONDUCTED EMISSION MEASUREMENT	8
6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
6.2. TEST INSTRUMENTS	8
6.3. TEST PROCEDURES	9
6.4. TEST SETUP	10
6.5. TEST RESULTS	10
7 RADIATED EMISSION MEASUREMENT	13
7.1. LIMITS OF RADIATED EMISSION MEASUREMENT	13
7.2. TEST INSTRUMENTS	13
7.3. TEST PROCEDURES	14
7.4. TEST SETUP	16
7.5. TEST RESULTS	16
8 PHOTOGRAPHS OF EUT	19



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

1 TEST RESULT CERTIFICATION

Product: Nail Lamp

Model: SUN-MATE60

Applicant: NINGBO BOMEI PACKING CO., LTD.
No.16-20.Beixing Road.Mazhu Town.Yuyao City.Zhejiang Province,China

Factory: NINGBO BOMEI PACKING CO., LTD.
No.16-20.Beixing Road.Mazhu Town.Yuyao City.Zhejiang Province,China

Trade Mark: N/A

Tested: Apr. 08, 2024 ~ Apr. 12, 2024

EMISSION			
Standard	Item	Result	Remarks
FCC CFR Title 47 Part 15 Subpart B:2020	Conducted (Main Port)	Pass	Meet Class B limit
	Radiated	Pass	Meet Class B limit

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

Deviation from Applicable Standard
None

The above equipment has been tested by Shenzhen HTT Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Jeremy Zhang

Date: Apr. 12, 2024

Check By: Bruce Zhu

Date: Apr. 12, 2024

Approved By: Kevin Yang
(Kevin Yang)



Date: Apr. 12, 2024



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

2 EUT DESCRIPTION

Product	Nail Lamp
Model	SUN-MATE60
Trade Mark	N/A
Applicant	NINGBO BOMEI PACKING CO., LTD.
EUT Type	☒ Engineering Sample. ☐ Product Sample, ☐ Mass Product Sample.
Serial Number	N/A
Power Rating	Input:AC 100-240V , 50/60Hz, Output:DC24V,3A
Data Line	N/A

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
N/A	N/A	N/A

Model list and Models difference

No.	Model Number	Tested With
1	SUN-MATE60	☒
Other models	SUN P50,SUN BM-1,SUN BM-2,SUN BM-3,SUN BM-5, SUN BM-6,SUN BM-8,SUN BM-9,SUN-S1, SUN-S5,SUN-S8MAX,SUN-S9, SUN-S9MAX,SUN-MATE50, HAND LIGHT,SUN BM-31,SUN BM-32,SUN BM-35, SUN BM-36,SUN BM-37,SUN BM-38,SUN BM-39,SUN BM-50, SUN NOTE-17,SUN NOTE-18,SUN NOTE-19,SUN NOTE-20, SUN NOTE-21,SUN NOTE-22	☐
NOTE: SUN-MATE60 is tested model, other models are derivative models, The models are identical in circuit , only different on the model names, size, So the test data of SUN-MATE60 can represent the remaining models.		



3 TEST METHODOLOGY

3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode		
Emission	Conducted Emission	Mode: Working
	Radiated Emission	Mode: Working

After the preliminary scan, the following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Mode: Working
	Radiated Emission	Mode: Working

Then, the EUT configuration and cable configuration of the above highest emission mode was chosen for all final test items.

3.2. EUT SYSTEM OPERATION

1. Set up EUT with the relative support equipments.
2. Make sure the EUT worked normally during the test.



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

4 SETUP OF EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at HTT

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	150kHz~30MHz		+/- 3.59dB
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

6 CONDUCTED EMISSION MEASUREMENT

6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system shall not exceed the level of field strengths specified above.

6.2. TEST INSTRUMENTS

Conducted Emission Shielding Room Test Site 843				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration date
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/09/2023
LISN	AFJ	LS16	16010222119	06/09/2023
LISN	Meestec	AN3016	04/10040	06/09/2023

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).
2. N.C.R = No Calibration Request.



6.3. TEST PROCEDURES

Procedure of Preliminary Test

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test


EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.



6.4. TEST SETUP

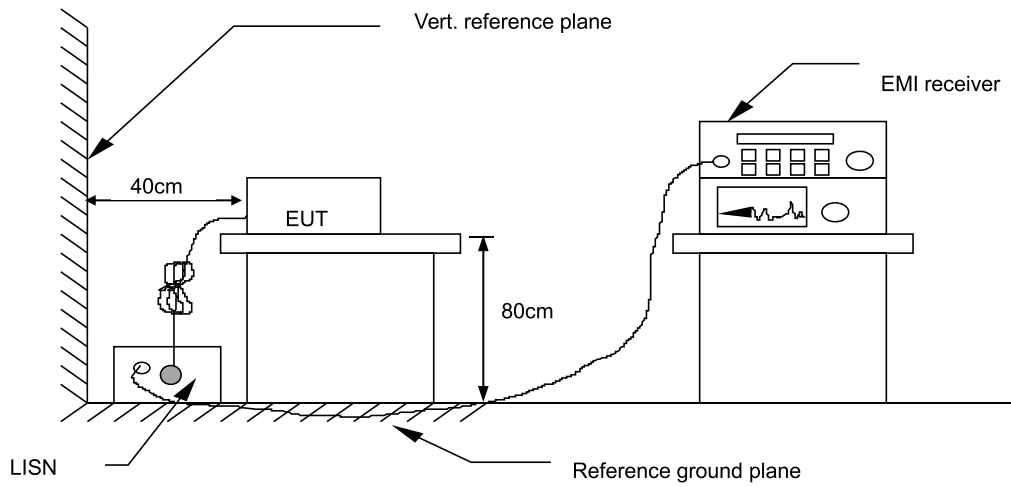


For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

6.5. TEST RESULTS

Pass



Conducted Emission Measurement

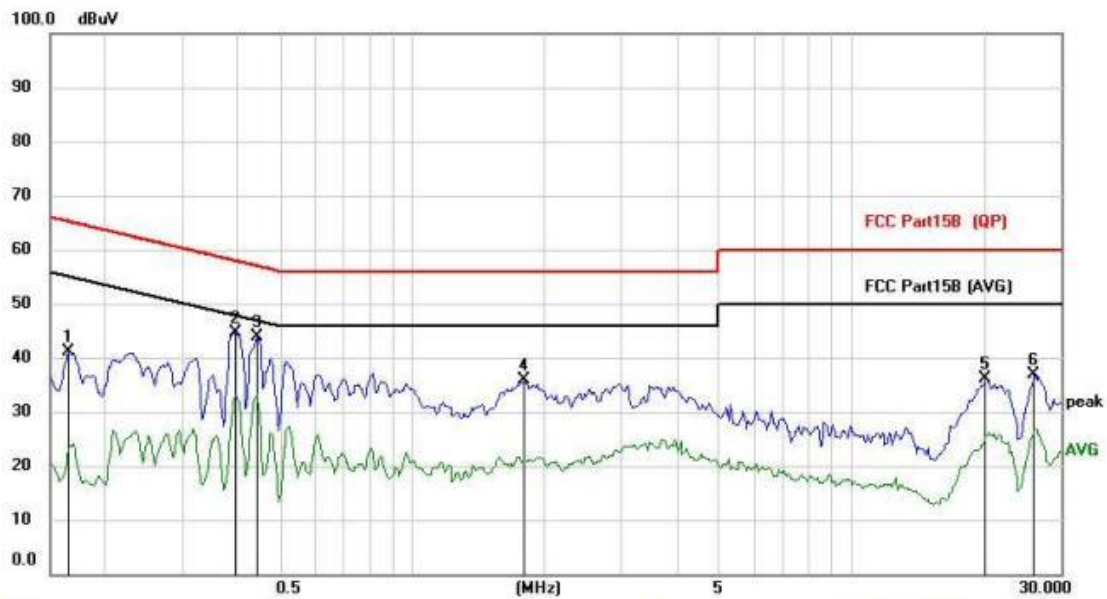

Site LAB

Phase: **N**

Temperature: 26

Limit: FCC Part15B (QP)


Power:

Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1655	30.14	10.92	41.06	65.18	-24.12	peak	
2		0.3957	33.79	10.93	44.72	57.94	-13.22	peak	
3	*	0.4464	32.96	10.92	43.88	56.94	-13.06	peak	
4		1.8075	24.96	10.96	35.92	56.00	-20.08	peak	
5		20.1678	24.35	11.69	36.04	60.00	-23.96	peak	
6		26.0724	24.84	11.93	36.77	60.00	-23.23	peak	



Conducted Emission Measurement

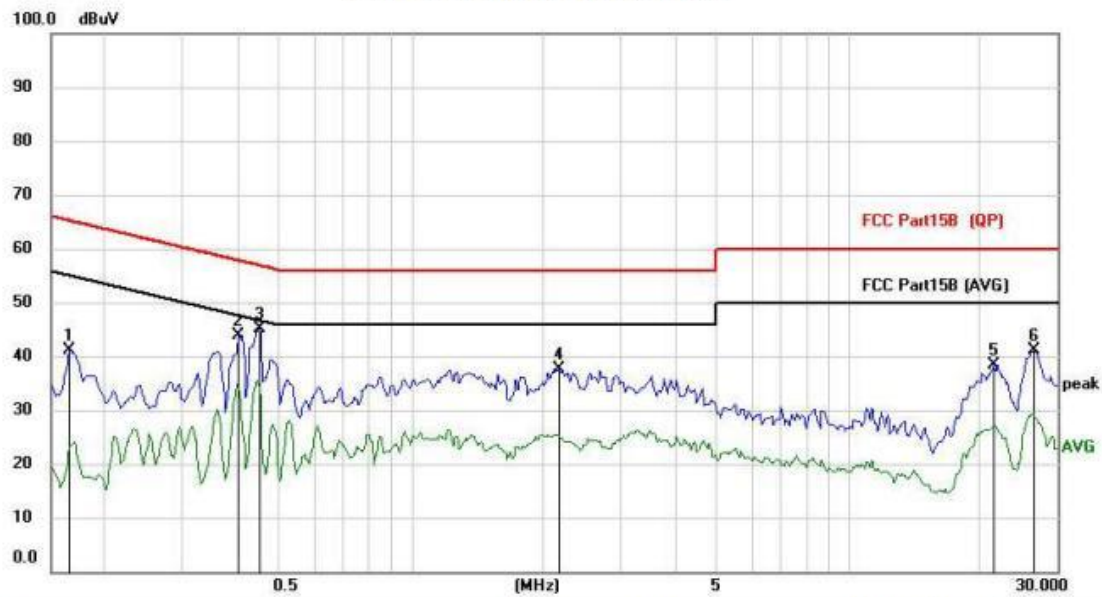

Site LAB

Phase: L1

Temperature: 26

Limit: FCC Part15B (QP)

Power:

Humidity: 60 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1655	30.18	10.92	41.10	65.18	-24.08	peak	
2		0.4035	33.06	10.92	43.98	57.78	-13.80	peak	
3	*	0.4503	34.15	10.92	45.07	56.87	-11.80	peak	
4		2.1741	26.60	10.98	37.58	56.00	-18.42	peak	
5		21.4119	26.70	11.74	38.44	60.00	-21.56	peak	
6		26.4234	29.22	11.95	41.17	60.00	-18.83	peak	



7 RADIATED EMISSION MEASUREMENT

7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	dBuV/m (At 3m)
	Class B
30~88	40.00
88~216	43.50
216~960	46.00
960~1000	54.00

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

7.2. TEST INSTRUMENTS

Radiated Emission Test Site 966				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration date
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	06/09/2023
Spectrum Analyzer	R&S	FSU	100114	06/09/2023
Pre Amplifier	H.P.	HP8447E	2945A02715	06/09/2023
Bilog Antenna	SUNOL Sciences	JB3	A021907	06/09/2023
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	06/09/2023
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

2. N.C.R = No Calibration Request.



7.3. TEST PROCEDURES

Procedure of Preliminary Test

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per ANSI C63.4.

All I/O cables were positioned to simulate typical usage as per ANSI C63.4.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT and worse cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

When measuring emissions above 1GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beam width, the measurement antenna shall be aligned with the EUT.



Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

For the measurement above 1GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

The antenna may have to be higher or lower than the EUT, depending on the EUT's size and mounting height, but the antenna should be restricted to a range of height of from 1m to 4m above the ground or reference ground plane.

If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of the measurements.


using the procedures above to measure with peak detector function, if the result comply with the average limit specified by the appropriate regulation, record the EUT arrangement, mode of operation, and cable positions used for final radiated emission measurement , this can be done with either diagrams or photographs.

Set the detector function of the measuring instrument to average mode, using the procedures above and remeasure only those emissions that complied with the peak limits but exceeded the average limits.

Recorded at least the six highest emissions.



7.4. TEST SETUP

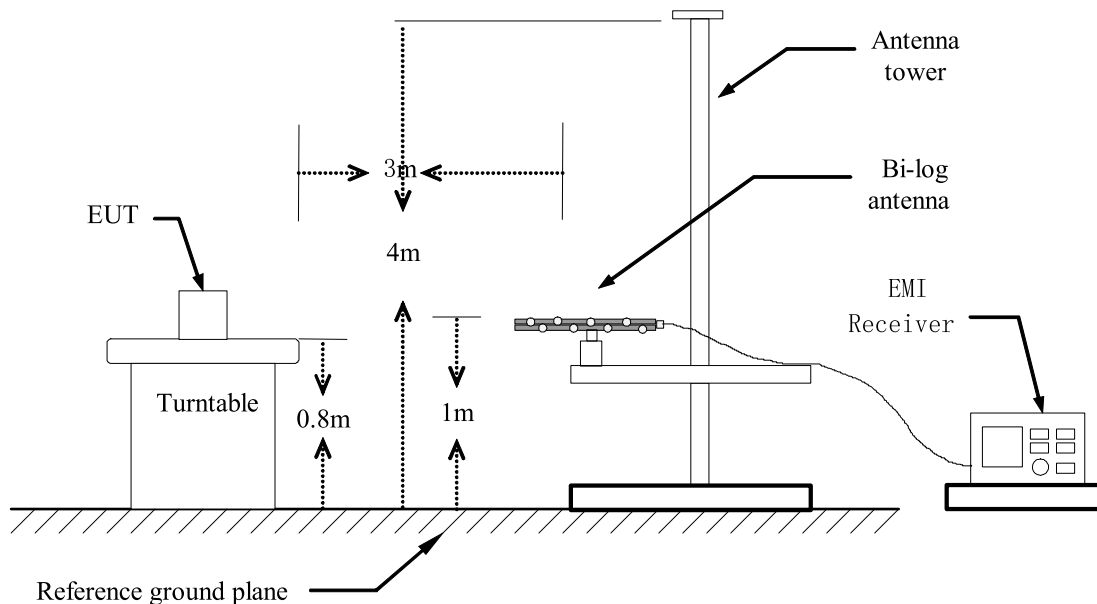

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5. TEST RESULTS

Test Mode	Working	Environmental Conditions	26°C, 55% RH
6dB Bandwidth	120 KHz	Antenna Pole	Vertical / Horizontal
Antenna Distance	3m	Detector Function	Peak / Quasi-peak
Test Result	Pass		

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)



Radiated Emission Measurement



Site LAB

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 B


Power:

Humidity: %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		42.3022	28.55	-10.26	18.29	40.00	-21.71	peak		
2		58.6126	27.23	-11.59	15.64	40.00	-24.36	peak		
3	*	180.6488	43.09	-12.84	30.25	43.50	-13.25	peak		
4		229.2931	43.34	-12.63	30.71	46.00	-15.29	peak		
5		306.7537	40.52	-10.43	30.09	46.00	-15.91	peak		
6		975.7529	27.05	3.58	30.63	54.00	-23.37	peak		



Radiated Emission Measurement

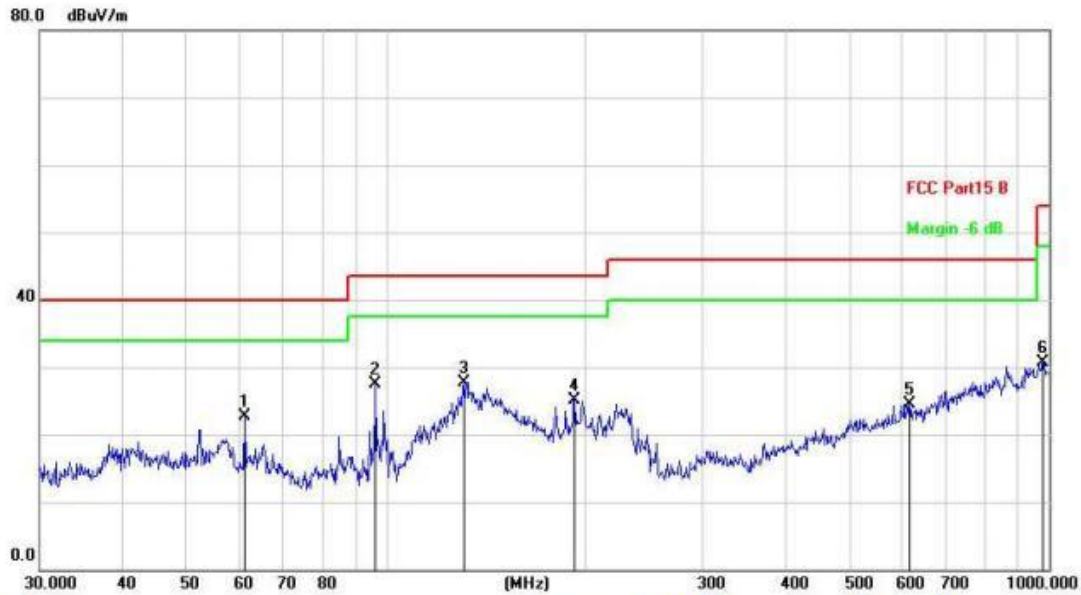

Site LAB

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 B

Power:

Humidity: %


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		61.1316	34.58	-11.81	22.77	40.00	-17.23	peak		
2		96.4362	42.65	-15.14	27.51	43.50	-15.99	peak		
3	*	130.8369	40.11	-12.47	27.64	43.50	-15.86	peak		
4		192.4186	38.55	-13.35	25.20	43.50	-18.30	peak		
5		616.3718	27.71	-3.14	24.57	46.00	-21.43	peak		
6		979.1804	27.16	3.61	30.77	54.00	-23.23	peak		



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

8 PHOTOGRAPHS OF EUT

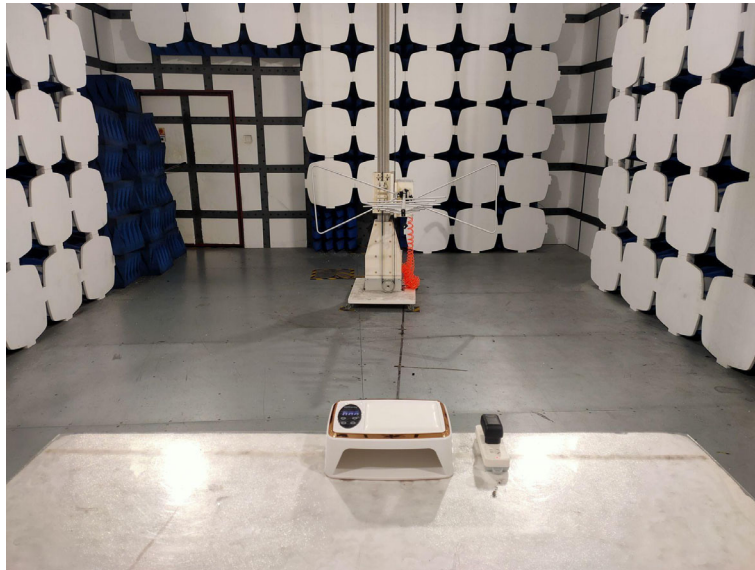



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR





Shenzhen HTT Technology Co., Ltd.



Report No.: HTT202404182FR





Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

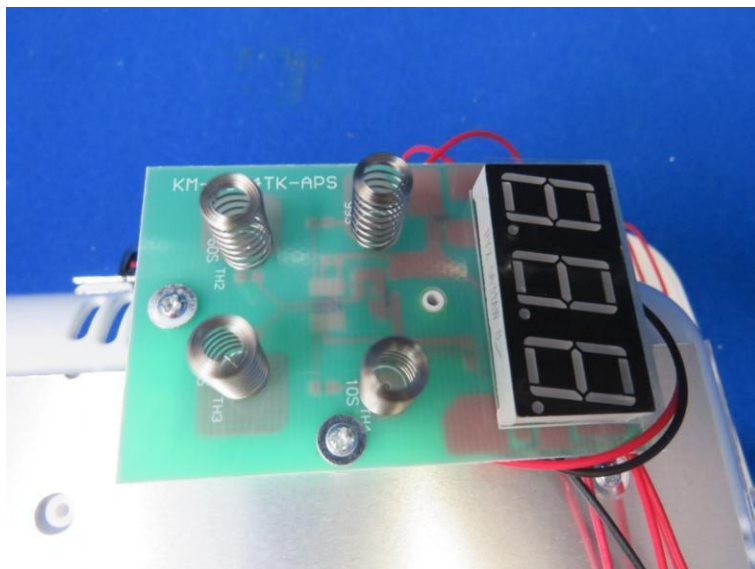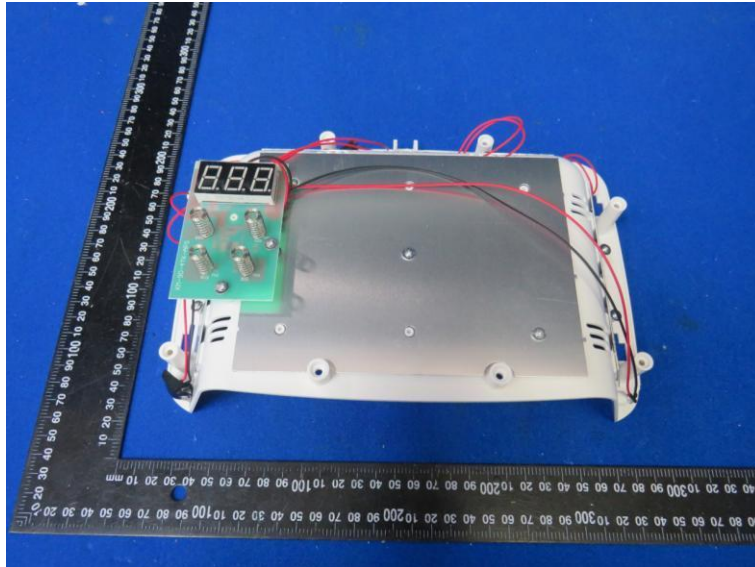



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202404182FR

