


EZFLIP-TOP


JK FLEX HINGE UPGRADE

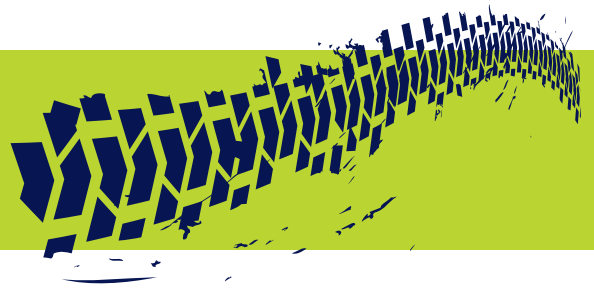

If you haven't installed the EZFlip-Top replace it with the upgraded hinges first. However, if you installed your EZFlip-Top with the full hinge, use this guide to install the upgraded flex hinges.

When installing the EZFlip-Top, maintain a temperature of 70°F and above for at least 48 hours to ensure the adhesive will cure.

WARNING: DO NOT USE POWER TOOLS! DO NOT OVER-TIGHTEN SCREWS!

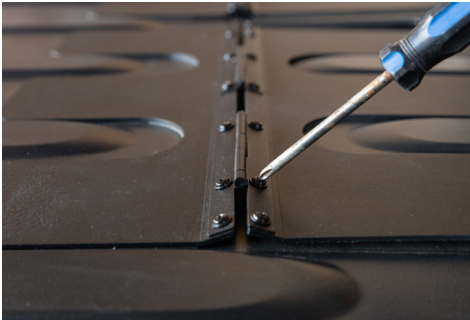

Removal: Use a #2 phillips screwdriver and firmly insert it into the screw head by tapping the top handle of the screwdriver. Then, gently unscrew without stripping the head. Additional screws are supplied if needed.



**SCAN QR CODE
TO GO TO MANUAL INSTALL**

Installation: Position the new hinges over the existing holes. Using the #2 screwdriver, put all the screws in loose, so there is play to adjust the hinge location. Then snug the screws plus an extra 1/8 turn. **Do not over-tighten.**

Please note that the upgraded long hinge is on the inside of the hardtop and short is on the notch end.

Old Single Hinge Style



New Upgraded Flex Hinge



LONGER HINGE ON INSIDE OF HARDTOP SHORTER HINGE

