




# 12 ft x 16 ft x 8 ft Instant Shelter ASSEMBLY MANUAL

#121608-212711

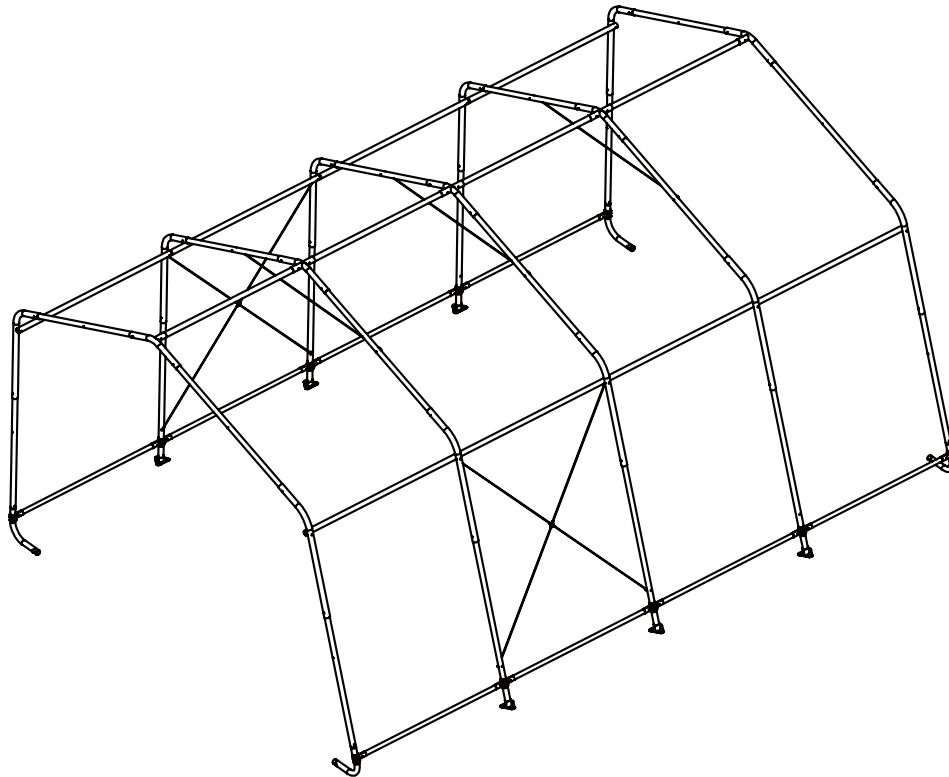

## Parts Alert!

If you have a question or if there are missing parts, please call:

**203-591-9032**

or email [Service@shelterit.com](mailto:Service@shelterit.com)

Monday-Friday 9:00am-5:00pm EST

Missing parts will be sent to you via courier.

Visit [Shelterit.com](http://Shelterit.com) for instructional video

**DO NOT RETURN TO THE STORE!**

Please read instructions fully before beginning assembly!

**Visit [Shelterit.com](http://Shelterit.com) for installation Video**

# TABLE OF CONTENTS

SAFETY CAUTIONS / CLEANING .....	2-3
PARTS LIST .....	4
ASSEMBLY INSTRUCTIONS .....	5-16
LIMITED WARRANTY .....	17

## SAFETY and PRE-ASSMEBLY CAUTIONS

READ PRIOR TO ASSEMBLY!

**DO NOT ASSEMBLE OR DISASSEMBLE THE STRUCTURE ON A WINDY DAY  
ONCE ASSEMBLED, IF HIGH WINDS ARE FORECAST WE RECOMMEND YOU REMOVE  
THE COVER AND STORE IT UNTIL THE WINDY CONDITIONS HAVE PASSED**

1. The cover is made of 3-layer polyethylene. Please do not use open flames and heated elements inside or in close proximity to the product (including all types of stoves, gas heaters, gas lanterns, citronella torches mosquito coils, etc.). The fabric will burn if left in continuous contact with a flame or heat source. Any damage to the cover as a result of using open flames or heating elements will void the Manufacturer's warranty.
2. This is a temporary structure and is not recommended for use as a permanent structure.
3. Choose your shelter's location carefully. Check for overhead utility lines, branches, etc. Do NOT install near roofs or other structures that may shed snow or ice onto the shelter.
4. Inventory all parts before attempting installation.
5. Always wear safety glasses and gloves when assembling or disassembling this product.
6. The shelter must be Installed on a level surface.
7. Anchors must be used with all shelters. When erecting shelters, covers should NOT be installed on any product until it has been properly anchored to the ground. Any shelter that is not anchored securely or properly will blow away. Proper anchoring of the shelter and suitable soil conditions are the responsibility of the customer.
8. Never start gas engines from any vehicle or other machinery within a closed shelter. Special ventilation including an open door should be used at all times for these situations. Any work with paints, cleaning products, etc, may require additional ventilation. When possible always avoid working with such chemicals inside the shelter.
9. Do NOT use barbeque grills, smokers or other flammable equipment under or inside any shelter.
10. Do not cook, smoke, use flammable devices, refuel or store flammable materials in this shelter. Never use or ignite an open flame in the shelter. Open flames must be kept a safe distance away from the shelter.
11. No snow accumulation should be allowed on the shelter. Monitor continuously for accumulated snow on the roof. Snow or ice accumulation may cause your shelter to collapse. This shelter is NOT designed to hold heavy snow or ice loads. Brush snow and ice off the roof top with a broom or mop. Failure to remove snow will void the Manufacturer's warranty.
12. Never clear the roof of snow or debris from inside the shelter. Doing so will increase the risk of collapse, damage to property, personal injury and/or death.
13. Municipal by-laws must be verified prior to setting up this temporary shelter.

## CARE AND CLEANING

1. After assembly, periodically check the anchors, the tension of ratchets, buckles and all hardware to ensure the stability of the shelter. Especially during the first few weeks it will be necessary to tighten the cover and hardware. Always ensure that all covers and hardware are kept tightened.
2. Do NOT apply any "Protect & Shine" type products to the cover or other harsh abrasives including bleach or cleansers. The cover can be easily cleaned with mild soap and water. If storing the cover after cleaning, allow it to fully dry prior to storage.
3. Do NOT use the product for purposes or in an environment for which it is not intended. (e.g. extreme cold, high wind conditions, extreme heat, heavy rainfall, etc.).

**Please note that the Manufacturer has no control over the elements such as wind, heavy snow or rain. The Manufacturer cannot control the location or soil conditions into which the shelter is placed. The Manufacturer, without control of the elements, location or soil conditions, cannot be held responsible for damages caused by the shelter to other items or damages to the shelter itself.**

## ASSEMBLY

*Please read instructions fully before beginning assembly.*

### STEP 1: CHECKING THE PARTS

Unpack and check the contents of the box. Make sure that you have all the parts described in the parts list shown hereafter.



## DO NOT RETURN PRODUCT TO THE STORE

**Missing parts, need replacements, or help with assembly please contact Customer Service:**















**service@shelterit.com • (+1) 203-591-9032**












**Waterbury, CT 06710 U.S.A.**

# PARTS LIST

## #121608-212711

### 12 x 16 x 8

Parts #	Description	Drawings	91216
			5 Ribs
10206	#6 Steel Foot Plate		6
10209	#9 Bend Corner Leg		4
12241	#2 4-way Peak Connector		3
12242	#1 3-way Peak Connector		2
12243	#3 Rafter Pole		10
12244	#4 Side Connector		10
12245	#5 Upright Pole1		4
12247	#7 Upright Pole 2		6
12249	#9 Top Cross Rail		4
122410	#10 Side Cross Rail-s		6
122411	#11 Side Cross Rail		2
122412	#12 Bottom cross rail		8
122420	#15 Steel Rod for middle rib		3
102018	#14 Steel Rod for Win Brace		4

Parts #	Description	Drawings	91216
			5 Ribs
102021	Wire Cable 1'		4
102022	Cable Clamp		4
102023	Removable 15" Auger Anchor		4
102024	4-Way Cover Rail Clamp		12
102025	3-Way Cover Rail Clamp		8
B675	Bolt 3"	M6x75mm	10+1
B645	Bolt 2"	M6x45mm	74+1
N6	Lock nut M6		84+2
M6	Washer	M6	8+1
S620	"S" Hook		4
E635	Eye Bolt with Nut		4
2213724	Front Door Panel (with Zipper)		1
2413724	Back Panel		1
9913721	Roof Cover		1

**Please read instructions fully before beginning assembly!**  
**Visit [Shelterit.com](http://Shelterit.com) for installation Video**

# Assembling the Frame


Visit [Shelterit.com](http://Shelterit.com) for installation Video

Diagram A below represents the completed Frame Assembly once steps 1-4 are completed.


**Note: 2 or more people are required for safe and accurate assembly.**

When assembling the frame **HAND TIGHTEN** the bolts for the cross rails where the squares are shown in **Diagram A**. When putting the cover and doors on, they will need to be temporarily removed and retightened.

# A

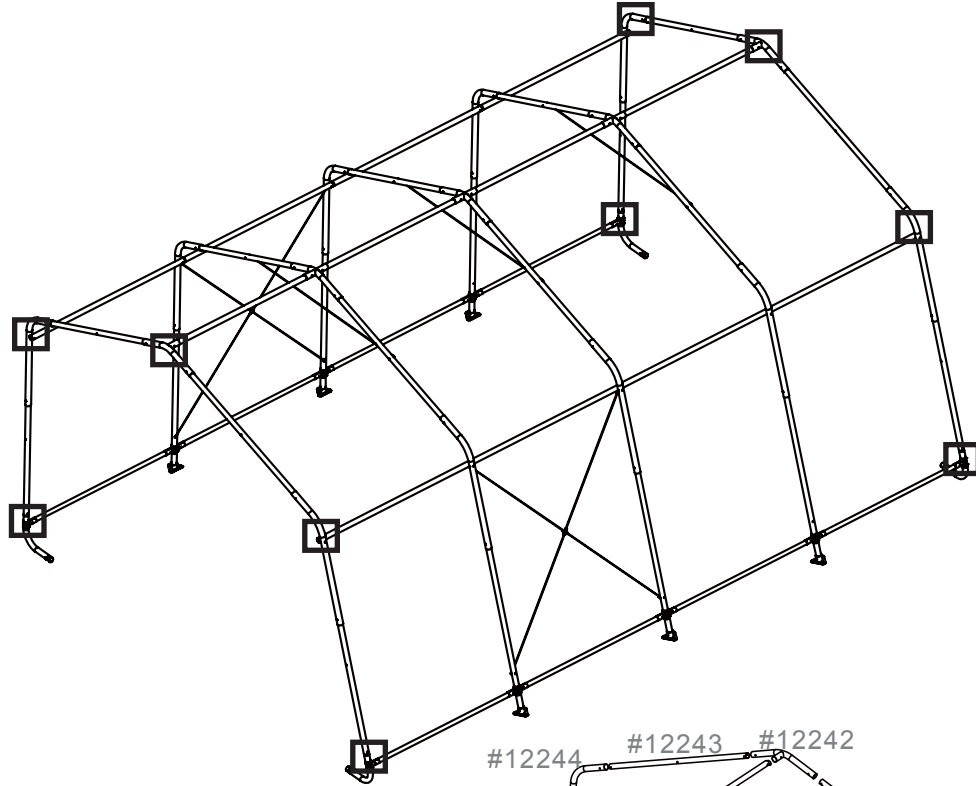

# B

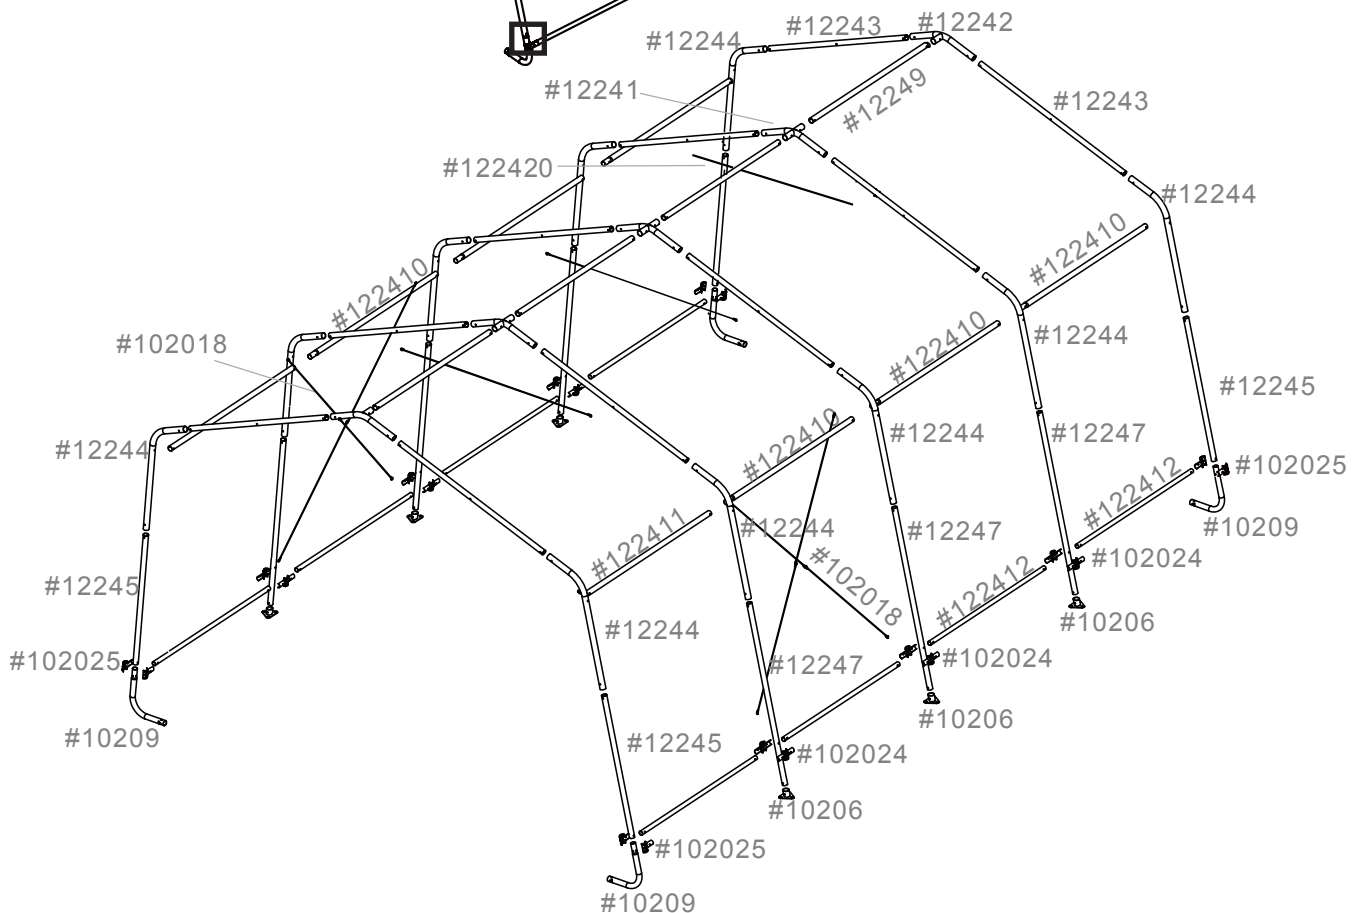

## STEP 1. COLLECT YOUR TOOLS

Tools required to assemble the shelter include:

Safety Glasses – 1 pair per participant

1-Adjustable wrench or box wrench

1-Rubber mallet (to be used to ensure all pipes are fully inserted)

1-Step stool or ladder – shelter is 8' tall

1-Hammer to set bolts

Some of the tubes are manufactured with square dents on one end to act as pressure points so the tubes fit snug


**Assembly Tip:** Using a hammer, tap the bolts to wedge them slightly into the opening. When tightening the self-locking nuts, ensure to draw the bolt heads into the holes of the pipe so that the head of the bolt, when fully tightened, is flush with the pipe. Failure to do so may cause bolts to tear the shelter's cover.

## STEP 2. ASSEMBLING THE ROOF

Layout the roof parts as shown in **Diagram C**. (See **Diagram B** for the part #s)

Connect all parts as shown in **Diagram C** to form the peak of the shelter frame. Use 2" bolts and nuts to assemble the **roof** and the **center truss brace rods** together. Put **truss rod** on the round head side of the bolt when connecting to the frame (see **Diagram F**).

**Install all carriage bolts with nuts facing into the center, inside of the frame to ensure the cover does not tear.**

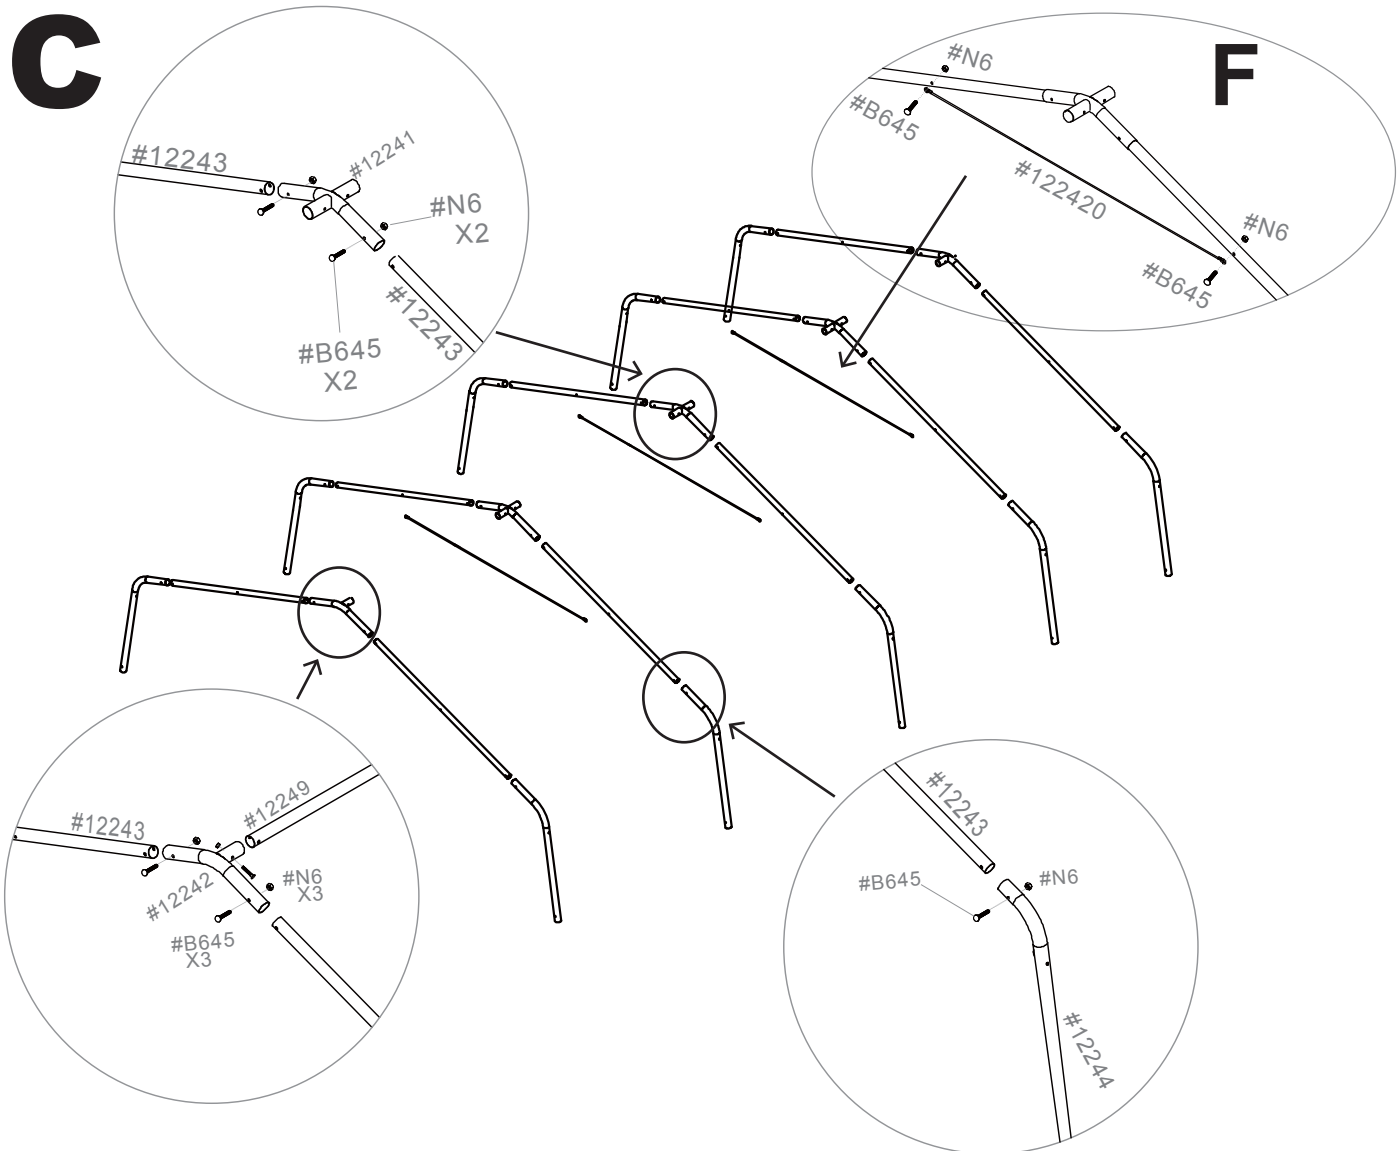

### STEP 3. ASSEMBLING THE CROSS RAILS, CENTER TRUSS BRACES AND SIDE STRUCTURAL "X" BRACES

Layout the roof parts as shown in **Diagram D** (See **Diagram B** for the part #s)

Connect all **cross rails** front to back as shown in **Diagram D**


Use **2"** bolts and nuts to assemble the **top cross rails** for the roof and the **truss brace steel rods**

Use the **3"** bolts to connect the **side cross rails** to the **side bent tubes**

Hand tighten the nuts that are in the **square box locations** (Diagram D) until after the doors are installed and then retighten

Connect the top part of the **X braces** to the inside of the **cross rail**. Use a **3"** bolt, washer and nut to connect the **X braces**, (**Diagram G**)

# D

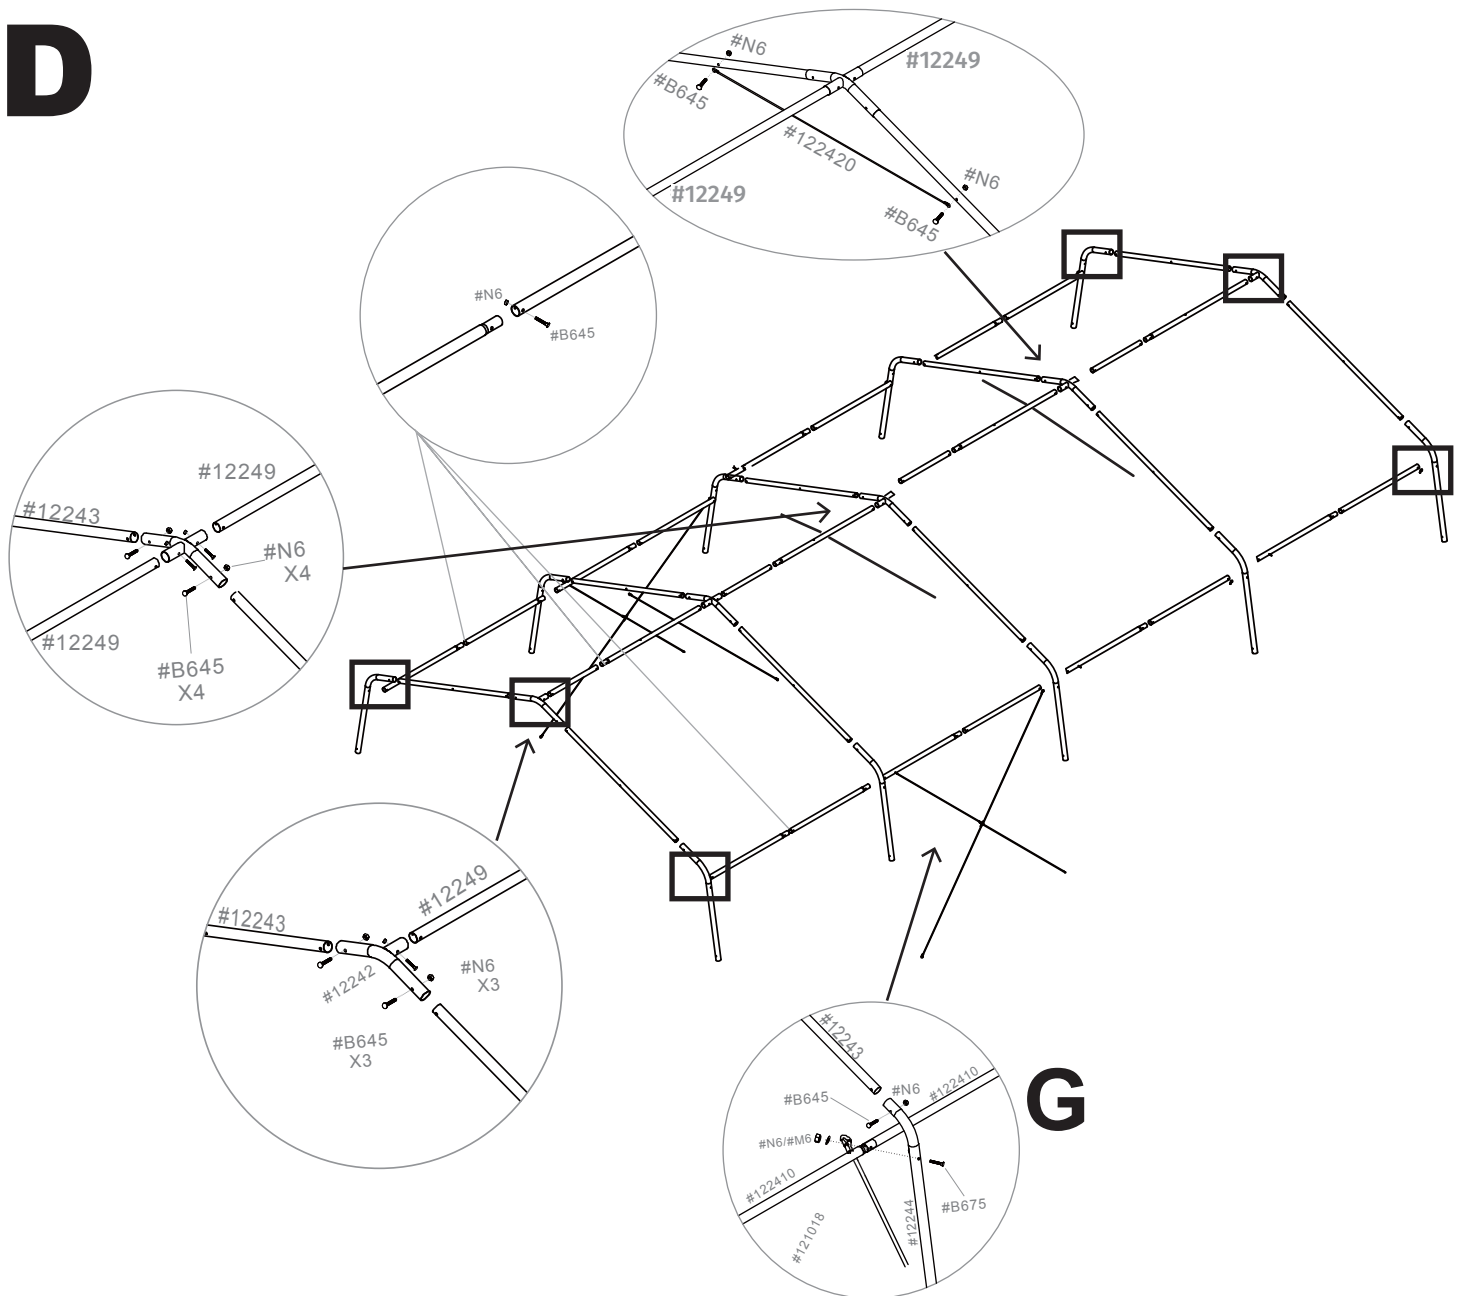


# G

## STEP 4. ATTACHING THE UPRIGHT LEGS

- There are 4 **corner legs** and 6 **middle legs**. Assemble the 4 **corner leg tubes** first. (Diagram H)
- Attaching the **upright legs** - Lift one side of the shelter while the other side remains resting on the ground
- Have your 2" bolts ready**, insert the **corner legs** and **center legs** as shown in (Diagram E, H, L)
- Once the legs are attached, connect the bottom of the **X braces** to the **upright legs** with a 2" bolt and washer (**nuts facing inside**) (Diagram L)
- Connect the **bottom cross rails** and **clamps**, **HAND TIGHT**, to the **uprights**. Repeat the process for the other side of the shelter. See **Diagram E, H, L**
- Once the frame is up, install the **center steel foot plates** to the **middle upright legs**. (Diagram L)  
We recommend installing the temporary anchors, before installing the cover and doors. (Page 16)

# E

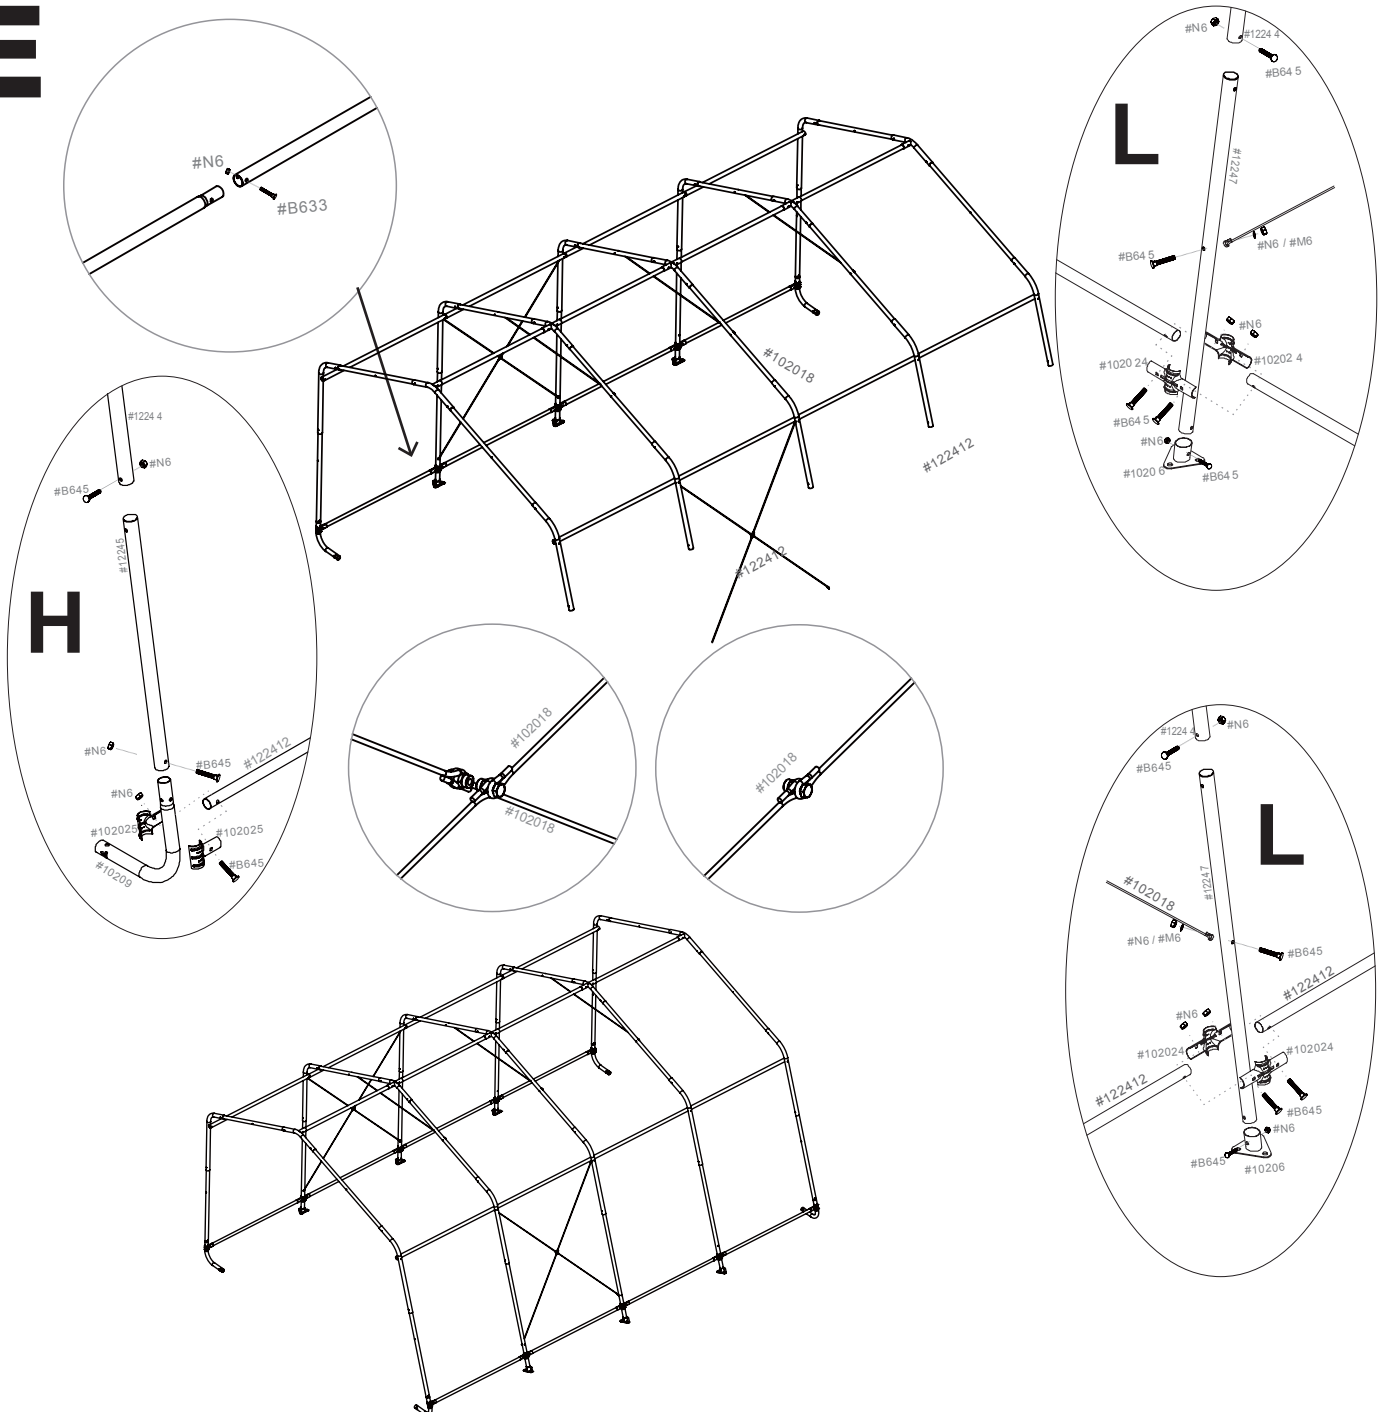





## STEP 5. INSTALLING THE FRONT AND BACK DOOR PANEL (pictures pages 10-12)

Starting from the peak, disconnect the **cross rail** from the **3-way top connector**. Place exposed rope at the top of the panel over the **3-way connector** and under the **cross pole** as shown in **Detail P**.

At each corner remove the **cross rail** and pull the door fabric around to the inside, placing the **3-way connector** through the opening in the fabric as shown in **Detail O**. Reconnect the **cross rails**.

Find the **corner upright** with the holes below the yellow  Sticker.

Insert the S hook with the yellow Label in the hole with the yellow label as in **Detail 17**

On the **bent corner leg** you will see a red label next to the hole. Insert the **eye hook** with the red  label. **Diagram P**. The **eye hook** should be facing the outside of the shelter.

Put the nut and washer on the **eye hook** on the inside of the shelter (sometimes the washer and nut are preinstalled). The open end of the **eye hook** should be facing down. Leave the nut loose or hand tighten enough to hook the **door** and **cover rope** into it. **Detail P and 13**

There is a **large loop** and a **small loop** on the **rope** on each side of the **door panels**. **Detail 13 & 14**

Find the **small loop** on the **door** with the red label and hook it into the **eye hook** with the red label.


**Center the door. Detail 12**

The bottom of the **door** should be just above the **eye hook** and the **bottom corner leg**. **Detail 23**

Take the **rope** on the other side of the **door** that has the **big loop** (you will see 2 red labels on the **door rope** before the **big loop**). Hook the **rope** in the **eye hook** with the red label. **Detail 28**

Hook the **big loop** with the yellow label on the **corner upright S hook** with the yellow label on it.

**Detail 22**



Take the end of the **rope** with the green  label and **ball** and pull up to make the **big loop** with the yellow label smaller. This will tighten the **door** to the **frame**. After making the **door** snug, **Detail 19, 22 & 28**. You can pull all around the **inside corners** of the door to even up the **door** on the **frame**.

The bottom of the **door** should be just above the **eye hook** and above the **bottom corner leg**. This will ensure the door will not rub on the ground. **Detail 23**


Pull up on the **rope** again so the **door** is tight on the **frame** and tie a few knots to secure the **rope**.

Repeat the same for the back panel.


# Visit [Shelterit.com](http://Shelterit.com) for installation Video

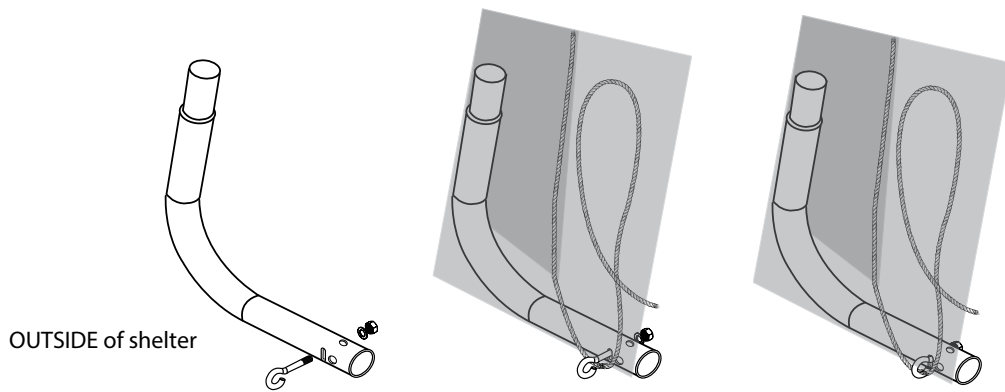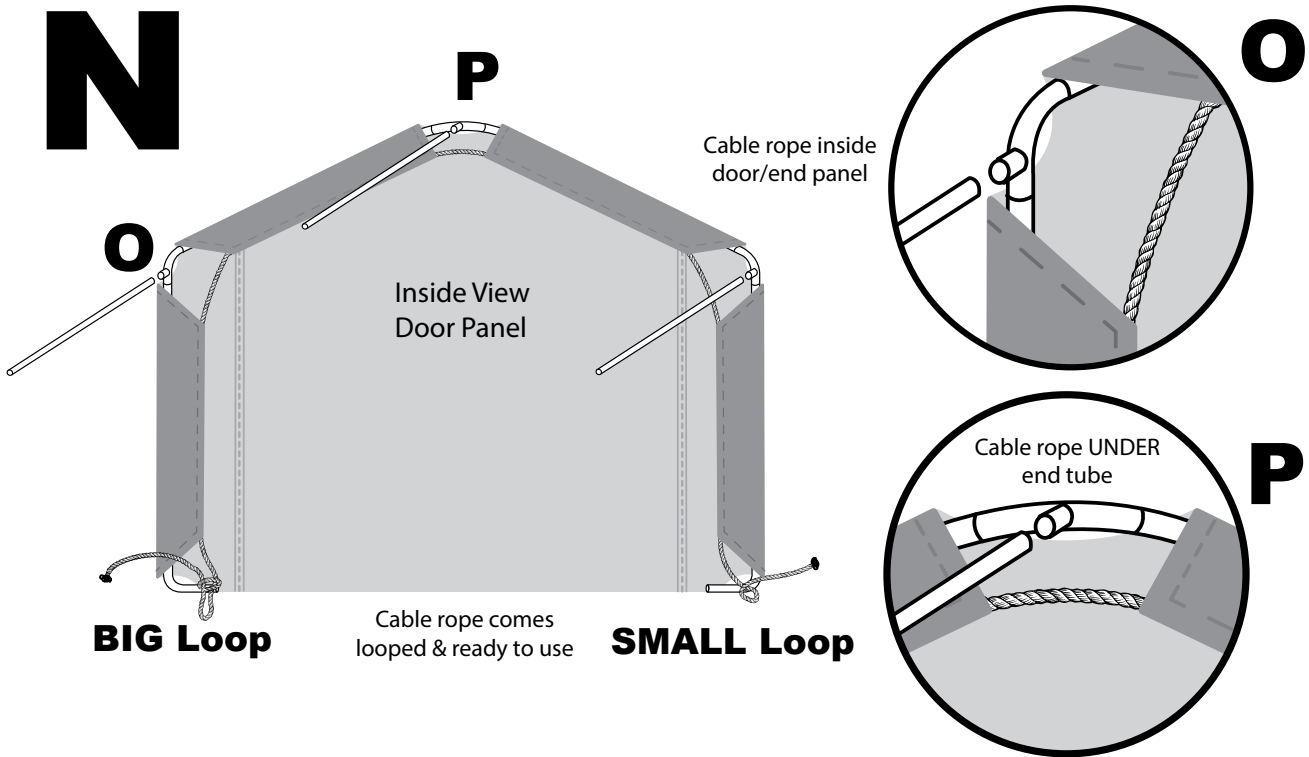


**The CABLE ROPES for the DOOR/END PANEL and COVER will BOTH hook onto the EYE HOOKS**

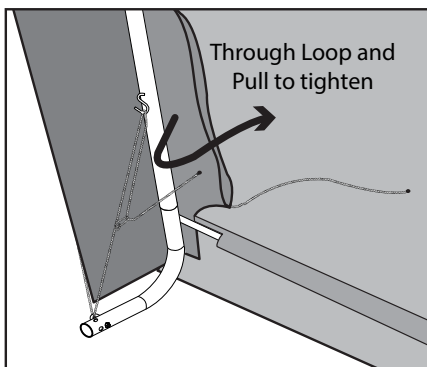





INSIDE of shelter

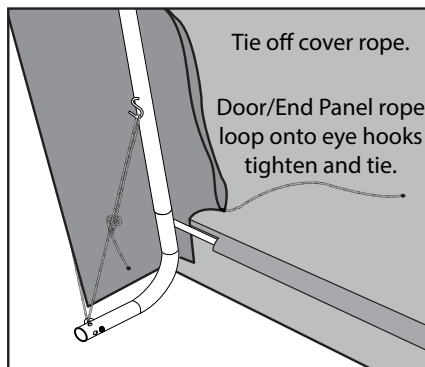


INSIDE of shelter

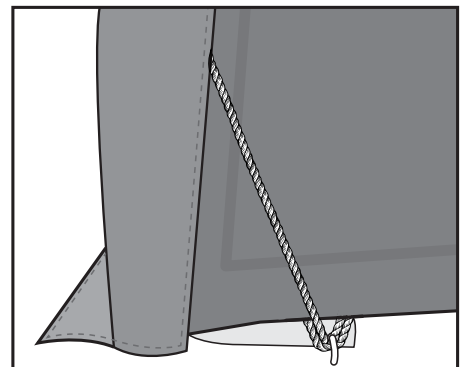

OUTSIDE of shelter

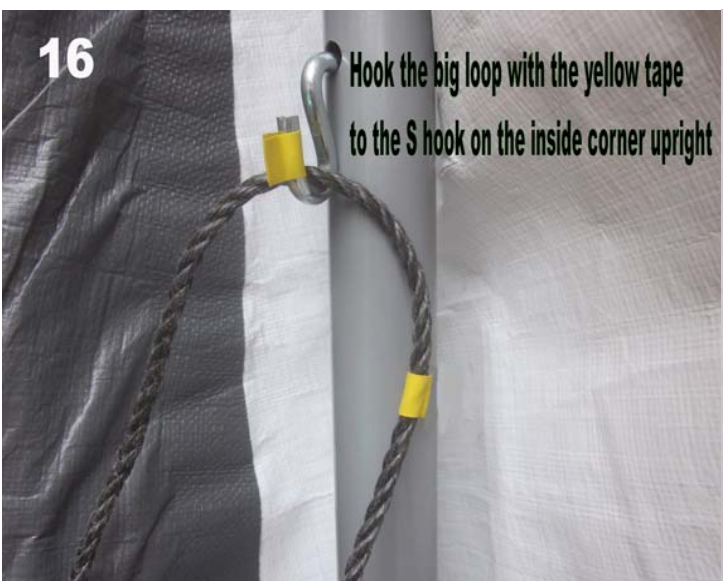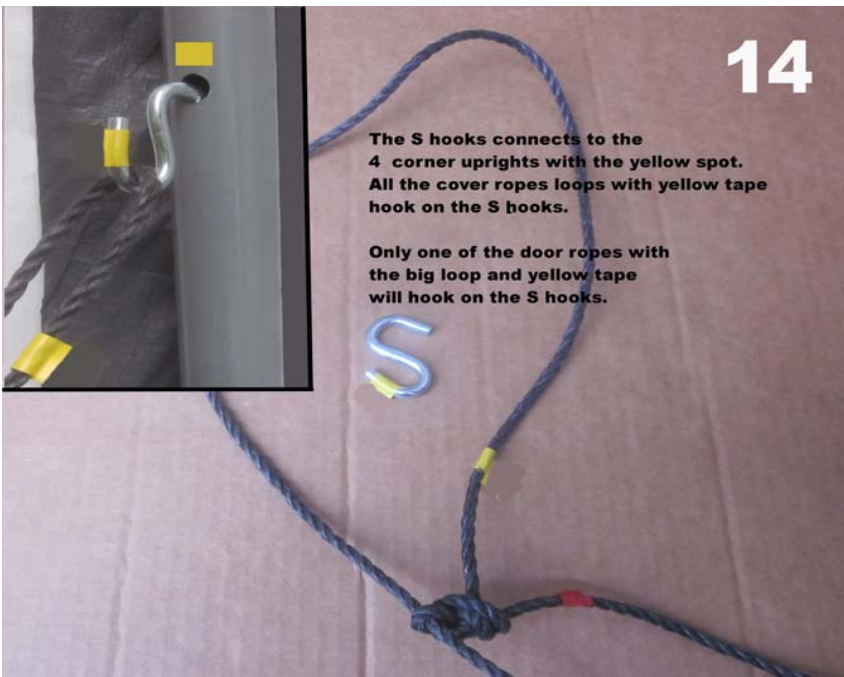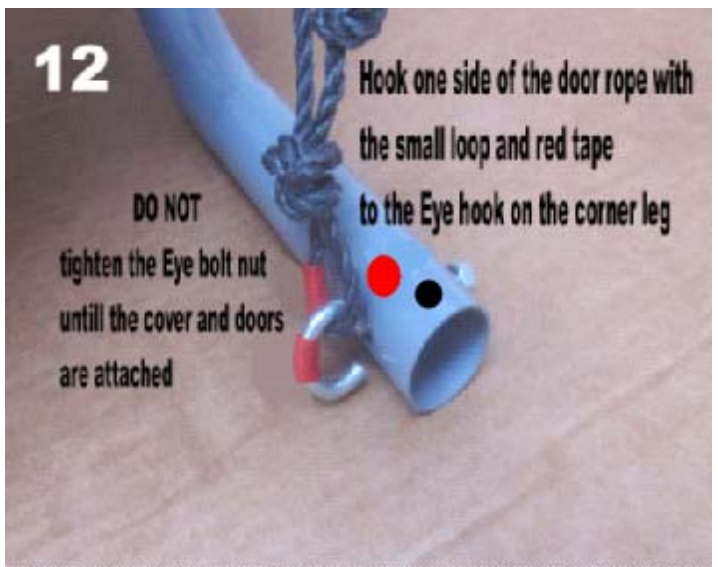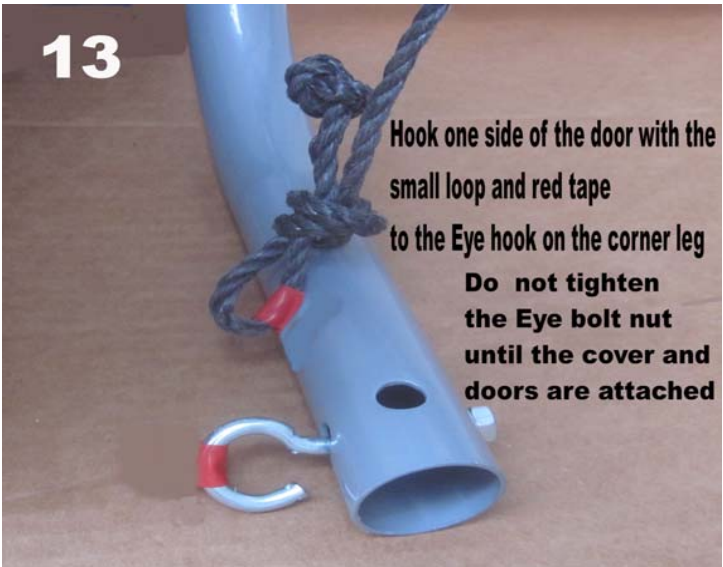





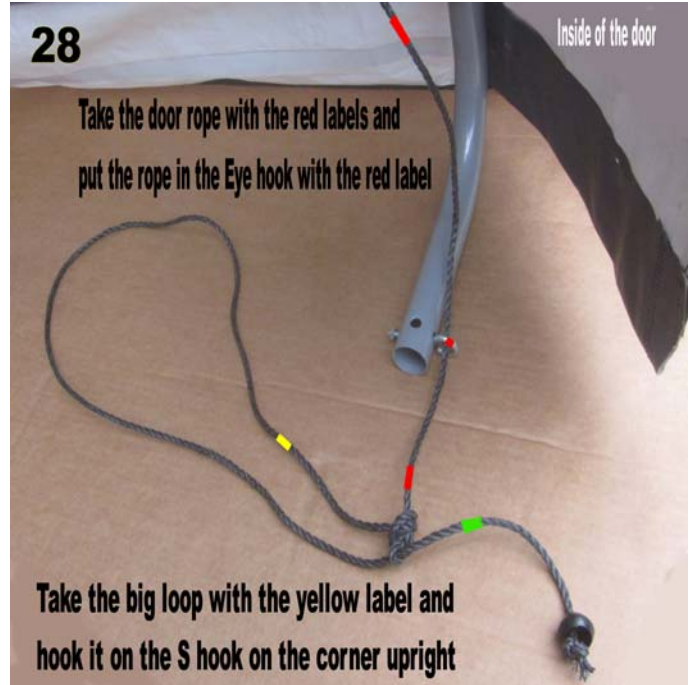

**Visit [Shelterit.com](http://Shelterit.com) for installation Video**

## STEP 6. INSTALLING THE COVER

**Installation Tip;** Visually check all pipes of the frame to ensure they are fully inserted into the next pipe before installing cover. Pipes may separate during installation of end covers and prevent proper installation of the main cover.

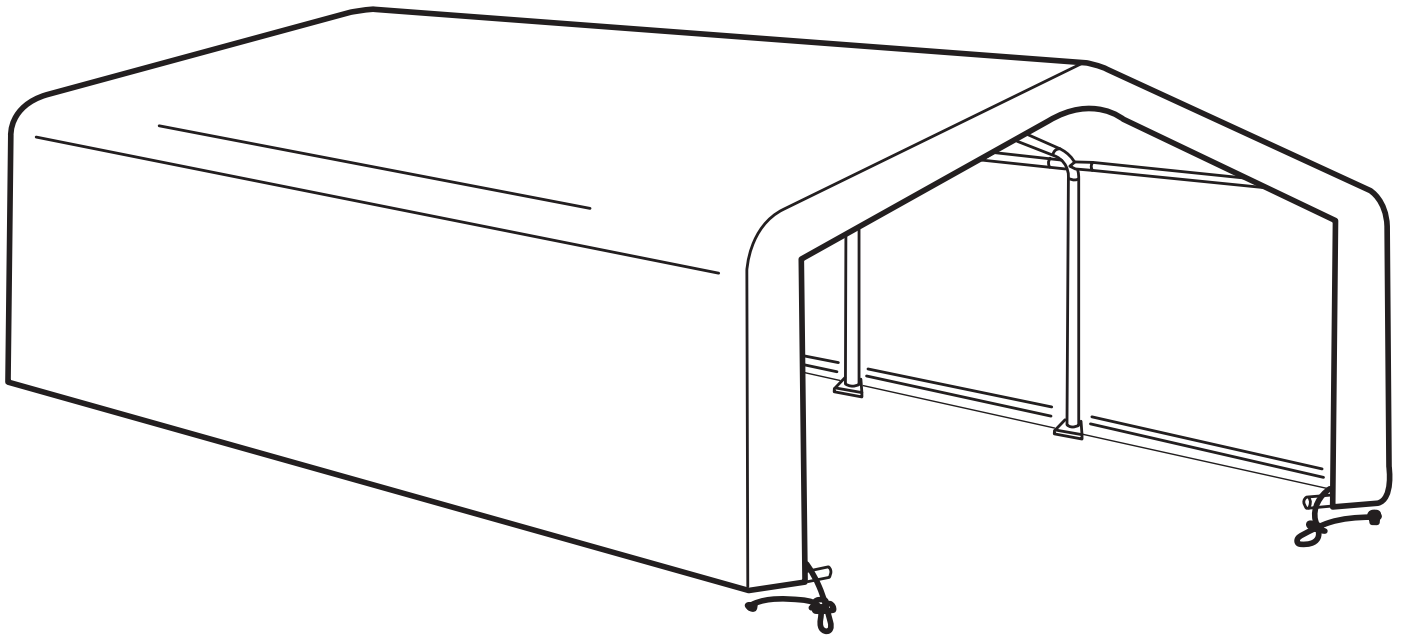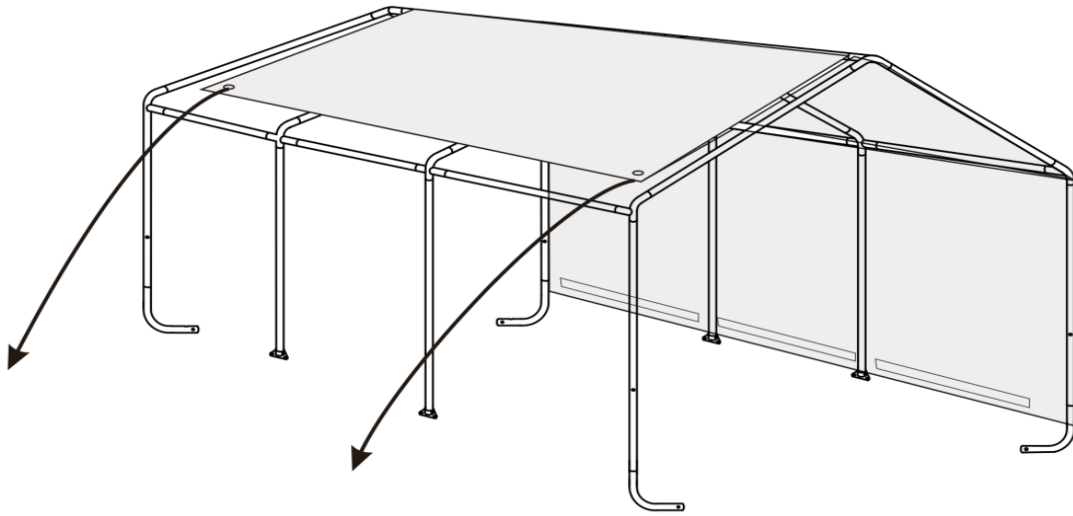

Two people, each positioned approximately one-third into the center of the cover, carefully pull the cover over the frame.

When reaching the peak, use a step stool or ladder to pass over this height.

Pull the cover over the frame **so the rope in the pocket** is in the front and back of the shelter, not on the side of the shelter.

The 4 corner ropes should be in the 4 corners




When the roof tarp is in position **the empty cross rail pockets should be on the side of the shelter near the ground.**

## STEP 7. INSTALLING LOWER CROSS RAILS INTO THE MAIN COVER

The shelter cover is manufactured with hear-welded pipe pocket sleeves along the lower wall of each side (white color faces inside the shelter).

Disconnect the lower cross rails and clamps and insert the cross rails into the pockets of the cover and reassemble the clamps onto the frame hand tighten. Both sides of the cross rails on the shelter should be approximately equal heights from the ground.

**NOTE:** Be sure all nuts are facing the interior side of the shelter to avoid tearing the cover and

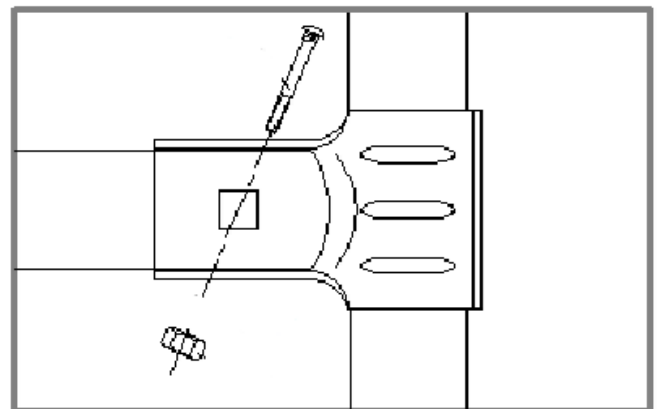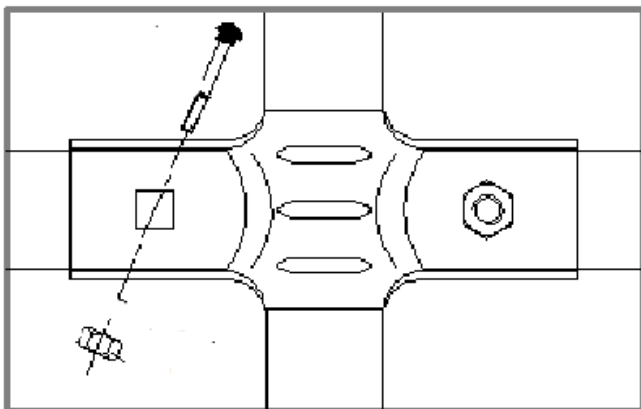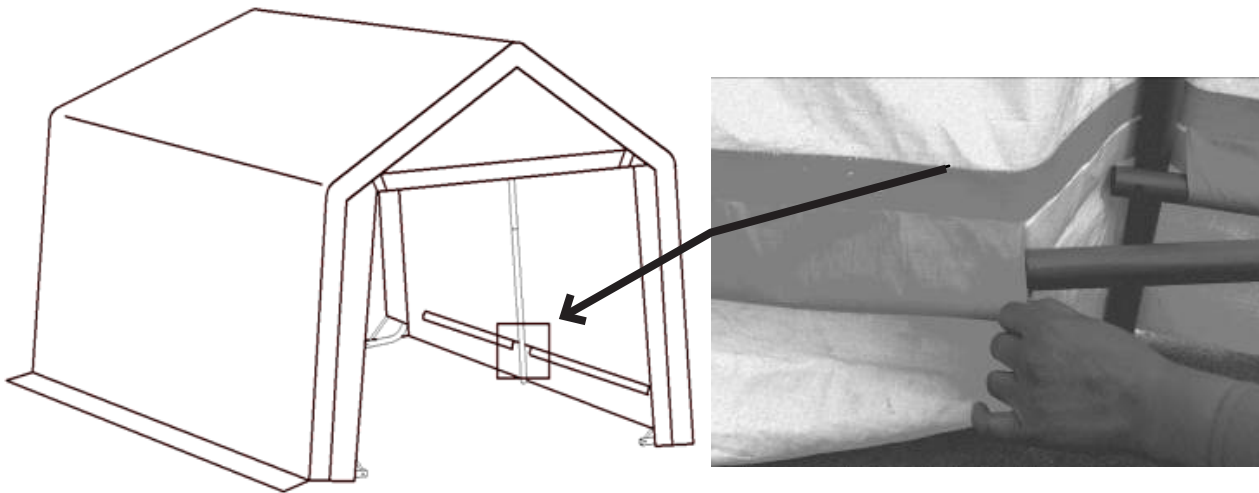

## COVER TENSIONING

Find the ropes coming out of the 4 corners of the cover with the big loops, yellow ■ label

You will see 2 red ■ labels on the rope before the big loop, **Detail 24 & 20**

Hook the cover rope that has the 2 red labels in the same eye hook that you used for the door on the outside of the shelter, **Detail 20**

After hooking the rope to the eye hook with the red label, bring the rope under the door, **Detail 23**

Hook the big loop with the yellow label on the same S hook the door is hooked on

Both door rope and cover rope will be on the same S hook, **Detail 21**

Before pulling the cover tight, even up the cover on all 4 sides

Make sure the side pocket for the cross rails that run front to back on the inside of the shelter are equal to the ground

Take the end of the rope with the green ■ label and ball, and pull up to make up the big loop with the yellow label smaller. This will tighten the cover to the frame, **Detail 19**






Lightly and temporarily tie off the rope with a knot

Walk around the shelter to make sure the cover and door are even

Do a final tightening of the cover to the frame. Firmly pull up so the rope is tight and tie off the rope around the main rope with a few knots, **Detail 19**


After the cover is tightened on the 4 corners with the ropes, push and slide the bottom clamps down that are connected to the side cross rails to snug the sides of the cover to the frame

Tighten the bolts of the cross rail clamps

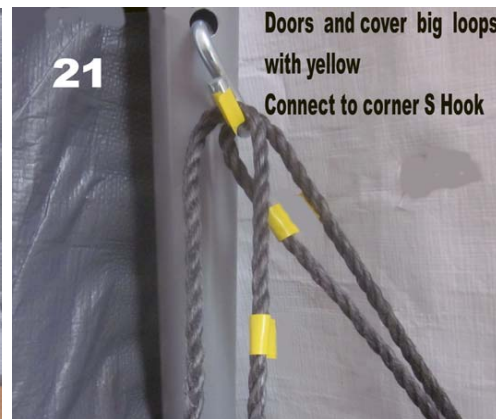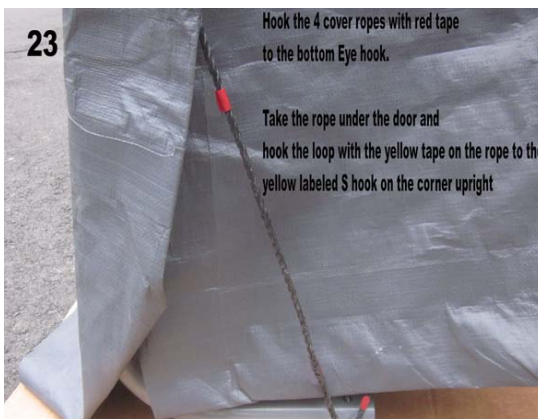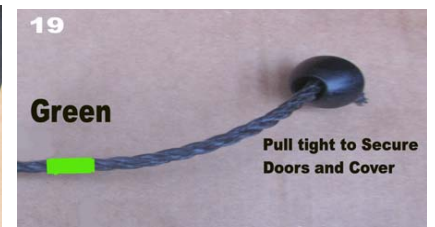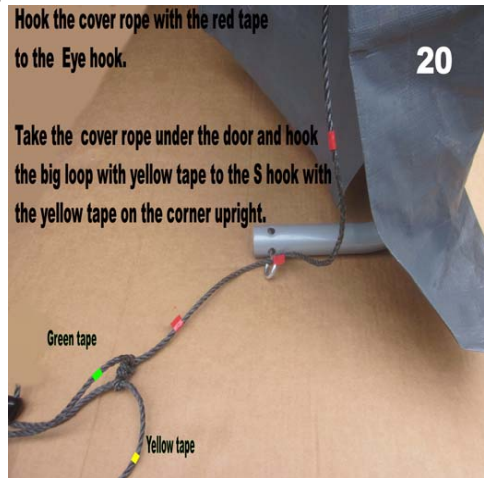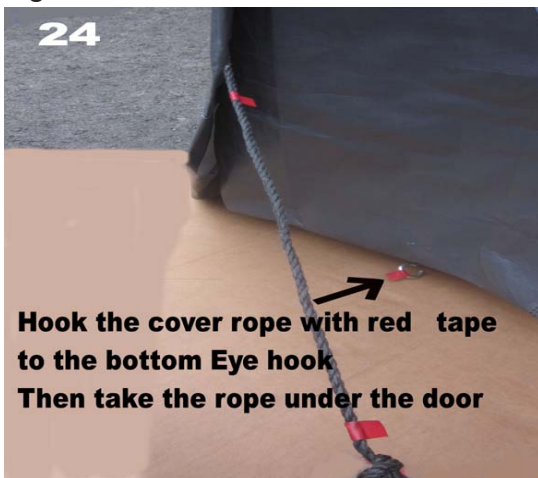


## STEP 8. SQUARE AND ANCHORING THE SHELTER

- a. Ensure the frame is in the final desired location
- b. Check the measurement of 12' wide in the front and back of the shelter
- c. Take a diagonal measurement, cross-corner to cross-corner. When these 2 measurements are equal the shelter is square. If not equal, tap the corner leg of the longer measurement with the rubber mallet, in the direction of the diagonally opposite leg to push (decrease) the length of the distance. Repeat (always taping against the longer measure) until both diagonals are equal
- d. Once equal, check the width measurements again to ensure all are correct

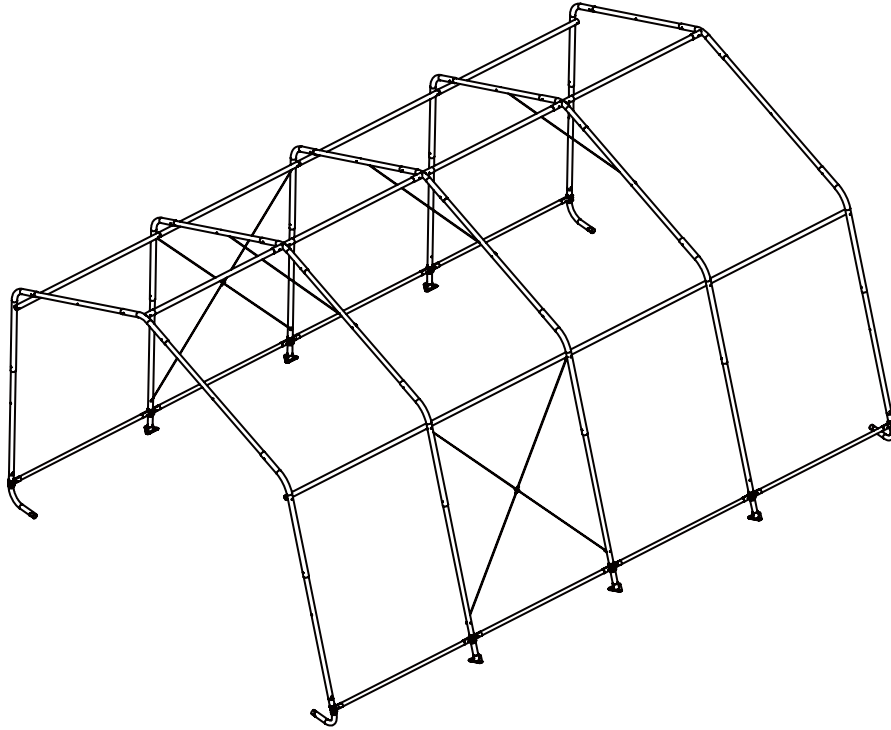

- e. Next, at the curved feet of the shelter install anchors by screwing the temporary removable anchor into the ground and to the inside the shelter
- f. Secure with wire cable and cable clamp, **Diagram M at right**

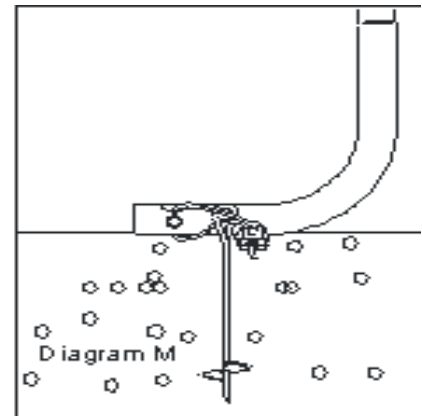

**It is recommended that you buy permanent anchors for the shelter  
Visit [Shelterit.com](http://Shelterit.com) for permanent anchors and replacement parts**

**PLEASE RE-READ ALL WARNINGS CONTAINED ON PAGE 3 OF THESE INSTRUCTIONS.**

**SAVE THESE INSTRUCTIONS FOR FUTURE USE**

To dismantle, execute all instructions in reverse order.

Store your shelter in a cool, dry location between seasons to prolong usable life of all components. Components are not equally durable and will require replacement over time at differing intervals.



## LIMITED WARRANTY

This product is guaranteed for **1 year from the date of original retail purchase** against defects in materials and workmanship.

Subject to the conditions and limitations described below, this product, must be returned with proof of purchase within the stated warranty period and if covered under this warranty, will be replaced (fully or partially with the same model or one of equal value or specification) at the Manufacturer's option. Liability is restricted to repair or replacement only and does not include any related labor costs of installation, dismantling, repair or transportation costs.

### These warranties are subject to the following conditions and limitations:

- a) A bill of sale verifying the purchase and purchase date must be provided.
- b) This warranty will not apply to any product or part thereof which is worn, broken or which has become inoperative due to abuse, misuse, accidental damage, neglect or lack of proper installation, operation or maintenance (as outlined in the applicable owner's manual or operating instructions) or which is being used for industrial, professional, commercial or rental purposes.

---

- c) This warranty will not apply to normal wear and tear or to expendable parts or accessories that may be supplied with the product which are expected to become inoperative or unusable after a reasonable period of use.
- d) This warranty will not apply to routine maintenance and consumable items such as the cover, rope, nuts, bolts, etc.
- e) This warranty will not apply where damage is caused by repairs made or attempted by others (i.e. persons not authorized by the manufacturer).
- f) This warranty will not apply to any product that was sold to the original purchaser as a reconditioned or refurbished product (unless otherwise specified in writing).
- g) This warranty will not apply to any product or part thereof if any part from another manufacturer is installed therein or any repairs or alterations have been made or attempted by unauthorized persons.
- h) This warranty will not apply to normal deterioration of the exterior finish, such as, but not limited to, scratches, dents, paint chips, or to any corrosion or discolouring by heat, cold, abrasive and chemical cleaners.
- i) This warranty will not apply to component parts sold by and identified as the product of another company, which shall be covered under the other product manufacturer's warranty, if any.

### Additional Limitations

This warranty applies only to the original purchaser and may not be transferred. Neither the retailer nor the manufacturer shall be liable for any other expense, loss or damage, including, without limitation, any indirect, incidental, consequential or exemplary damages arising in connection with the sale, use or inability to use this product.

### Notice to Consumer

This warranty gives you specific legal rights, and you may have other rights, which may vary from province to province state to state. The provisions contained in this warranty are not intended to limit, modify, take away from, disclaim or exclude any statutory warranties set forth in any applicable provincial or federal legislation.

## Parts Alert!

If you have a question or if there are missing parts, please call:

**203-591-9032**

or email [Service@shelterit.com](mailto:Service@shelterit.com)

Monday-Friday 9:00am-5:00 p.m. EST

Missing parts will be sent to you via courier.

Visit [ShelterIt.com](http://ShelterIt.com) for instructional video

**DO NOT RETURN TO STORE!**