

3m Close Coupled Toolbar



3m Close Coupled Toolbar




The machine has a depth of 912mm from couple point to the rear link arms on the toolbar, keeping overall length down for manoeuvrability.

The working depth of the front cutting disc is changed manually with the removal of one bolt. You can then select between three different depths.



The close coupled toolbar is lowered in and out of work simply using the three point linkage on the rear of your tractor, using position control you can then set your required working depth of the low disturbance leg. The rear link arms operate via hydraulic operation so that the implement behind can maintain the same working depth even when the toolbar is lifted out of work.

The toolbar is offered in both auto reset and shear bolt legs options and can be fitted with a range of different styles of rear hitch attachments. The most popular ones being on link arms or clevis. We also offer all hydraulic services, free flow return and a 7-pin plug for trailed implements to the rear of the toolbar. ISOBUS and other electrical connections can be fitted if required.

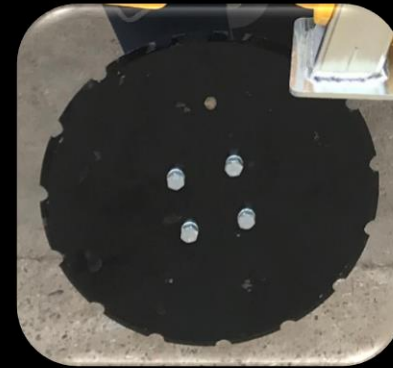

The machine is built with low disturbance legs and points which provide a full width lift with minimal surface disturbance. The front cutting disc enhances the loosening element of the leg and eliminates the surface tension thus reducing any opportunity of soil boiling in front of the leg along with easing the flow of trash through the machine.

