

VPH 4-1500

2.12.2018



KBI Website

Dimensions

- A Width 68"
- B Depth 59"
- C Height 51"

Weight

3,350 lbs

For excavators

29,000 - 46,000 lbs

For loaders

20,000 - 33,000 lbs

Hydraulic Flow

40 gpm

Volume ISO/SAE

1.3 yd³ / 1.45 yd³

Screening area

14 ft²

Number of axles

4

Blade thickness

10 mm

Blade material

Hardox

Blade spacing


25 mm

Chassis material

100% Hardox construction

Working pressure



1,740 - 2320 Psi, max. pressure 3045 Psi

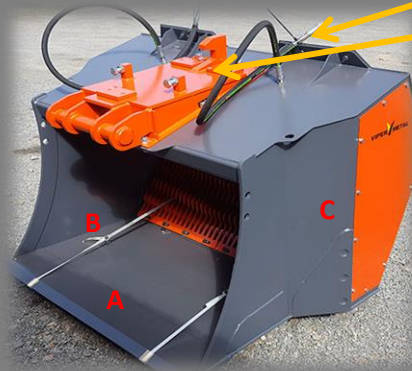

Bolt plate for loader mount
Bolt plate for excavator mount



Plumbed / remote hydraulic located relief valve

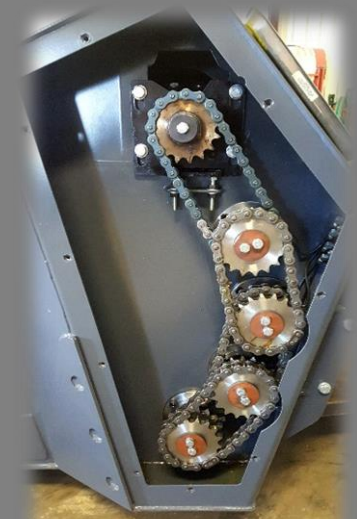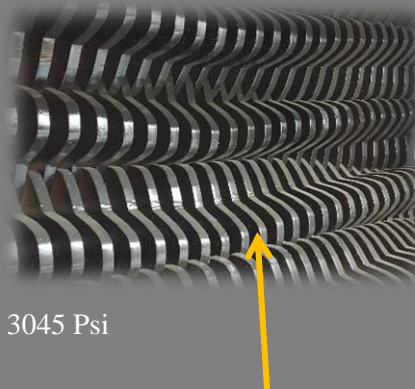

U-Placement of shafts

-The unique center twin spiral blade design move material sideways; to the center of the bucket and to the side of the bucket when rotating clockwise or counterclockwise

* Please note when used with combination machines where back and front attachments are possible the recommended base machine weights can be higher

Main applications

- *topsoil screening / black dirt reclamation
- *producing quality soil and mixed materials
- *pipe back filling
- *screening demolition worksite waste materials
- *foundation back filling
- *asphalt pot hole filling

- *recycling materials
- *composting
- *aerating biomaterials
- *screening stones
- *peat
- *curb & gutter back filling

- Back fill foundation - dig line

- Viper VPH 4-1500 range includes buckets for 35,000 lb excavators and 25,000 lb loaders



Call Ken Burns Inc
(563) 927-2307
kbiwdc@gmail.com

www.KENBURNSINC.com

Ken Burns Inc
Contact Information

WATCH VIDEOS ON OUR WEBSITE