


Basic equipment configuration: Filling machine; Type Eurofüller



Production

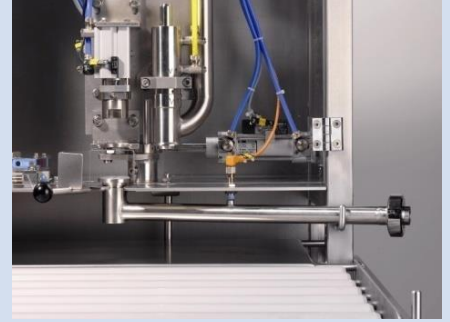

CIP – adapter



(Carton roller conveyor - optional accessory)



Distribution cabinet



Filling chamber



Carton roller conveyor (optional accessory)



IDM



Operating panel



Examples - sealing systems


**Performance:** 3 litre up to 360 bags/hour  
5 litre up to 300 bags/hour  
10 litre up to 240 bags/hour

**Technical Data**


Filling range: 3 ... 20 litres  
Compressed air pressure: 6 bar (Festo-components)  
Voltage/power: 230V (50Hz)/ 16A  
Control voltage: 24V

- Can be used to process nearly all liquids
- Robust stainless steel construction
- High-quality equipment components (Siemens, Festo)
- Good operability


- Pre-settable program modes (CIP, forward running, production, maintenance)
- Maintenance friendly design allowing good accessibility
- The machine conforms to EC Machinery Directive 2006/42/EC

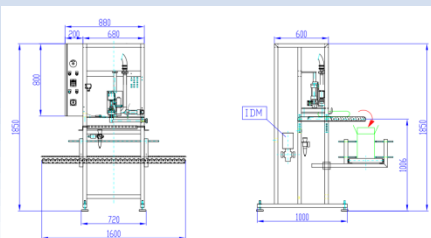

Dimensions L/B/H: 1500/1600/2000

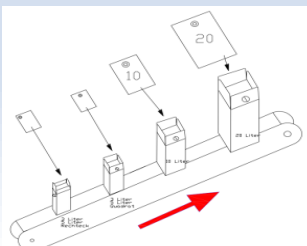

Cartons for 3, 5, 10 und 20 litres

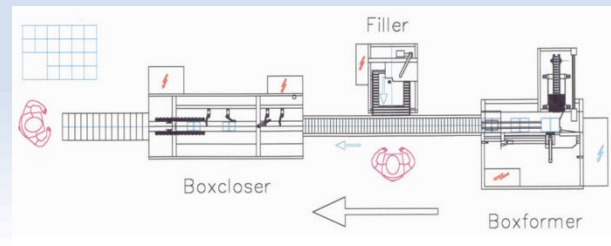

Assembly suggestion with Eurofüller