

PHONE 562-630-5311

Install@DeltaElev.com



Con. Lic 330412 c-11

FAMILY OWNED SINCE 1964


DeltaElevatorSoCal.com

HYDRO-PASSENGER ELEVATORS


COMMON SIZES

Capacity LBS	Shaft		Platform		Clear	Door
	Width	Depth	Width	Depth	Door	Type
1200	6'-2"	5'-0"	5'-0"	4'-0"	3'-0"	2/SP
2150	7'-4"	6'-0"	6'-0"	5'-2"	3'-0"	S/S
2500	8'-4"	6'-0"	7'-0"	5'-2"	3'-6"	S/S
2800*	9'-0"	6'-0"	7'-8"	5'-2"	3'-6"	S/S
3000*	6'-8"	8'-6"	5'-2"	7'-8"	3'-6"	2/SP
3500*	8'-4"	7'-0"	7'-0"	6'-2"	3'-6"	S/S

* =Meets minimum wheel chair & gurney requirements
 For rear door add to shaft depth
 8" for S/S - 12" 2/SP doors

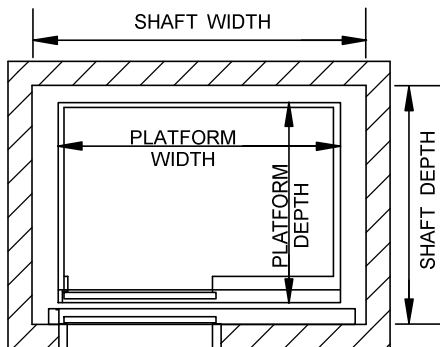


S/S = SINGLE SLIDE DOORS

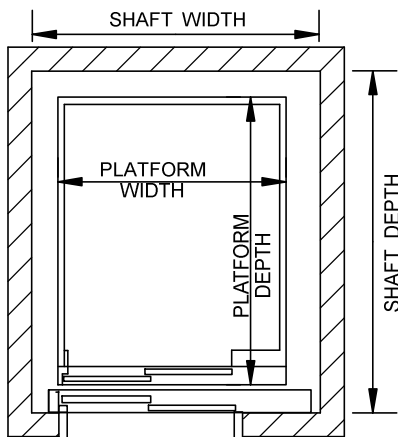

2 / SP = 2 SPEED DOORS


LEFT HAND DOORS SHOWN - RIGHT HAND OPPOSITE

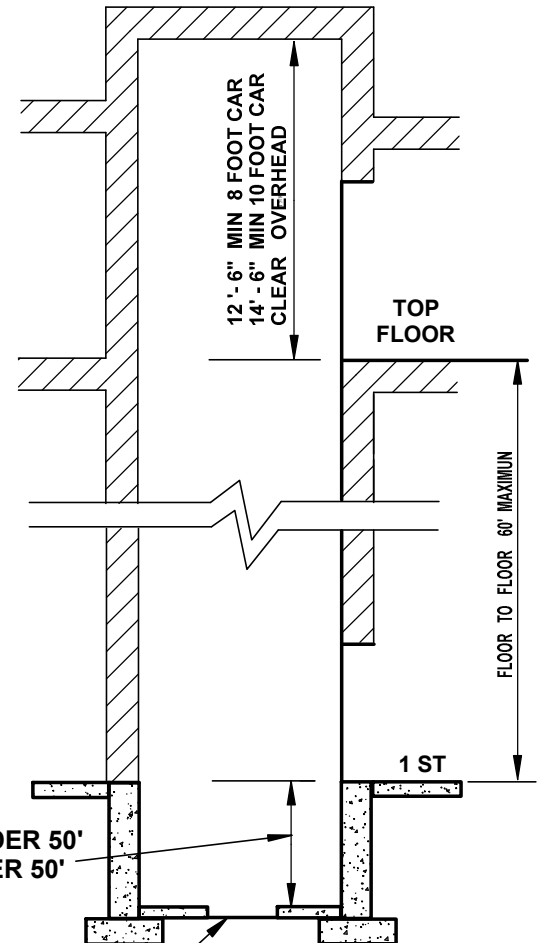

48" PIT TRAVEL UNDER 50'
 60" PIT TRAVEL OVER 50'

36" BY 36" BLOCKOUT
 UNTIL JACK IS SET

MINIMUM MACHINE ROOM SPACE
 6' - 0" BY 6' - 8"
 BY 7' - 0" HIGH
 DOOR MUST SWING OUT

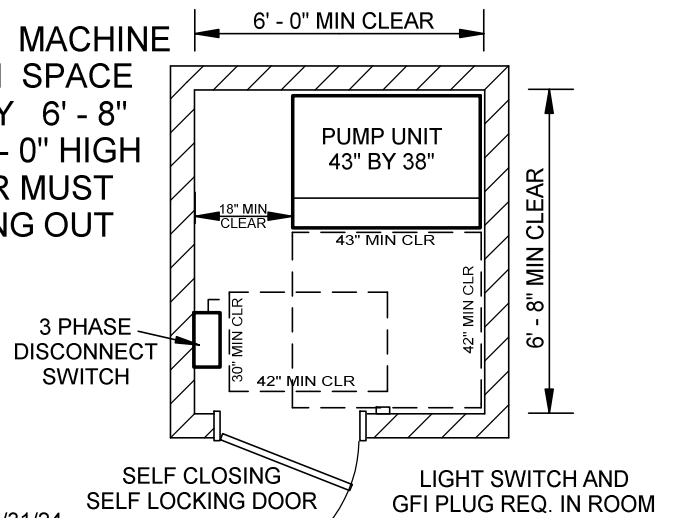

REVISED 12/31/24