


Artus - Fixed Downlight

Description

The Artus Downlight is a premium Fixed downlight at the forefront of design with an elegant slim bezel and high CRI, ideal for Residential, Hospitality, Retail and Marine applications. It is supremely shallow in order to fit all ceiling voids with ease, without compromising lumen output - using premium efficacy LED's with industry leading heat distribution and TIR optics, to achieve your desired beam angle.

When creating the Artus Downlight we considered usability, ease of installation and adaptability to ensure complete versatility for the best results so that different filters, optics, recessing springs and LEDs can be used to enhance performance and fulfil your vision.

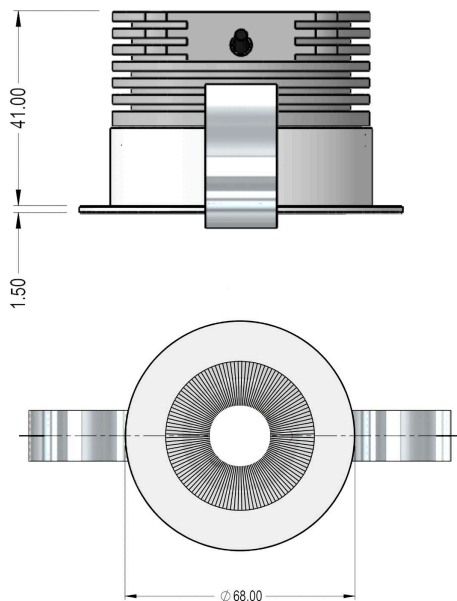

CUT-OUT - 56mmØ

RAL* a variety of Powder coated, Electro Plated and Anodised finishes are available Please contact your Consilio Lighting sales representative for further details.

Key

Due to the incredible amount of versatility that the Artus allows, please use the key below as a guide for the performance.

If Drive Current	CCT	Lumens	Wattage
150mA	2700	580	4.8
	3000	603	
	4000	625	
200mA	2700	771	6.5
	3000	794	
	4000	823	

Build your code

Build your code using the table below using the 'Code Tag'. An example is located under the product photo.

Description	Code Tag	Meaning
Type	ARTF	Artus Downlight
CCT	27 30 40 DW	2700K 3000K 4000K Dim to Warm
Beam Angle	12 20 30 40	12° 20° 30° 40°
IP Rating	54 65	54 65
CRI	97	97
Spring	CC	Constant Curly
Colour Bezel	WH BL SC PC RAL*	White (RAL 9010) Black (RAL 9005) Satin Chrome Polished Chrome Ral/Variant
Colour Baffle	WH BL RAL*	White (RAL 9010) Black (RAL 9005) RAL/Variant

Dim 2 Warm Option

Lumens	CCT Range	Drive Current	Wattage
1000	1800 - 2700K	260mA	11.4