



TubeSpot Mini X2

Spotlight

Description

The TubeSpot Mini X2 is a discreet miniature fixture. Using industry leading high CRI LEDs, ideal for a multitude of different applications. Its miniature main body and heatsink are made from the highest grade aluminium allowing for incredible heat dissipation, creating longer life for your LEDs.

The adjustable knuckle joint allows the product to be tilted 90° and turned 360° so no matter where the TubeSpot Mini is fitted it is sure to reach the areas that you require.


Available with filters, Glass Honeycomb louvres and slash nose tube perfect for finding the exact light and aesthetic required



TubeSpot with Honeycomb Louvre

TSMX2 - 27 - 12 - 20 - 97 - WH - BL - RD

Bespoke lengths for drop standard

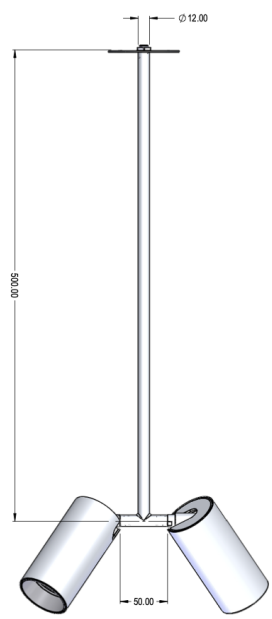

RAL* a variety of Powder coated, Electro Plated and Anodised finishes are available Please contact your Consilio Lighting sales representative for further details.

Key

Due to the incredible amount of versatility that the Diablo allows, please use the key below as a guide for the performance.

| If Drive Current | CCT | Lumens | Wattage |
|------------------|------|--------|---------|
| 260mA | 2700 | 759 | 8.6 |
| | 3000 | 798 | |
| | 4000 | 824 | |
| 350mA | 2700 | 1063 | 11.8 |
| | 3000 | 1114 | |
| | 4000 | 1148 | |

Build your code

Build your code using the table below using the 'Code Tag'. An example is located under the product photos.

| Description | Code Tag | Meaning |
|-----------------|------------------------|--|
| Type | TSMX2 TSMX2 | TubeSpot Mini TubeSpot Mini Slash |
| CCT | 27 30 40 DW | 2700K 3000K 4000K Dim to Warm |
| Beam Angle | 12 20 30 40 | 12° 20° 30° 40° |
| IP Rating | 20 | 20 |
| CRI | 97 | 97 |
| Colour Bezel | WH BL SA RAL* | White (RAL 9010) Black (RAL 9005) Silver Anodised Ral/Variant |
| Colour Baffle | WH BL RAL* | White (RAL 9010) Black (RAL 9005) RAL/Variant |
| Mounting Option | BD RD SC SD | Butterfly Disc Round Disc Shallow Can Small Disc |

Dim to Warm options. Please read below for ratings at 350mA:

| Beam Angle | Colour Range | Wattage | Lumens | CRI (Min) |
|-----------------|--------------|---------|--------|-----------|
| 12° - 24° - 36° | 1800 - 2700 | 13.5 | 1000 | 90 |
| 24° - 36° | 1850 - 3100 | 10.7 | 1330 | 90 |
| 24° - 36° | 1850 - 3100 | 12 | 1520 | 90 |
| 24° - 36° | 1850 - 3100 | 15.8 | 1870 | 90 |