



EEZRV PRODUCTS

EezTire 518SC SYSTEM

WIRELESS TIRE PRESSURE AND
TEMPERATURE MONITORING SYSTEM (TPMS)

Instruction Manual

Model No:51 SC
Handles Up To 26 Wheels



NEW 518 SC system is backward compatible to all previous EEZ RZ TPMS systems.

Please read this manual thoroughly and Keep it with you.


It is your responsibility to understand your system and maintain it.

TABLE OF CONTENTS

SYSTEM COMPONENTS - ANTI-THEFT SENSORS	04
SYSTEM COMPONENTS - FLOW-THROUGH SENSORS	04
MONITOR COMPONENTS & ICONS	05
TPMS MAIN FEATURES	05
Reduce Driving Risks	05
Improve Fuel Economy	05
Prolong Lifetime of Tires	05
SYSTEM OVERVIEW	06
GENERAL INFORMATION	06
PRODUCT FEATURES	07
Monitor Features	07
Sensor Features	08
Repeater/Booster Features(optional part)	08
SYSTEM SETUP	08
START YOUR SET UP HERE	08
Step1 :Setting Your Systems Alarm Parameters	09
Step2:Choosing Pressure and Temperature Unit of Measure	09
Step3:Choosing per Axle High and Low Parameters	10
PROGRAMMING SENSORS TO THE MONITOR	10
Method 1: Tabletop	10
Method 2: Air activation	11
MONITOR DISPLAY IN OPERATING MODE	11
MOTES and RECOMMENDATIONS	11
Factory Defaults	12
RESTORE PARAMETERS to FACTORY DEFAULTS	12
MONITOR INSTALLATION	12
SENSOR INSTALLATION	14
DELETING A SINGLE SENSOR ID	15
DELETING ALL SENSORS ID	15

OTHER FUNCTIONS	16
OUT OF PARAMETER ALERTS	17
Monitor Alerts	17
High-Pressure Alert	17
Low-Pressure Alert	17
High-Temperature Alert	18
Fast Leakage Alert	18
Sensor Low Battery Alert	18
REPLACING ANTI-THEFT SENSOR BATTERY	19
FLOW THROUGH SENSOR BATTERY REPLACEMENT	20
REPEATER/SIGNAL BOOSTER INSTALLATION& PROGRAMMING	21
Recreational Vehicles, Tow Vehicles & Trailers	21
Placement Instructions	21
Installation Instructions	22
Repeater/booster alerts	22
SPECIFICATIONS	23
Monitor	23
Sensors - Anti-Theft	23
Sensors - Flow Through	23
Transceiver (optional parts)	23
TROUBLESHOOTING	24
CAUTIONS	29
LIMITED WARRANTY & GUARANTEE	29
TIRE SENSOR PLACEMENT DIAGRAM	30

SYSTEM COMPONENTS: ANTI-THEFT SENSORS



Monitor



Monitor Holder



Power adaptor



Bracket & Screw

Suction Cup




*Sensors



Sensor Waterproof Rubber Seal (Spare Part)



Wrench



Type-C power cable



BOOSTER (optional)

Item	Q'ty	Item	Q'ty
Monitor	1pc	Bracket & Screw	1pcs/2pcs
Monitor Holder	1pc	*Sensors	Depends on customer request(10~26pcs)
Suction Cup	1pc	Sensor Waterproof Rubber Seal (Spare Part)	Same as sensor
Power adaptor	1pc	Wrench	2pcs
TypeC power cable	1pc	Transceiver	Depends on customer request(optional)

*Sensors quantity depends on customer requirement, maximum can code up to 26sensors.

SYSTEM COMPONENTS: FLOW - THROUGH SENSORS



Monitor



QMonitor Holder Q ♦



Suction Cup




Power adaptor




*Sensors



Sensor Waterproof Rubber Seal (Spare Part)



Hex Wrench



Type-C power cable





Transceiver (optional)

Item	Q'ty	Item	Q'ty
Monitor	1pc	*Sensors	Depends on customer request(10,,26pcs)
Monitor Holder	1pc	Sensor Waterproof Rubber Seal (Spare Part)	Same as sensor
Suction Cup	1pc		
Power adaptor	1pc	Hex Wrench	2pcs
TypeC power cable	1pc	Transceiver	Depends on customer request(optional)

*Sensors Quantity depends on customer requirement, maximum can code up to 26 sensors.

MONITOR COMPONENTS AND ICONS

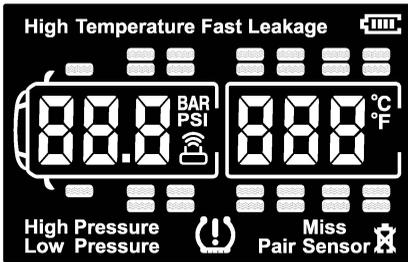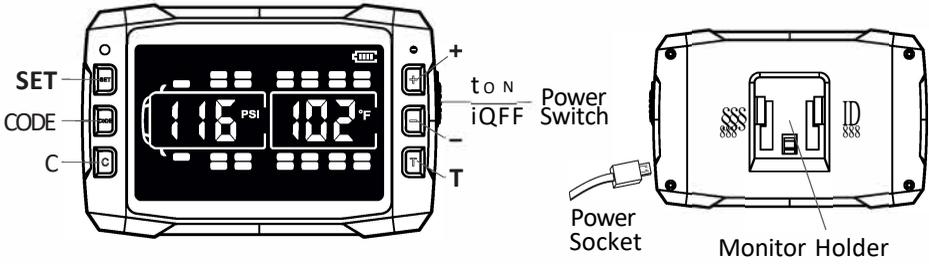

Icon	Description
	Tire Indicator
	Temperature Unit
	Pressure Unit
	Alert Icon
	Sensor Low Battery Indicator
	Monitor Battery Indicator
	Booster Icon

TPMS MAIN FEATURES

Reduce Driving Risks

It was reported that an astonishing 75% of all running tires in the USA are under-inflated and 70% of fatal traffic accidents were caused by tire blow-outs. With a Tire Pressure and Temperature Monitoring System (TPMS), drivers are warned of abnormal tire conditions before it becomes dangerous.

Improve Fuel Economy

Today's tire designs make visual inspection of deflated tires very difficult. Very often, a 30% under inflated tire looks very much like a fully inflated one. A TPMS will make sure your tire pressure is at its proper level.

A 9 psi drop in tire pressure will cause approximately a 4% increase in fuel consumption.

Prolong Lifetime of Tires

The following table shows a simple relationship between tire pressure and tire lifetime:

Tire Pressure	Tire Lifetime
20% under inflated	30% less
30% under inflated	45% less
20% over inflated	10% less

SYSTEM OVERVIEW

This EEZ RV PRODUCTS EezTire SIOC Tire Pressure and Temperature Monitoring System (TPMS) is a heavy duty versatile system designed to operate on a variety of vehicles. (i.e. Motor Coach, 5th Wheel, Travel Trailer, Auto, Trailer, Big Rig, Farm and Mining Equipment).

The system comes with a monitor that can handle 26 wheels with pressures up to 210 psi. The sensors are lightweight and do not affect the tire balance and have easy to change replaceable batteries. The system offers a method of dropping either the towing vehicle or the towed vehicle separately. This allows you to monitor the towing vehicle without a towed or the towed when driving away from the towing vehicle.

The monitor scrolls automatically through each wheel measuring tire pressure and temperature, displaying it on the monitor. Alarms can be preset by the operator so visible and audible alarms can warn the driver of a catastrophic failure (rapid air pressure loss), high or low pressures and high temperature. The alarms and monitoring are sent wirelessly in real time to the cab allowing the operator to monitor tires that are out of their vision. The audible alarm eliminates the need to watch the monitor continually.

Tire Pressure can be displayed in PSI or Bar and temperature in Fahrenheit (°F) or Celsius (°C). Pressure alerts can be set to a different pressure setting for each axle, so additional towed trailers or vehicles are no problem. The high efficient sensors can transmit to distances up to 53 feet without a booster and are easy to install. If needed, an optional booster can be purchased from your dealer or at www.eezrvproducts.com.

The monitor has a rechargeable Lithium Ion battery and can be used as a hand held wireless tire pressure monitor when the operator walks around their vehicle. Sensors come with either the Anti-Theft security feature or Flow-Through feature, and the monitor comes with both an auxiliary charger and a hard wire cable at no extra charge.

The EEZ RV PRODUCTS EezTire 518 SC TPMS System offers both easy installation and one of the largest LCD monitors on the market.

GENERAL INFORMATION

A tire professional or your owners manual should be used to determine the proper tire pressure for your vehicle. Recommended operating tire pressures should be set when the ambient temperature is low or cold.

Dramatic changes in tire pressure can occur because of; increased or decreased ambient temperature, tire contact surface temperature, wheel and axle loads, sun shining on a particular side, etc. These and other conditions should be taken into consideration when setting initial tire operating pressures.

This system cannot warn you of side wall failures; however, it can

supply you with irregular pressures and temperature information that may help to prevent this. If the monitor is shut *off* overnight simply switch the monitor back on before departure and your real-time tire pressures and temperatures will be updated and typically appear on the screen within 5 to 10 minutes. Even if the monitor is in the sleep mode the system is always monitoring and will alarm should any pressure settings or temperatures be out of your set parameters.

The Schrader Valve (core - inside the valve stem) should be the correct size, be in good condition and be able to be depressed fully to allow the release of air to the sensor so it can operate. Some valve stem extensions may cause inaccurate readings if they do not enable the sensor to work correctly, metal bodied stems, or T-Valve type is recommended for best performance. Should you have difficulty with a pressure sensor not working properly, we recommend that you contact a tire professional to ensure that the tire stem and Schrader Valve are installed and operating properly. If using internal tire sealants or balancing compounds/beads check with the manufacturer to ensure they are compatible with TPMS systems or that you have filtered valve cores installed. Over a period, tires may lose pressure naturally, through the tire itself or for other reasons such as rim leakage, etc. After installing the sensors on a tire valve stem, it is recommended to perform a soapy water test using 1/4 dish soap and 3/4 water. Spray the soapy solution on the valve stem and sensor area to ensure the sensor is seated all the way. If air bubbles are seen in any of these areas, the tire may deflate. The wheel sensors are weatherproof and can be run in the rain.

Consulted a tire professional any of these areas prove to be a problem.

Purchasers of this product should not solely rely on this tire pressure monitoring system for safety and should check the condition and pressure of their vehicle-s tires on a regular basis as described by the manufacturer of the vehicle or tire manufacturer. Please note, the EEZ RV PRODUCTS EezTire SIOC TPMS System operates on an RF system, as with many RF tire systems this system can occasionally suffer from interference depending on the location of the system; thus causing the system to be inaccurate or not operate at all. Tire pressures and temperatures are not the only things that can affect tire safety; we suggest daily visual inspections and periodic checks by tire professionals.

PRODUCT FEATURES

Monitor Features.

- Reliable and easy to install.
- Large 3 1/2 inch LCD screen.
- Built-in rechargeable lithium ion battery.
- Automatic light sensor and backlight.
- Built in motion sensor.
- Configurable high/low-pressure warnings.
- Configurable high-temperature warnings.

- Visible and audible alerts.
- Selectable pressure units.
- Can monitor in either standard or metric measurements (psi or bar/° For °C)
- It monitors up to 26 tires maximum.
- Long range between sensors and monitor.
- Per axle measurements can be configured on the tractor and trailer.

Sensor Features

- Reliable cap sensors, easy to install.
- Water resistant.
- Replaceable sensor batteries.
- Fast leak alert.
- Individually coded sensors.
- Anti-theft or flow-through design.

Repeater/Booster Features (optional part)

- Maintains signal stability.
- Records sensor ID, trailer ID and tire pressure and temperature limits.
- Transferable trailer sensor data between monitor and transceiver.
- Visible and audible alerts.
- Fixed alarm for high temperature (194 ° F)

SYSTEM SETUP

This portion is designed to make the set-up of your new EEZ RV PRODUCTS EezTire 518 SC TPMS System easier and faster.

Much of the information contained in this manual is found through real life experience using the system and passed on to hopefully make the utilization of the system easier for you.

Please read through the guide thoroughly before starting. Complete set-up should take approximately 20 minutes.

EEZ RV PRODUCTS EezTire 51 BC SYSTEM

START YOUR SET UP HERE- Step by Step Instructions:

1. Unpack all of the components of your TPMS System and ensure it is complete.
2. Take the number kit from the accessory pack and number all your sensors as indicated below. *(Hint After affixing the number to the sensor take some clear nail polish and paint over the number. This will help ensure it stays on in inclement weather conditions.)*
3. On the diagram on the last page of this manual assign the numbered sensors to each tire as they will be put on your rig and tow vehicle.



4. Program the alarm parameters using *STEP 1: SETTING YOUR SYSTEMS ALARM PARAMETERS*
5. Program each sensor to the monitor using *STEP 2: PROGRAMMING SENSORS TO THE MONITOR*

STEP 1: SETTING YOUR SYSTEMS ALARM PARAMETERS

Refer to the diagram on the /ast page of this manual where you wrote the sensor number for each tire.

1. Next to each axle write down what your tire pressure is by axle and calculate what your alarm setting will be.
2. High-Pressure setting will be (200/4 above axle tire pressure).
3. Low-Pressure setting will be (100/4 below axle tire pressure).

Example: Front Axle Tire Pressure is: 100 psi



High-Pressure Alarm Setting will be: 120 psi (100 psi x 1.20 (or 20%) = 120

Low-Pressure Alarm Setting will be: 90 psi (100 psi x .9 (or 90%) = 90

These are industry standards for the initial set-up, some adjustment may be needed after your first trip. Every brand of tire operates differently, when some brands reach operating temperature the psi will increase 5 psi, other brands may increase 20 - 22 psi. During your first trip, you will see if you need to increase your High-Pressure Alarm setting. For the temperature, it is recommended leaving it at the factory default of 158 degrees F.



STEP 2: Choosing Pressure and Temperature Unit of Measure

1. Press the **SET** button and hold it until you hear the beep. You will first see PSI or BAR (for metric) in the first window. Use the + or - key to scroll between the two. When the one you want to use appears in the screen press and release the SET button. (Pressing and releasing the SET button in this mode is like saying yes to what the screen is showing you)



2. It will automatically move to the next window which will show you °F (Fahrenheit) or °C (Celsius) for the degree setting in the second window. Use the + or - key to scroll between the two. When the one you want to use appears in the screen press the **SET** button and release.


Press the set button again and "°F" will be flashing. Press + or - to change to "°C" if you like. The next time that you press the set button the front axle will be flashing and the words "HIGH PRESSURE" will be displayed. Follow the instructions below.



STEP 3: Choosing per Axle High and Low Parameters

Using the plus or minus keys scroll to your "HIGH" pressure. When you reach your desired pressure press and release the "SET" button again and "LOW PRESSURE" will be displayed. Use the plus or minus keys to set your low pressure. Press the set button again and the next axle will flash "HIGH PRESSURE". Make your adjustments the same way as for the first axle. Skip any axles that you are not using and just keep hitting the "SET" button until you get to the axle that you want to set.

When you have finished setting your parameters PRESS and HOLD the SET button until the monitor beeps and you are back to display mode. Keep in mind that the monitor will time out in 40 seconds. So write down your settings before you start.



PROGRAMMING SENSORS TO THE MONITOR

METHOD 1 tabletop (this is the easiest way)

1. Using the switch on the right side center of the monitor, push it up to turn on the monitor. Place the monitor flat on the table in front of you. Then place your numbered sensors on the table about a foot away from the monitor.

2. Press and hold the CODE button on the monitor left side middle button until you hear the beep. At this time, you will see all 26 tires on the monitor screen, and the right front tire should be flashing. That is tire number 1. Following your diagram on the back of your manual, place the first sensor on the table touching the base of the next to the SET button. You will see "FFF FFF" on the screen. All F's means that a sensor is not programmed yet to that location. Then press and release the code button very quickly one time. The monitor will beep, and the sensor's code will be displayed. Press the plus button to go to the next tire and do the same and so on until all sensors are programmed.

3. When you have programmed the last sensor, press the "CODE" button down until the monitor sets off the alarm or just turn the monitor off. Then turn the monitor on again to make sure the tires are programmed in the right position.

4. Install your sensors to the valve stems in the order that you programmed them. Give the monitor 5 to 10 minutes to register all the sensors. Once the sensors are synced you will not have to re-sync unless you turn off the monitor. You can leave the monitor turned on by the monitor's battery power. The monitor's internal battery will run for 60 hours or 30 days between charges.

NOTE:

If you get an ID LF (low frequency), error code, hit the sensor LF hard on the table to wake it up and repeat. If you still get the ID LF repeat, press the CODE button and release, pause and then press the CODE button and release again. If it still gives ID LF then check the battery voltage with a volt meter. The voltage on a fresh battery should be 3.3v. If it is below 2.9v replace the battery with a fresh one.

Method 2: AIR ACTIVATION

1. Using the switch on the left side center of the monitor push it up to turn on the monitor.
2. Place the sensors on the tires as numbered on your diagram but do not tighten them yet.
4. Press and hold the "CODE" button on the lower right side down until you hear the monitor beep. At this time, you will see all 26 tires on the monitor screen and the right front (number one) tire should be flashing.

Place the monitor within 3 inches of the sensor and screw the sensor all the way on. Wait a few seconds and the monitor will beep and a sensor code will be displayed. If it does not press and release the "CODE" once. Once coded go to the next tire and repeat the steps making sure to press the plus button to go to the next tire.

YOUR SYSTEM IS NOW SET-UP AND READY FOR USE

If you have problems, see trouble shooting page.


MONITOR DISPLAY IN OPERATING MODE

After the sensors have all been programmed and the system is in operating mode the monitor display will automatically scroll through each monitored tire one by one. The tire being transmitted will flash on the screen, and the pressure and temperature for that wheel will be displayed on the monitor.

When the monitor is initially turned on it may take up to 5 minutes for the monitor and sensors to sync up before the pressure and temperature will show up on the monitor. Wait for all the tires to read before driving off.

After this time if you see one sensor is still not transmitting the pressure and temperature you may want to delete the sensor from the monitor and reprogram it.

On an initial set up, if the tire still fails to indicate a pressure and temperature remove the sensor and back the Schrader Valve (valve core) out approximately 1/8 to 1/4 turn and reinstall the sensor. This will ensure there is sufficient contact and air pressure to the sensor.

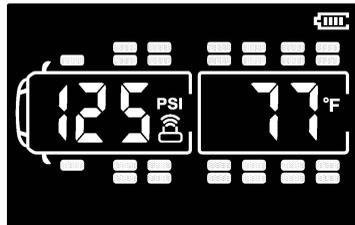

NOTES and RECOMMENDATIONS:

- There will be an audible single "chirp": and the tire will flash if the monitor has not received a reading from that tire after 30 minutes.
- You can also manually scroll through the tires one by one by pressing the + or - button. If you manually select a particular tire the monitor will show its readings for 10 seconds.

- The monitor comes equipped with a light sensor; the backlight will typically come on if the vehicle is in motion and the light level is low enough. You may also wave your hand in front of the monitor to manually activate the backlight or by pressing any button. It can be turned off by pressing the + button for 3 seconds. The light sensor is located on the lower left of the monitor, just left of the "LINK" button.
- The monitor comes with a built-in motion sensor; it will go to sleep (energy saver mode) if there is no movement of the vehicle detected for approximately 15 minutes and wake up when it detects movement.
- It is recommended that the monitor is shut off when the system is not in use, or you are staying in the vehicle overnight.
- When external power is applied to the monitor it will override the manual on/off switch on the left side. If you hard wire your system charger to a "keyed" switch the system will go off when the keyed power is turned off. If you are using the auxiliary charging cord, you will have to unplug the charger manually.
- You **will** get a longer service life from your monitor-s internal battery if you disconnect the external power source and allow the battery to deplete through normal operations every couple weeks naturally.

The factory default settings are as follows: High Pressure (175 PSI), Low Pressure (100 PSI), Temperature (158 °F). To restore Factory Defaults: Turn off the monitor; press the SET button and activate the monitor at the same time. The RED light will flash, and factory settings will be restored.

Pressure Unit:	PSI
High Pressure:	175 psi (12.1 BAR)
Low Pressure:	100 psi (6.9 BAR)
Temperature Unit	OF
High Temperature:	158 °F (70 °C)

HIGH LOW PRESSURE


RESTORE PARAMETERS to FACTORY DEFAULTS:

Turn off the monitor; press the SET button and activate the monitor at the same time. The RED light will flash, and factory settings will be restored.
 Pressure Unit: PSI High Pressure: 175 psi (12.1 BAR) Low Pressure: 100 psi (6.9 BAR) Temperature Unit: OF High Temperature: 158 °F (70 °C)

MONITOR INSTALLATION



Your system comes with three mounting options: a plastic tower with suction cup mount for window or dash, low profile mount for dash, low profile triangle mount for dash. Some people prefer to use Velcro or the small bean bags used for cell phones on their dash.

1. mount it onto the windscreen or left side window using the suction cup provided ensuring you do not obstruct the driver's vision of the road.
2. Plug the power adapter into the cigarette lighter or auxiliary power outlet and connect the power cable to the monitor. Ensure the pin is aligned straight when inserting it into the right side of the monitor. When hard wiring it is recommended using a "keyed" power source. Metal Triangle Mount Bracket If the bracket is needed, please follow the instructions below. Be sure not to obstruct the driver's vision when the monitor is installed.

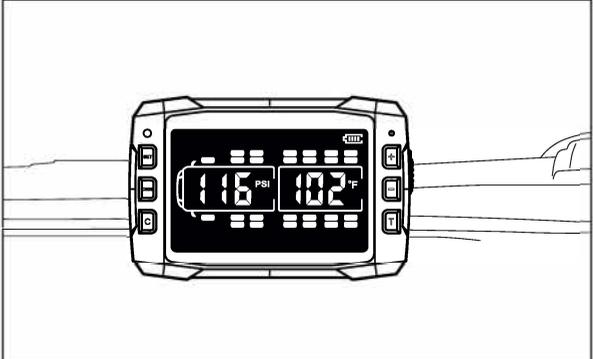

Metal Triangle Mount Bracket

If the bracket is needed, please follow the instructions below. Be sure not to obstruct the driver's vision when the monitor is installed.

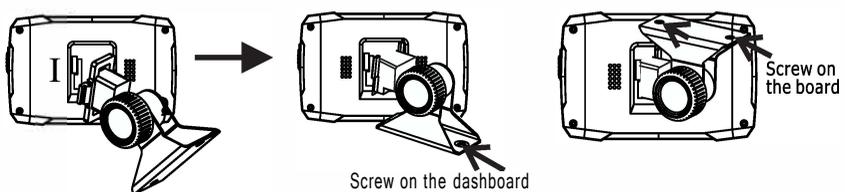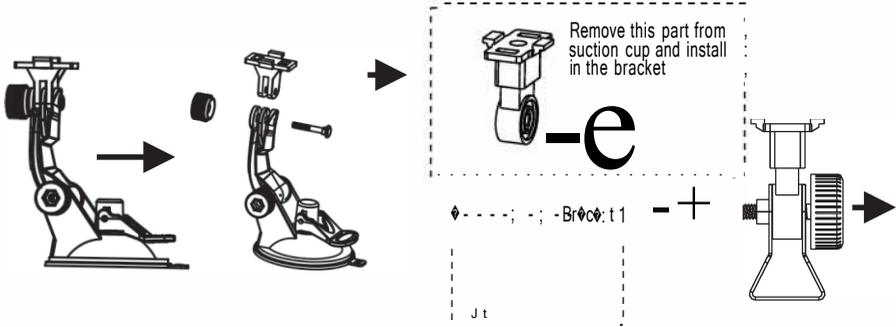

SENSOR INSTALLATION


- 1. Remove the tire valve cap and mount the corresponding sensor on the valve stem using the wrench provided.**
- 2. The sensor is designed to be difficult to remove without using the wrench provided.**
- 3. Simply screw the wrench clockwise.**

NOTES:


1. If you have trouble getting the wrench into the location, you can unscrew the two halves of the Anti-Theft housing, keep the bottom part of the housing in place on the sensor and screw the sensor onto the valve stem by hand. Once the sensor is in place, pull the lower part of the housing up and screw the top half of the Anti-Theft housing onto it. The Anti-Theft housing will now spin when turned on the sensor. The reverse can be done to remove if necessary.

2. If you do not need the Anti-Theft function, you may remove the Anti-Theft cover by just unscrewing the two halves. Mount the inner sensor on the valve directly. If you do not use the Anti-Theft housing, it is recommended to put a small bead of silicone around the seam where the sensor unscrews to replace the battery. This will give extra protection against moisture entering the battery housing in inclement weather.

Anti-Theft Sensor

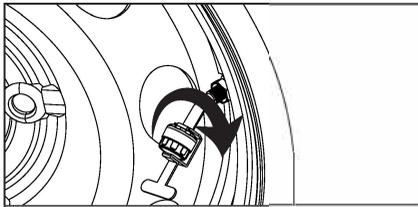

Install the sensor onto tyre valve clockwise.

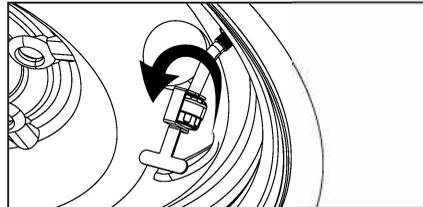


Use the spanner provided to screw the hex nut to the sensor and tighten it.

Flow-Through Sensor



***Do not over tighten the sensor cap to prevent possible damage to the sensor.**



User can inflate or deflate your tire from the sensor valve and without taking sensor off.

DELETING A SINGLE SENSOR ID



1. In operating mode, press and hold the **CODE** button for 3 seconds, release it after the beep to enter the coding mode. A flashing tire icon and **ID** code are displayed. Press the **+** or **-** button to select the desired tire.
2. Press and hold the **SET** button for 3 seconds. A double-beep sound will be issued, and you will see **FFF FFF** after the sensor code is deleted successfully. To return to operating mode, press and hold the **CODE** button for 3 seconds until you hear a beep.

DELETING ALL SENSORS ID

1. In operating mode, press and hold the **CODE** button for 3 seconds, release it after the beep to enter the coding mode. A flashing tire icon and **ID** code are displayed.



2. Press and hold the **TRACTOR** button for 3 seconds, release after a long beep, all the sensors ID are deleted. To return to operating mode, press and hold the **CODE** button for 3 seconds until you hear a beep.

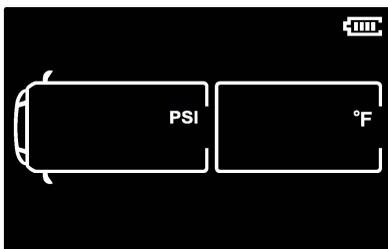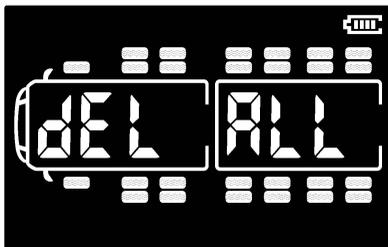

OTHER FUNCTIONS

Typical Scrolling Display During normal operation, the monitor scrolls through and shows the tires one by one for approximately 6 seconds. A single audible chirp will be issued if the monitor does not receive one of the sensors data for more than 30 minutes. You can manually scroll through and select the tire by pressing the+ or - button. A manually selected tire will be displayed for 10 seconds. Backlight and Motion Sensor The monitor has a built-in light and motion sensor. The backlight turns on when it detects the vehicle is in motion and when it is dark enough or you may wave your hand in front of the monitor to activate it. Press any button hold the + button for 3 seconds. The monitor will enter sleep mode to conserve battery life if the motion sensor does not detect motion for 15 minutes. It will come back to operating mode when the vehicle is moving again or other motion.

Backlight and Motion Sensor

The monitor has a built-in light and motion sensor. The backlight turns on when it detects the vehicle is in motion and when it is dark enough or you may wave your hand in front of the monitor to activate it. Press any button on the monitor to turn on the backlight manually; to turn it off, press and hold the + button for 3 seconds.

The monitor will enter sleep mode to conserve battery life if the motion sensor does not detect motion for 15 minutes. It will come back to operating mode when it detects the vehicle is moving again or other motion.

Temporarily Remove Towing Vehicle or Towed/Trailer Image From Screen

To drop the image of the towing vehicle from the screen press and release the LINK and+ key at the same time. To display it back on the screen press and release the LINK and+ key at the same time again. (This will allow you to use the system in your towed when not connected to the coach.)

To drop the image of the towed vehicle/trailer from the screen press and release the LINK and - key at the same time. To display it back on the screen press and release the LINK and - key at the same time again.

Charging the Monitor



The lithium-ion battery inside the monitor, when fully charged is capable of running for up to 60 hours between charges. When the battery symbol bars are gone, or the box appears, a recharge is required.




OUT OF PARAMETER ALERTS

The system cycles from tire to tire every 6 seconds, if there is a significant change in pressure or temperature in this cycle it will transmit it to the monitor. If not, it will maintain the reading and transmit a full update every 5 minutes. This is to conserve the sensor battery. If any reading goes out of the pre-defined parameter, the system will interrupt the cycling and give you a real-time alert; you will notice three things:

1. An audible alarm;
2. The red light on the lower right side of the monitor will flash;
3. The corresponding tire on the monitor will flash, and a text message of what is wrong will appear on the screen.

Press any button to switch the alarm off. However, the red light will not be turned off until the correct pressure, and temperature settings are restored to within range.
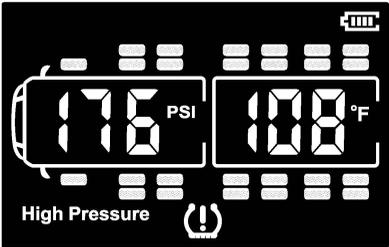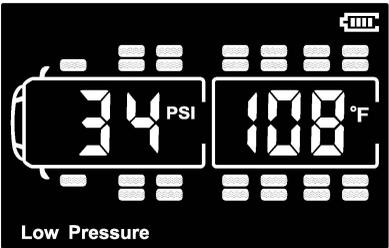
<u>MONITOR ALERTS</u>	
High-Pressure Alert	
When the sensor detects High-Pressure in a tire, it will send an alert to the monitor immediately. HIGH-PRESSURE will show on the LCD and the corresponding tire icon will flash. The audible alarm will be on together with the flashing red light. Press any button to turn off the alarm. However the flashing red light and text will continue until the problem is corrected.	 The image shows a digital monitor display with a black background. On the left, a tire icon is highlighted with a white border, and the number '76' is displayed next to 'PSI'. On the right, the number '108' is displayed next to '°F'. At the bottom left, the text 'High Pressure' is shown. At the bottom center, there is a white exclamation mark inside a circle. In the top right corner, there is a battery status icon consisting of four horizontal bars.
Low-Pressure Alert	
When the sensor detects Low-Pressure in a tire, it will send an alert to the monitor immediately. LOW-PRESSURE will show on the LCD and the corresponding tire icon will flash. The audible alarm will be on together with the flashing red light. Press any button to turn off the alarm. However the flashing red light and text will continue until the problem is corrected.	 The image shows a digital monitor display with a black background. On the left, a tire icon is highlighted with a white border, and the number '34' is displayed next to 'PSI'. On the right, the number '108' is displayed next to '°F'. At the bottom left, the text 'Low Pressure' is shown. In the top right corner, there is a battery status icon consisting of four horizontal bars.
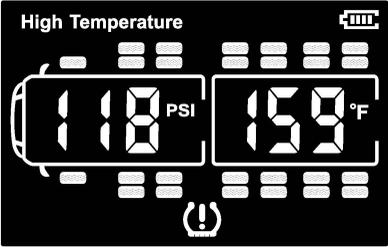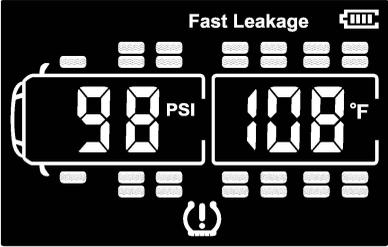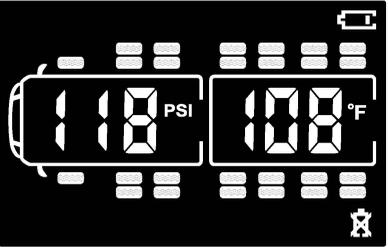
<p>High-Temperature Alert</p> <p>When the sensor detects High-Temperature in a tire, it will send an alert to the monitor immediately. TEMP HIGH will show on the LCD, and the corresponding tire icon will flash. The audible alarm will be on together with the flashing red light. Press any button to turn off the alarm. However, the flashing red light and text will continue until the problem is corrected.</p>	 <p>The LCD display shows 'High Temperature' at the top right. The left side displays '118 PSI' and the right side displays '159 °F'. A tire icon on the left is highlighted with a white border. A warning icon (exclamation mark in a triangle) is at the bottom center.</p>
<p>Fast Leak Alert</p> <p>When the sensor detects a rapid air loss in a tire, it will send an alert to the monitor immediately. FAST LEAKAGE* will show on the LCD, and the corresponding tire icon will flash. The audible alarm will be on together with the flashing red light. Press any button to turn off the alarm. However, the flashing red light and text will continue until the problem is corrected.</p>	 <p>The LCD display shows 'Fast Leakage' at the top right. The left side displays '98 PSI' and the right side displays '100 °F'. A tire icon on the left is highlighted with a white border. A warning icon (exclamation mark in a triangle) is at the bottom center.</p>
<p>Sensor Low Battery Alert</p> <p>When the sensor battery becomes low, it will send an alert to the monitor immediately. The LOW BATTERY ICON will show on the LCD, and the corresponding tire icon will flash. The audible alarm will be on together with the flashing red light. Press any button to turn off the alarm. However, the flashing red light and icon will continue until the problem is corrected.</p>	 <p>The LCD display shows a battery icon at the top right. The left side displays '118 PSI' and the right side displays '100 °F'. A tire icon on the left is highlighted with a white border. A low battery icon (battery with 'X') is at the bottom right.</p>

Notes:

**Fast Leak Alert Parameter is preset by the factory to alert when an air loss of 225 psi per minute occurs.*



*** If a sensor battery dies while in storage or the system is off you will not get an alarm on the monitor when you turn it on. If you are not getting a reading check the sensor battery.*

Replacing Anti-Theft Sensor Battery

When you here the low battery tweet sound coming from the monitor it is time to replace the battery.

Replace with a CR1632 battery, which operates at -40 ° F to 176 ° F. These can be purchased at many hardware stores, Radio Shack or large Wal mart on-line at either eBay, Amazon.com or on our site www.eezrvproducts.com.


NOTE: If a sensor stops transmitting the first thing you want to check is the sensor battery. Remove the battery and check it with a voltmeter, it should read 3.2V. Anything below 2.9V should be replaced.

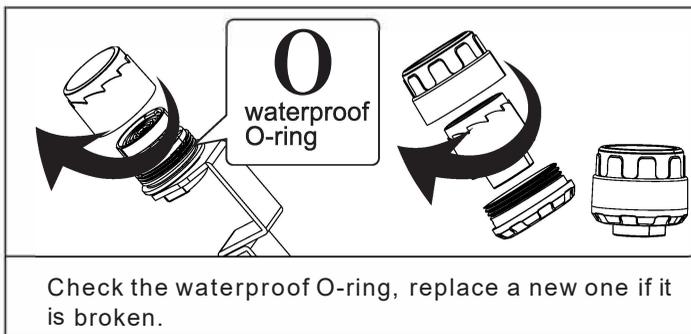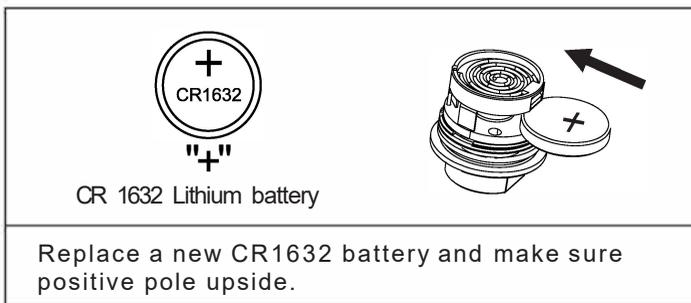

Flow Through Sensor Battery replacement

When you hear the low battery tweet, the next time you park the vehicle watch the monitor. Every time the monitor comes to that sensor the monitor will tweet. Install CR 1632 battery which operates at -40° F to 176° F. These can be purchased at many hardware stores, Home Depot or large Wal mart's on-line at eBay, Amazon.com or on our site www.eezrvproducts.com. Use the hex/Allen wrench provided to remove the anti-theft screw and take off the sensor. Then use a small Philips screw driver to take the cap marked "EasyTire" off. Under the cap is the battery. Remove it and replace it with a new CR1632 battery. Depending on how long the battery was low you may have to reprogram the sensor.

Use the hex/al/en wrench provided to remove the anti-theft screw and take off the sensor.

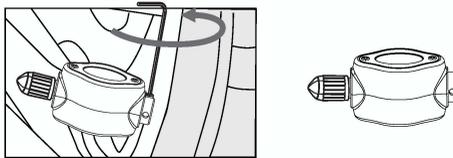

Remove the screws from the sensor cap and remove the cap.




Take the battery out.



Replace a new CR1632 battery, ensure the positive+ is facing upwards.



Check that the waterproof rubber seal is in its proper position. Screw the sensor cap back on.

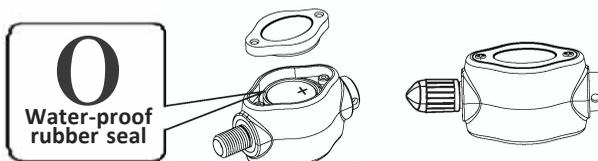

REPEATER/SIGNAL BOOSTER INSTALLATION & PROGRAMMING


Motor Coach Placement:

It is recommended to install the Repeater in an outside-aft compartment or in your rear closet.



Tractor -Trailer Placement:

It is recommended to install the Repeater outside between the tractor and towed trailer.

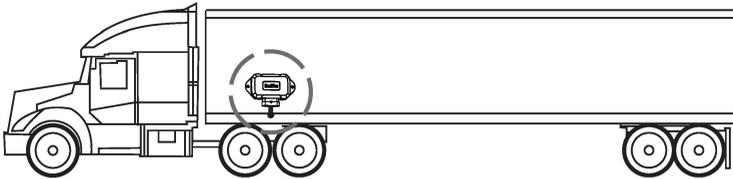

Fifth Wheel Placement:


It is recommended to install the Repeater in an outside compartment (battery/ generator) under the front bed area.



INSTALLATION INSTRUCTIONS

Be sure to wire the Repeater into a 12V power source that will be "on" during vehicle operation. The Repeater will be on as soon as it is connected to power. The red light stays on when power is connected.

The center button that lights up also serves as a reset button.

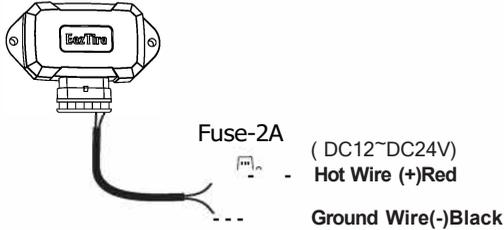

INSTALLATION OF THE REPEATER ONLY REQUIRES IT BEING CONNECTED TO A 12V POWER SOURCE AND GROUND—WHEN THE RED LIGHT COMES ON IT IS FUNCTIONING.

(Tractor Trailer (Big Rigs) that do drop and pulls of multiple trailers you need to use the next section on page 26 because it requires a link function.)

REPEATER/BOOSTER ALERTS

High/Low Pressure and Fast Leak Alerts.

When the sensor detects high/low-pressure abnormalities and rapid leaks, it will send an alert to the Repeater/Booster immediately. The audible alarm will be on together with the flashing red light. Press the button on the transceiver to turn off the alarm. However, the flashing red light will continue until the problem is corrected. The system is set to alarm if you loose more than 7.25 psi in a minute.

High-Temperature Alert.

The Repeater/Booster has a fixed temperature alarm at 194° F/90° C. The sensors send the temperature readings to the Repeater. If the temperature is above 194° F/90° C, an audible alarm will be on together with the flashing red light. Press the button on the transceiver to turn off the alarm. However, the flashing red light will continue until the temperature is dropped below 194° F/90° C.

SPECIFICATIONS

Monitor

OPERATIONAL TEMPERATURE	-4 ° F to 176 ° F
STORAGE TEMPERATURE	-22 ° F to 185 ° F
CHARGER INPUT VOLTAGE	DC 8 to 30V
TRANSMISSION FREQUENCY	433.92 MHz
SIZE	114(L) x 72(W) x 24(H)mm
WEIGHT	5.0ounces

Sensors - Standard

OPERATIONAL TEMPERATURE	-40 ° F to 176 ° F
STORAGE TEMPERATURE	-40 ° F to 185 ° F
PRESSURE RANGE	0 to 13 bar, 0 to 188 psi
PRESSURE ACCURACY	+/- 1.5 PSI (+0. BAR)
TEMPERATURE ACCURACY	+/- 5 ° F
TRANSMISSION POWER	<10dBm
TRANSMISSION FREQUENCY	433.92 MHz
BATTERY LIFE	3-4 Years (CR1632 -40 ° F to 176 ° F)
SIZE	diameter 21 mm,height 22 mm(without antitheft housing) diameter26mm height24mm (with antitheft housing)
WEIGHT	.4 ounces (without antitheft housing) .56 ounces (with antitheft housing)

Sensors - Flow Through

OPERATIONAL TEMPERATURE	-40 ° F to 176 ° F
STORAGE TEMPERATURE	-40°F to 185 ° F
CHARGER INPUT VOLTAGE	DC8to30V
TRANSMISSION FREQUENCY	433.92 MHz
SIZE	116 (L) x 68 (W) x 25 (H) mm
WEIGHT	.78 ounces

Repeater/Signal Booster (optional parts)

OPERATIONAL TEMPERATURE	-4 ° F to 176 ° F
STORAGE TEMPERATURE	-22 ° F to 185 ° F
WORKING VOLTAGE	12 to 24V
TRANSMISSION POWER	<18dBm
TRANSMISSION FREQUENCY	433.92 MHz
SIZE	127(L) x 80(W) x 25(H)mm
WEIGHT	5.19ounces

TROUBLESHOOTING & FREQUENTLY ASKED QUESTIONS:

1. What does it do?

Answer: Measures the air pressure and temperature within the tire to ensure your tires are operating within safe parameters.

2. How does it work?

Answer: Tire pressure monitoring systems continuously monitor the pressure in the tires through sensors located on the valve stem. The information collected by the sensors is transmitted to an onboard monitor that displays the tire data and warns the driver when tire pressure or temperature is outside of the preset level.

3. What is the advantage of tire pressure monitoring system?

Answer: Under-inflated tires need more fuel than properly inflated tires. The system in most cases will notify you of an impending problem before to a blowout. It will save you money while providing peace of mind while driving.

4. Is low tire pressure easily detected by the eye?

Answer: Under-inflated tires are visually difficult to detect. It is recommended that tires are inspected and checked monthly with an accurate gauge. The TPMS is not intended to be a substitute for regular tire maintenance.

5. Why does tire pressure change during driving?

Answer: Many factors affect tire pressure including ambient temperature changes, road conditions and tire damage such as punctures. Tire pressure drops about one psi for every 10 degrees F drop in ambient temperature. Additionally, tires lose as much as 1.5 psi per month as air escapes the tire and rim naturally.

6. Why there are no pressure and temperature readings on the LCD, only tire icon flashes?

Answer: The monitor will stop showing the pressure and temperature if it doesn't get the signal from the sensor. During normal operation, the monitor scrolls and displays the tires one by one for approximately 6 seconds. A single audible chirp will sound if the monitor does not receive one of the sensors data for more than 30 minutes.

7. What happens if I remove the sensors from the wheels?

Answer: You will get a warning on your display screen. There is no way to rid of this warning except delete the sensors CODE on the monitor. As the system cycles, it will warn you each time it tries to pick up a signal from that sensor.

8. How do I turn off the "low-pressure" warning on the monitor?

Answer: Press any button will stop the audible alarm, you will need to inflate your tires to the appropriate pressure to stop the red light and text warning.

9. My TPMS warning light comes on when I start my car, but after a few minutes of driving, it turns off.

Answer: In cold weather, the sensor reads a lower PSI. As you drive, the air within your tires warm up, and thus the pressure is also increased.

10. I just filled my tires with air a few weeks ago, and it is showing me that I have low pressure.

Answer: A change in climate can affect the readings of the sensor because of the change in pressure of the tire. If it has only been a short period, you may want to verify the tire pressure with a gauge to determine if it is a leak or a faulty reading.

11. How is the accuracy of the temperature readings on external sensors?

Answer: There will be some differentiation between the actual inside temperature and the sensor reading due to cooling as the air passes through the sensor. However, it will still be an indicator of a tire heating up due to air loss, soft side wall, a brake drum dragging or a bearing seizing and heating up the rim.

12. If one sensor in a kit stops working, is it possible to replace sensors alone?

Answer: Yes, each sensor has a unique ID CODE; just program the new sensor to the monitor, the new sensor will replace the old sensor automatically.

13. Do I need to re-install the sensors after tires rotation?

Answer: NO. The sensor should be removed from the tire before to it being moved. As long as the sensor is replaced on the position no reprogramming is required.

14. Can I combine sensors or boosters from other manufacturers with the EEZ RV TPMS PRODUCTS System?

Answer: It is not recommended to mix and match components from other systems. We cannot guarantee parts from other systems will work properly or at all with each other.

15. Is it possible that sensors interfere with each other?

Answer: No, sensors transmit separately, it takes very little time to transmit signals. So there is an exceptionally low probability that sensors would interfere with each other.

16. What's the transmitting distance from sensors and monitor?

Answer: It used to be easy to determine if you would need a Repeater/Booster and at that around 53 ft was a general rule we would look at. Nowadays though the big diesel pushers have so much electronics in the engine compartment they can get interference. As well as the structure of the frame, number of slides and the amount metal on many of the new rigs of all styles can also be a factor. So you can get interference for issues other than distance. Systems will typically read fine sitting static, you won't see the interference until about 20-30 minutes into the trip.

17. Is signal booster available?

Answer: Yes, we do carry an optional signal booster for long vehicles or if it determined you have either electronic or structural interference. You may order an optional Repeater/Booster on our site at www.eezrvproducts.com.

18. Can I reset the monitor to factory settings?

Answer: Yes, to restore factory defaults, turn *off* the monitor, press the set button and turn the monitor on at the same time. The red light will flash and factory settings restored.

19. Do I need a signal booster (transceiver)?

Answer: It used to be easy to determine if you would need one. The general rule was around 53 ft, but nowadays, though the big diesel pushers have so much electronics in the engine compartment, they can get interference. As well as the structure of the frame, the number of slides and the amount of metal on many of the new rigs of all styles can also be a factor. So you can get interference for reasons other than distance. Systems will typically read fine sitting static; you won't see the interference until about 20-30 minutes into the trip.

20. Does this system measure temperature as well as pressure?

Answer: Yes, unlike some systems from other suppliers that just measure pressure the EEZ RV PRODUCTS EezTire TPMS System measures internal tire air temperature and has an over temperature alarm. This is an advantage on vehicles that are stored for extended periods of time where brake calipers can stick after the first brake application and cause a dragging brake situation. As well as a back up to the low-pressure alarm as increased internal tire temperature is caused by low or reduced air pressure.

21. I am having CODE setting issues, what can cause those?

Answer: Coding issues can be due to incorrectly sized or a bent valve core (Dill Valve) or valves torque to tight or too loose in the tire valve stem thus not allowing the sensor to operate. For issues coding sensors on a tire with valve extenders, the sensor should be tested on a tire valve with no extender to help isolate the problem. There is additional information on our website.

22. I have an alarm, what should I do?

Answer: First, pull over safely to the side of the road. Determine which wheel has an alarm, by checking the monitor icons; determine what type of alarm you have. It could be a leaking tire, a tire that has over pressure and too much air in it related to your base pressure setting, this can happen after a long run on a hot day, it could be an overheating situation, etc. By checking the operating instructions you can see the different monitor icons that are associated with each condition, a flashing red light may or may not mean you have a deflation; each alarm icon tells you what the problem is. You will need to fix the problem before the red light will stop.

23. What is the Sleep Mode?

Answer: If the monitor is motionless for more than 15 minutes (vehicle is stationary) it will go into sleep mode to save the battery. When it detects motion again, it will beep, and the screen will come to life signifying it has come out of sleep mode. If the monitor is shut off overnight, simply switch the monitor back on before your departure and your real-time tire pressure and temperatures will be updated in around 5 minutes on the monitor. Even if your monitor is in the sleep mode the system is always monitoring your tires and will alarm should any pressure or temperature become out of your set parameters.

24. I am getting a Sensor Low Battery alarm, what should I do?

Answer: Eventually all batteries lose power or die. The EEZ RV PRODUCTS sensor has replaceable batteries that can be easily replaced whenever needed. Please see above for detailed directions. The battery is a CR1632 watch type battery available from jewelry stores, electronics stores or on-line. On the road, a Walmart jewelry counter is the cheapest.

25. How can I test the system?

Answer: The system should frequently be tested for fast leak operation. The monitor should be placed in the driver's location, and sensors unscrewed then tightened one at a time. The fast leak alarm should operate and then reset on the monitor.

26. Do I need a special tool to install the sensors?

Answer: The EEZ RV PRODUCTS EezTire System comes with a complimentary Anti-Theft System on each sensor. To install a sensor, you will have to use one of the two wrenches provided. You can easily remove the Anti-Theft housing by unscrewing the two halves of the Anti-Theft Housing; this will allow you to install the sensor by hand with no wrench. This can be beneficial when installing a sensor on your inside dual.

27. Can I set different pressures for each tire or axle?

Answer: Axles can be set to a different pressure, for tow & towed vehicles.

28. Can I use tire valve extensions?

Answer: It is common to use extensions, and most tire valve extenders work fine, if you have problems with sensors mounted on extenders, test the sensor on a valve stem without an extension to see if it is a sensor problem or an extension problem. Loose extender connections can sometimes cause alarms. Using extension supports with both braided and straight extensions is critical.

29. How accurate is the system?

Answer: Our sensors are very accurate, and any gauge readings should be made after resetting the sensors. Measurements of 1 psi need a controlled laboratory type system to be accurate. The tire pressure is accurate within +/- 1.5 PSI. Temperature is accurate to within +/- 5

degree F. The pressures and temperatures can vary dramatically from wheel to wheel depending on many factors, such as sun shining on one side, vehicle load, castor/ camber/alignment/brake temps. Even race cars turning left all the time generate higher pressures and temps on one side. Tire gauge accuracy can vary wildly and their quality is not dependent on their cost. Temperature compensation is a requirement in a good gauge. (Gauges that read the same at -40 & 110 degrees) slide type gauges that rely on friction are often inaccurate.

30. How much air do I put in my tires?

Answer: Always set the monitor pressure to the same as the cold inflation pressure. As an example some people set the monitor at 100 psi and then put 105 psi in the tire for good luck, by doing this the chance of over pressure alarms is increased.

31. I get an alarm when I have been stopped for a while?

Answer: In extreme cases it is possible to get a slow leak alarm after the vehicle has been pushed hard and the tire pressure has dramatically increased and upon stopping the tire cools quickly and the pressure drops simulating semi rapid air loss. This situation is often caused by high moisture content in the air in the tire.

32. How is my monitor powered?

Answer: The monitor is powered by an internal rechargeable battery which holds a charge up to 60 hours before requiring recharging. A cigar lighter cord AND hard wire kit comes with the base system, this means you can take the monitor in your hand around your vehicle for sensor setup and tire pressure adjustment, it is like having an electronic tire gauge.

33. Does the system come with a warranty?

Answer: Yes, it comes with a 3 year limited warranty on defective parts except batteries. Please see warranty section for full details.

34. Do I have to enter special CODEs for each sensor on set-up?

Answer: Each sensor comes pre programmed with its own unique CODE, for sensor set up the monitor detects each sensors CODE when they are installed.

35. Is there anything special I need to do for winter storage?

Answer: It-s a good idea to remove the sensors and monitor from your vehicle if parked for an extended time, especially in cold weather: Store the system in a warm location. Mark each sensors wheel position or store them in an egg carton so they can be replaced in the same wheel position to avoid having to do a new set up. Sensors use minimal power when they have no pressure on them.

36. I have one sensor not reading, I do not have a low battery signal?

Answer: The first thing to do is check the battery with a voltmeter, it should be reading approx. 3.2V. A battery can die when the rig is parked or the monitor off preventing a low battery signal.

CAUTIONS

1. The monitor should be installed inside the vehicle where it does not affect normal driving.
2. The monitor should be well fixed to avoid falling off during driving.
3. After the sensor installation, it is highly recommended to check for any air leakage.
4. Regular tire inspection and maintenance is still necessary.
5. After the system is installed correctly, the driver does not need to stare at the monitor all the time while driving. Alerts will be issued when abnormal conditions are found in the tires.

*Information in this manual is subject to change without notice.

LIMITED WARRANTY & GUARANTEE

Please contact the dealer you purchased it from to handle your warranty or guarantee issues. EEZ RV PRODUCTS will, within 36 months from date of original purchase, repair or replace free of charge any defective component (except batteries) which upon careful inspection is found, in our sole judgment, to have material or manufacturing defects, provided it is received freight prepaid, accompanied by the original purchasers sales slip and an authorized Return Merchandise Authorization number (RMA #). If you purchased your unit directly from EEZ RV PRODUCTS you may obtain an RMA # by emailing customerrelations@eezrvproducts.com.

DISCLAIMER OF WARRANTY: The warranty applies to the original purchaser only. The warranty does not carry over nor is it transferable to another party. Neither the seller nor the manufacturer will be liable for any loss damage or injury directly or indirectly arising from the use or inability to determine the use of this product. Before using, the user shall determine the suitability of the product for its intended use, and the user shall assume all responsibility and risk in connection herewith.

**EEZ RV PRODUCTS, LLC • PO Box 25766 • Yuma, AZ 85367
United States
www.eezrvproducts.com**

EEZ RV PRODUCTS

Tire Pressure & Temperature Monitoring System Tire Sensor Placement Diagram

Handles up to 26 wheels

High Parameter Setting

Low Parameter Setting



Tire Pressure (cold)

High Parameter Setting

Low Parameter Setting



Tire Pressure (cold)

High Parameter Setting

Low Parameter Setting



Tire Pressure (cold)

High Parameter Setting

Low Parameter Setting



Tire Pressure (cold)

EEZ RV PRODUCTS
www.eezrvproducts.com

