



918M5 L90F Front End Loader

Powerful L90F

The powerful Volvo L90F Front End Loaders built for gravel, harbors, goods terminals, construction sites and rail networks. This versatile Loader can tackle an challenge thrown its way. From moving stock piles to relocating Ballast, lifting rails or moving pallets

The attachments for your worksite

Our Volvo Loader comes with an extensive attachment range including

- Bucket
- Forks
- Jib

All Available to tackle and job

Quiet low-emission engine and Automatic Power Shift (APS)

The environmentally friendly engine delivers high torque near idle rpm which gives the Volvo excellent rim-pull, low fuel consumption and minimal emissions.

The Volvo Automatic Power Shift is the starting point for fast and efficient work cycles. The APS adapts to the operator's operating style resulting in less fuel consumption and emissions by always selecting the right gear.

The L90F in Details

Engine - Volvo D6E LBE3

Max Power - 1700r/min

SAE J1995 Gross - 129kW

ISO 9249, SAE J1349 Net - 128kW

Max Torque - 1600 r/min


SAE J1995 gross - 770Nm

Economic Working Range - 1100 - 1600 r/min




Dirt Monster Pty Ltd


L90F Working Specs

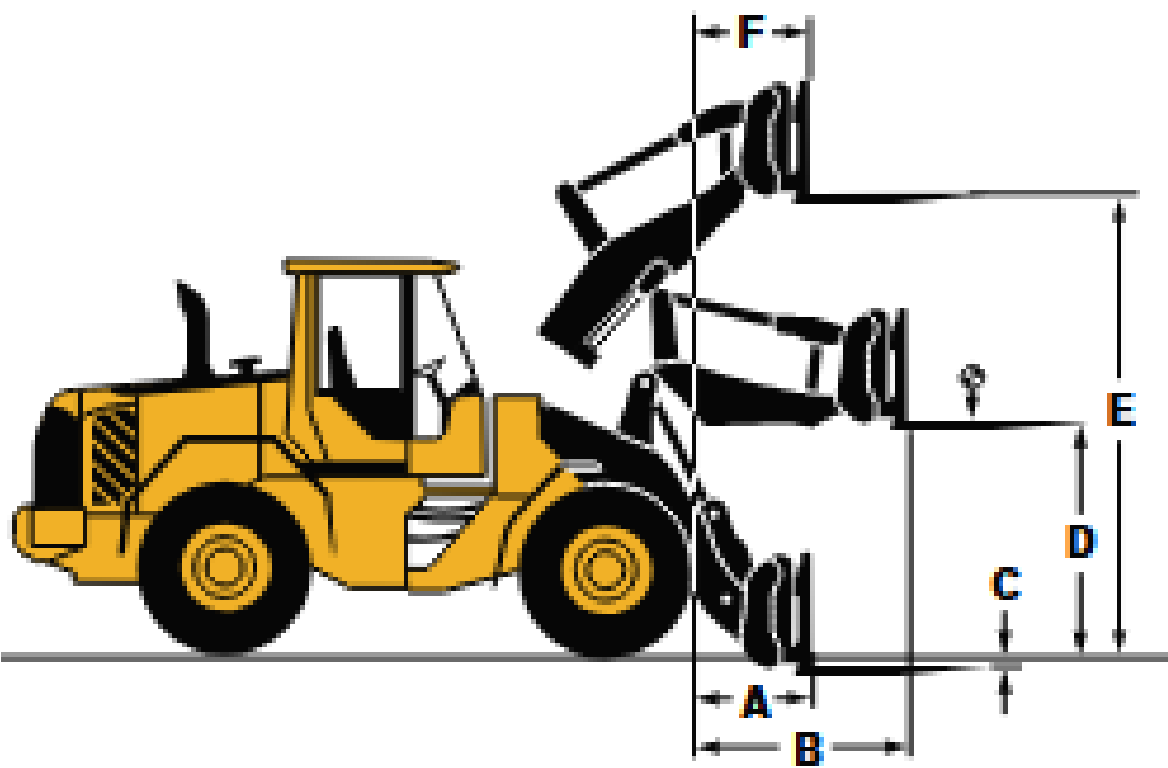

A	960mm
B	1700mm
C	-8mm
D	1790mm
E	3770mm
F	740mm
operating Weight	14500k

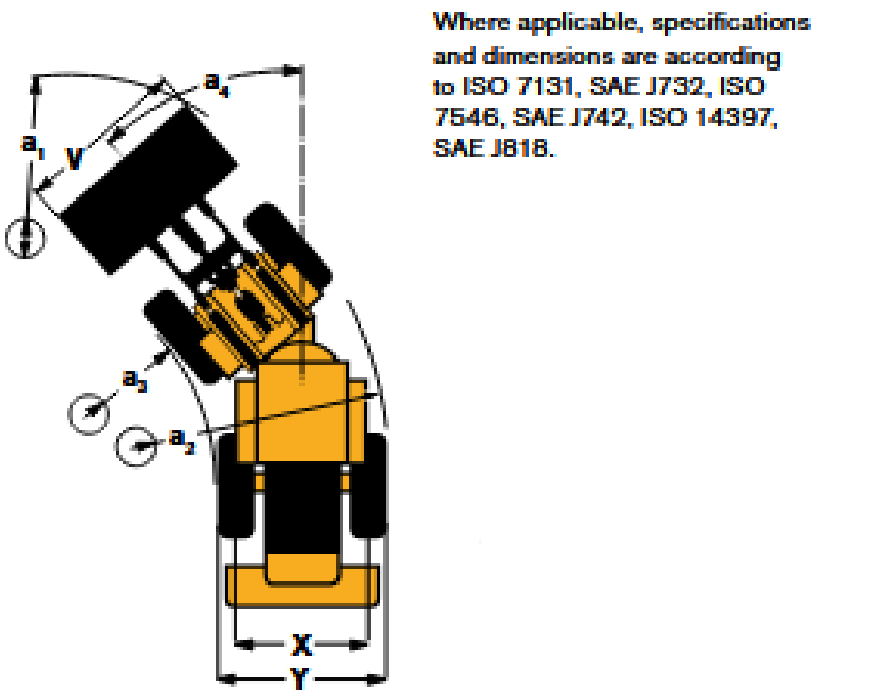

Where applicable, specifications and dimensions are according to ISO 7131, SAE J732, ISO 7546, SAE J742, ISO 14397, SAE J818.

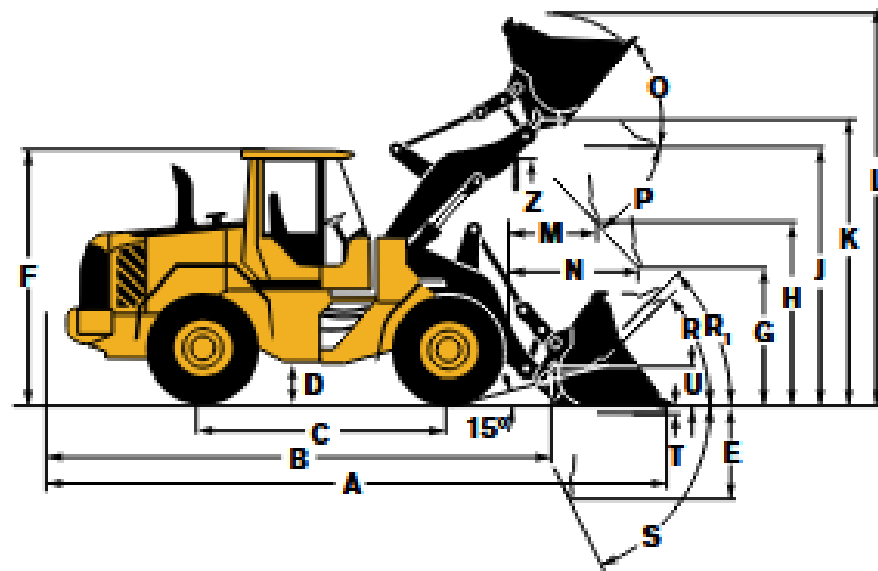

B	6120mm	R	44'
C	3000mm	R*	49'
D	460mm	S	67'
F	3280mm	T	110mm
G	2130mm	U	490mm
J	3650mm	X	1960mm
K	3960 mm	Y	2490mm
O	57"	Z	3300mm
P Max	44"	A2	5370mm

A	2760kg	J	1370mm
B	2130kg	K	1920mm
C	1740Kg	L	2470mm
D	2640mm	M	2040mm
E	2040mm	N	3030mm
F	1440mm	O	4020mm
G	3280mm	P	1530mm
I	5550mm	Q	5330mm
H	4410mm	R	6290mm
		S	7250mm

