
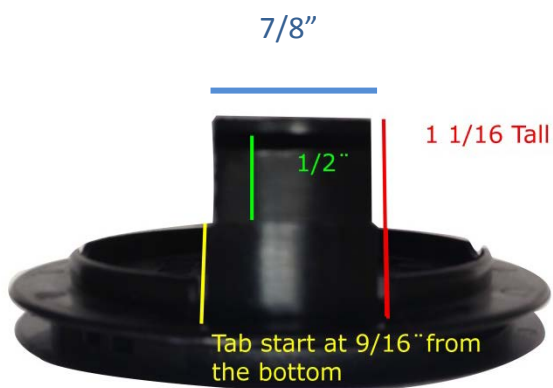


The bottom of your Black & Decker should be held in place by 2 tabs opposite to each other. Press one of the tabs towards the head to remove the bottom. Remove the spool and the spring. You should end up with a hollow bottom with holes on each side. Kind of like the following diagram (side view):

The GrassGator 8030 has tabs opposite to each other with the following dimensions:

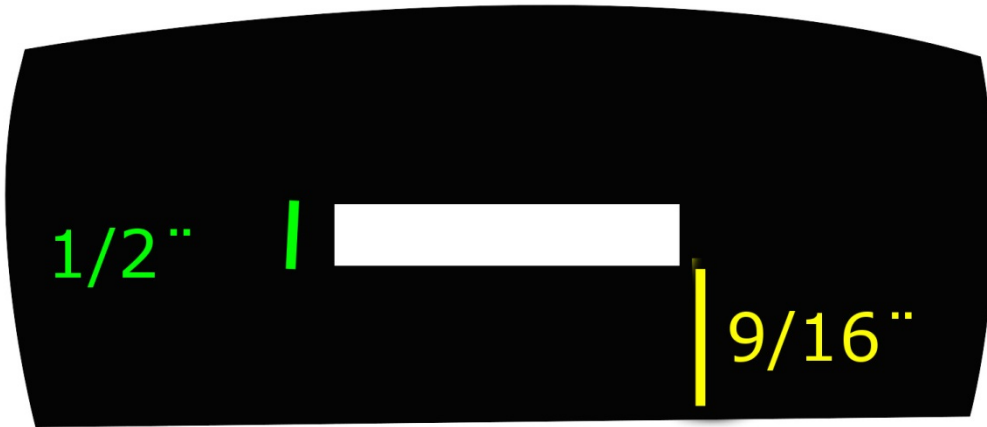

In order to find out if the GrassGator will fit your B&D on your B&D measure:

- The diameter between the holes for the tabs
- The space between the bottom of the head and the hole for the tab
- The length and height of the hole for the tab

As the pictures show, the hole for the tabs should be  $3 \frac{5}{16}$ " apart.

The hole for the tabs should be  $\frac{9}{16}$ " from the bottom of the head.

The hole for the tabs should be  $\frac{1}{2}$ " tall and  $\frac{7}{8}$ " wide.

If your trimmer has these same measurements then the 8030 will fit. Anything different won't let the tabs fit in place.