

Combination of 感性与理性的结合 Sense and sensibility

坚持精致的工艺，严谨考究细节的态度，是萨威一直保持高品质



Global Solutions, Direct to Your Business

joseph@globalsourcingdirect.us



Global Solutions, Direct to Your Business

joseph@globalsourcingdirect.us

KEY FEATURE

连接形式: 螺纹、软管、焊接

材质为: SUS304, SUS316制成

管道流量控制: DN8-100及1/4"-4"

适用介质: 水、油、气体及与CF8M/CF8适宜的各种腐蚀性介质


Type: Screwed, Hose, head

Material Quality: SUS304, SUS316


Size: DN8-100&1/4"-4"

Applicable Mediums: WOG & Every kind of corrosive mediums suitable for CF8M/CF8


内接头 Hexagon Nipple

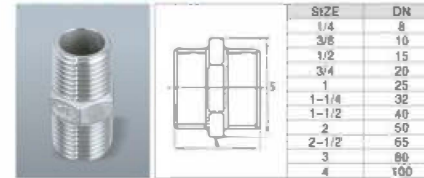


外接头 Socket Banded

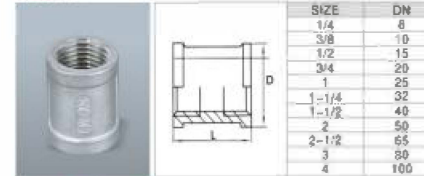


45°弯头 45°Elbow

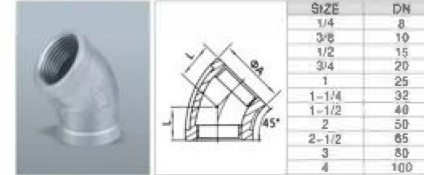


90°弯头 90°Elbow

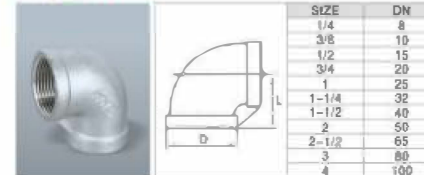


异径弯头 Reducer Elbow

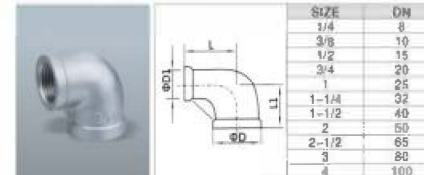


抛光皮管外牙 King Nipple

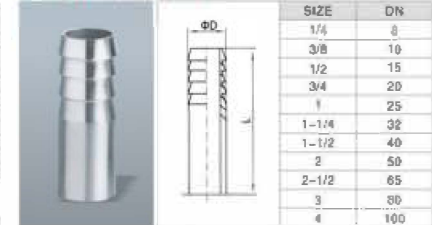


水管接头 Hose Nipple

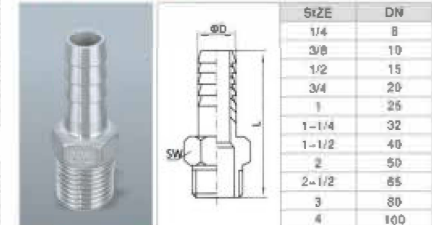

堵头 Square Plug

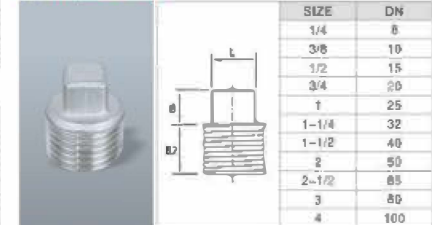

管盖 Round Cap

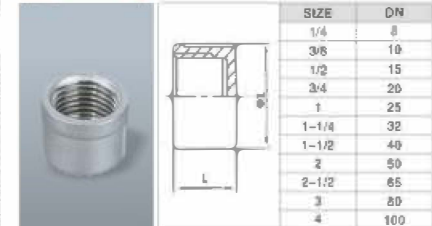



45° 弯头
45° Elbow

90° 弯头
90° Elbow

内接头
Heaven Nipple

外接头
Socket Bend

内螺纹活接头
Female Threaded Union

堵头
Square Plug



管盖
Round Cap

内外牙90° 弯头
External and internal teeth 90° Elbow

平台弯头
Stainless steel break

四通
Four links

异径弯头
Reducer Elbow

三通
Three links



异型管箍
Reducer Socket Banded

外螺纹活接头
Male Female Threaded Union

水管接头
Water Nipple

补芯
Bushing

光面内丝
Smooth silk

双头外丝
Double ended wire



抛光皮管外牙
King Nipple

加长单头丝
Lengthen Dan Tou Si

加长外丝
Lengthening outer thread

皮管接头
Skin pipe joint

单头丝
Dan Tou Si

加厚管箍
Thick hoop

平管接头
Half Nipple



承插焊三通
Socket Weld Tee

内螺纹三通
Thread Tee

丝扣活接头(由任)
Thread Union

锻钢螺纹四通
Forged steel Thread Cross

焊接弯头
90° Elbow

焊接三通
Tee



大小头
welding head

异径三通
Reducing Outlet tee

不锈钢卫生级快装三通
Stainless steel sanitary grade three pass

卫生级焊接弯头45°
Sanitary welding elbow 45°

不锈钢卫生级焊接三通
Stainless steel sanitary welding three links

不锈钢卫生级快装式90° 弯头
Stainless steel sanitary grade fast loading type 90° elbow



一片式球阀
One-piece ball valve

二片式丝扣球阀
Two-piece thread ball valve

三片式丝扣球阀
Three-piece thread ball valve

三片式丝扣高平台球阀
Three-piece thread high platform ball valve



丝扣闸阀
Thread gate valve



丝扣截止阀
Thread cut-off valve



丝扣过滤器
Thread filter



旋启式止回阀
Swing check valve



三片式对焊球阀
Three-piece butt welding ball valve



三通球阀 T型L型
Three ball valve type T type L



丝扣气动角座阀
Thread type pneumatic angle seat valve



平焊法兰
Flat welding flange



法兰盖
Flange cover



蝶阀专用法兰
Special flange for butterfly valve



对焊法兰
Welded flange



凸面平焊法兰
Convex flange

不锈钢丝扣管件系列

Stainless steel threaded pipe fittings series

特点 FEATURE

连接形式: 螺纹、软管、堵头

材质为: SUS304、SUS316制成

管道流量控制: DN8-100及1/4"-4"

适用介质: 水、油、气体及与CF8M/CF8适宜的各种腐蚀性介质


Type: Screwed, Hose, Plug

Material Quality: SUS304, SUS316

Size: DN8-100 & 1/4"-4"


Applicable Mediums: WOG & Every kind of corrosive mediums suitable for CF8M/CF8

内螺纹活接头 Female Threaded Union




SIZE	DN
1/4	8
3/8	10
1/2	15
3/4	20
1	25
1-1/4	32
1-1/2	40
2	50
2-1/2	65
3	80
4	100

加长单头丝 Lengthen Dan Toubi




SIZE	DN
1/4	8
3/8	10
1/2	15
3/4	20
1	25
1-1/4	32
1-1/2	40
2	50
2-1/2	65
3	80
4	100

内外螺纹活接头 Male/Female Threaded Union



SIZE	DN
1/4	8
3/8	10
1/2	15
3/4	20
1	25
1-1/4	32
1-1/2	40
2	50
2-1/2	65
3	80
4	100

加长外丝 Lengthening outer thread




SIZE	DN
1/4	8
3/8	10
1/2	15
3/4	20
1	25
1-1/4	32
1-1/2	40
2	50
2-1/2	65
3	80
4	100

异型管箍 Reduce Socket Banded




SIZE	DN
1/2	3/4
1/2	1
3/4	1
1/2	1 1/4
3/4	1 1/4
1	1 1/4
1	1 1/2
3/4	1 1/2
1	1 1/2
1/2	2
3/4	2
1	2
1/2	2
1/2	2

皮管接头 Skin pipe joint




SIZE	DN
1/4	8
3/8	10
1/2	15
3/4	20
1	25
1-1/4	32
1-1/2	40
2	50
2-1/2	65
3	80
4	100

抛光管子内丝 Coupling



SIZE	D(φ)
1/8	15
1/4	18
3/8	22
1/2	26
3/4	33.7
1	40
1 1/4	48
1 1/2	55
2	63
2 1/2	85
3	100
4	127

单头丝 Dan Toubi



SIZE	DN
1/4	8
3/8	10
1/2	15
3/4	20
1	25
1-1/4	32
1-1/2	40
2	50
2-1/2	65
3	80
4	100

特点 FEATURE

产品特点: 1. 100%



内螺纹三通 Thread Tee

产品材质(Material): 304、316等材质
规格(Size): 1/4"-4"
压力等级(Pressure): 2000LB-6000LB



承插焊三通 Socket Weld Tee

产品材质(Material): 304、316等材质
规格(Size): 1/4"-4"
压力等级(Pressure): 3000LB-9000LB



内外丝90°弯头 90°Street Elbow

产品材质(Material): 304、316等材质
规格(Size): 1/4"-1"
压力等级(Pressure): 2000LB-6000LB



丝口活接头(角征) Thread Union

产品材质(Material): 304、316等材质
规格(Size): 1/4"-3"
压力等级(Pressure): 2000LB-6000LB



塞头 Plug

产品材质(Material): 304、316等
规格(Size): 1/4"-4"
压力等级(Pressure): 2000LB-6000LB



半管接头 Half Nipple

产品材质(Material): 304、316等材质
规格(Size): 1/4"-4"
压力等级(Pressure): 2000LB-9000LB



补芯 Bushing

产品材质(Material): 304、316等材质
规格(Size): 1/4"-4"
压力等级(Pressure): 2000LB-6000LB



锻钢螺纹四通 Forged steel Thread Cross

产品材质(Material): A106等材质
规格(Size): 1/4"-4"
压力等级(Pressure): 2000LB-6000LB


Providing you 给你不一样的品质
With unique quality

精良的设计与制造，成就真正的经典，庐威给你不一样的产品质量



1PC、2PC不锈钢内螺纹球阀

1PC、2PC Stainless steel threaded end ball valve

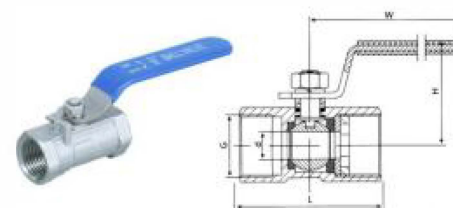

1PC不锈钢内螺纹球阀


特点 FEATURE

1PC结构设计
标准通径
产品规格: 1/4"-4" (DN6-100)
工作压力: 1000PSI
螺纹端可按BSPT, NPT, DIN2999制造

1PC Body
Standard Bore
Size: 1/4"-4" (DN6-100)
Working Pressure: 1000PSI
Threaded End: BSPT, NPT, DIN2999

1PC 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	WCB CF8M
2	阀盖	Bonnet	WCB CF8M
3	阀座	Seat	RPTFE
4	球	Ball	SS304 SS316
5	密封垫	Seal Gasket	PTFE
6	阀杆密封	Stem seal	PTFE
7	阀杆	Stem	SS316
8	防静电装置	Anti-Static Device	SS304
9	阀杆填料	Stem Packing	PTFE
10	填料压盖	Packing Gland	SS304
11	弹性垫圈	Spring washer	SS304
12	手柄	Handle	SS201

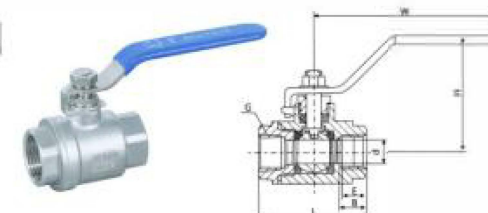

2PC不锈钢内螺纹球阀

特点 FEATURE

2PC结构设计
全通径
产品规格: 1/4"-4" (DN6-100)
工作压力: 1000PSI (1.6MPa)
螺纹端可按BSPT, NPT, DIN2999制造

2PC Body
Full Bore
Size: 1/4"-4" (DN6-100)
Handle With Locking Device
Working Pressure: 1000PSI (1.6MPa)
Threaded End: BSPT, NPT, DIN2999

1PC 尺寸列表 DIMENSION LIST

NPS	DN	d	L	H	W
1/4	6	5	40	22	60
3/8	10	7	45	26	68
1/2	15	9	57	31	88
3/4	20	12	68	34	88
1	25	15	72	38	105
1-1/4	32	20	79	43	105
1-1/2	40	25	85	50	124
2	50	32	101	57	124
2-1/2	65	38	125	89	180
3	80	50	150	102	190
4	100	65	195	120	215

2PC 材料列表 MATERIAL LIST


No.	部件名称	Part Name	材料Material
1	阀体	Body	CF8 CF8M
2	阀盖	Bonnet	CF8 CF8M
3	球	Ball	SS304 SS316
4	阀座	Seat	RPTFE
5	阀杆	Stem	SS304 SS316
6	手柄	Handle	SS201
7	填料	Packing	PTFE
8	密封垫	Seal Gasket	PTFE
9	螺母	Nut	SS304
10	把手	Handle cover	PLASTIC
11	垫圈	Thrust washer	SS304

2PC 尺寸列表 DIMENSION LIST

NPS	DN	d	L	H	W
1/4	6	10	55	42	95
3/8	10	12	55	42	95
1/2	15	15	62	51	108
3/4	20	20	75	58	115
1	25	25	85	77	135
1-1/4	32	32	102	83	150
1-1/2	40	38	108	97	175
2	50	50	124	106	190
2-1/2	65	65	163	122	220
3	80	80	185	133	250
4	100	100	225	162	320

3PC不锈钢内螺纹、对焊球阀

3PC Stainless steel threaded end, butt welding ball valve

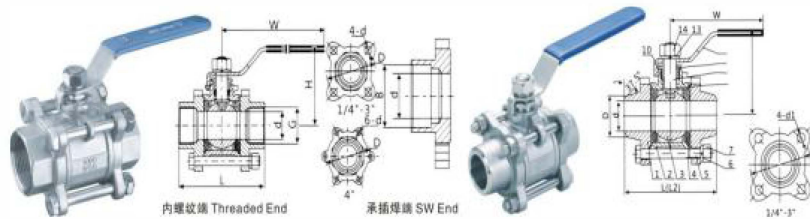

3PC不锈钢内螺纹球阀

3PC不锈钢对焊球阀

特点 FEATURE

3PC结构
全通径
产品规格: 1/4"-4"
工作压力: 1000PSI
螺纹端可按BSPT, NPT, DIN2999制造
可选螺纹或承插焊端
可选带锁手柄

3PC Body
Full Bore
Size: 1/4"-4"
Working Pressure: 1000PSI
Threaded End: BSPT, NPT, DIN2999
Female Threaded or Socket Welded End
(Optional) Locking device Handle

3PC内螺纹 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	CF8M
2	阀盖	Bonnet	CF8M
3	阀座	Seat	RPTFE
4	球	Ball	SS316
5	密封垫	Gasket	PTFE
6	阀杆密封	Stem seal	PTFE
7	阀杆	Stem	SS316
8	防静电装置	Anti-Static Device	SS304
9	阀杆填料	Stem Packing	PTFE
10	填料压盖	Packing Gland	SS304
11	弹性垫圈	Spring Washer	SS304
12	手柄	Handle	SS304
13	螺母	Stem Nut	SS304

3PC对焊 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀盖	Bonnet	CF8M
2	阀体	Body	CF8M
3	球	Ball	SS316
4	阀座	Seat	RPTFE
5	螺栓	Bolt	B8
6	垫片	Gasket	SS301
7	螺母	Stem Nut	B8
8	阀杆密封	Stem Seal	PTFE
9	阀杆	Stem	SS316
10	填料	Packing	PTFE
11	填料压盖	Packing Gland	SS304
12	手柄	Handle	SS304
13	弹性垫圈	Spring Washer	SS301
14	螺母	Stem Nut	SS304

特点 FEATURE

3PC结构
全通径
产品规格: 3/8"-4"
工作压力: 1000PSI
工作温度: ≤150°C(PPL<300°C)
对焊端或加长对焊端
可选带锁手柄

3PC Body
Full Bore
Size: 3/8"-4"
Working Pressure: 1000PSI
Working Temperature: ≤150°C(PPL<300°C)
Butt-Welded End or Extended Butt-Welded End
(Optional) Locking device Handle

3PC内螺纹 尺寸列表 DIMENSION LIST

NPS	DN	d	L	H	W	4-d	B1	B2
1/4	8	11.5	65	46	95	7	12	15
3/8	10	12	65	46	95	7	14	17.2
1/2	15	15	75	46	110	8	18	21.3
3/4	20	20	85	54	110	8.5	25	26.9
1	25	25	90	64	140	8.5	32	33.7
1-1/4	32	32	112	69	140	10	38	42.4
1-1/2	40	38	120	76	155	10	45	48.3
2	50	50	145	86	180	11	57	60.3
2-1/2	65	65	170	120	220	16	76	76.1
3	80	80	200	150	260	18	89	88.9
4	100	100	263	170	350	20	108	114.3

3PC对焊 尺寸列表 DIMENSION LIST


NPS	DN	d	L	L2	H	4-d1	W
3/8	10	12	65	100	50	7	95
1/2	15	15	75	110	60	8	110
3/4	20	20	85	130	63	8.5	110
1	25	25	90	150	80	8.5	140
1-1/4	32	32	112	160	86	10	140
1-1/2	40	38	120	180	94	10	155
2	50	50	145	200	104	11	180
2-1/2	65	65	170	230	140	16	220
3	80	80	200	260	152	18	260
4	100	100	263	320	170	20	350

广式内螺纹球阀

Bar stock ball valve with internal thread

不锈钢内螺纹三通球阀

Stainless steel threaded end three-way ball valve

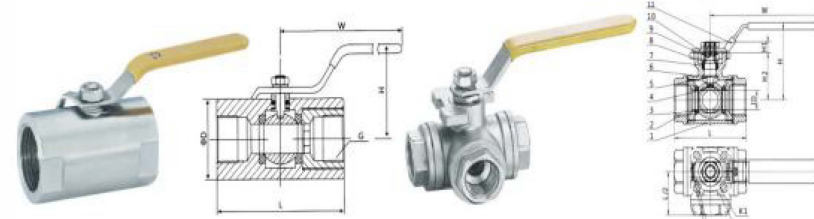

广式内螺纹球阀

不锈钢内螺纹三通球阀

特点 FEATURE

工作压力: 0-1.6-6.4MPa(1000PSI)
标准通径
产品规格: 1/2"-2"
锻造不锈钢阀体
适用温度: <150°C(PPL<300°C)
适用介质: 水、空气、油品等
螺纹端可按BSPT, NPT制造

Working Pressure: 0-1.6-6.4MPa(1000PSI)
Standard Bore
Size: 1/2"-2"
Body made of Forged Steel
Applicable Temperature: <150°C(PPL<300°C)
Applicable Media: Water, Gas, Oil
Threaded Standard: BSPT, NPT

广式内螺纹球阀 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	A105 1Cr18Ni9Ti SS304 SS316
2	球、杆	Ball, Stem	SS304 SS304 SS304 SS316
3	密封	Seal	PTFE, RPTFE, PPL
4	手柄	Handle	SS304

不锈钢内螺纹三通球阀 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	CF8M CF8 WCB
2	阀盖	Bonnet	CF8M CF8 WCB
3	阀座	Seat	PTFE/RPTFE PTFE/PTFE PTFE
4	球	Ball	316 SS304 SS304
5	阀杆	Stem	316 SS304 SS304
6	弹性垫圈	Thrust Washer	PTFE PTFE PTFE
7	填料	Packing	PTFE PTFE PTFE
8	填料压盖	Packing Gland	SS301 SS301 SS302
9	六角螺母	Hex Nut	SS301 SS301 SS302
10	手柄	Handle	SS301 SS301 SS302
11	锁片	Lock	SS301 SS301 SS302

特点 FEATURE

标准通径设计
球体通路: L-通或T-通
工作压力: 1000PSI(PN16)
工作温度: -10°C-250°C(-4°F-482°F)
1/4"-3"
硅溶胶阀体及阀盖/防吹出阀杆
手柄可选带锁装置: ISO5211平台
驱动方式: 手动、气动、电动
螺纹端可按: NPT/BSPT/BSPP、G/BSPT/BSPP

Standard Port: L-Port & T-Port
W.P.: 1000PSI(PN16)
W.T.: -20°C-250°C(-4°F-482°F)
1/4"-3"
Investment Casting Body & Cap
Blow-Off Proof Stem
Locking Device: ISO5211 Mounted Pad
Type of Drive: Manual, Pneumatic, Electric
Thread End: ANSI B1.20.1(NPT)/
ISO228/1 & DIN259(G)/DIN2999 & BS21(BSPT)

广式内螺纹球阀 尺寸列表 DIMENSION LIST


NPS	d	D	L	W	H
1/2	11	32	60	110	58
3/4	13	38	67	110	62
1	17	45	73	110	68
1-1/4	23	53	90	150	75
1-1/2	25	61	97	150	83
2	32	73	112	160	90

不锈钢内螺纹三通球阀 尺寸列表 DIMENSION LIST

NPS	DN	ID	L	H	W	H1	H2	K1	K2	d1	d2	F
1/2	15	12	71	71	145	8.5	37	36	42	6	6	9
3/4	20	15	81	74	145	14	40	36	42	6	6	9
1	25	17	90	83	155	13	46	42	50	8	7	11
1-1/4	32	25	125	94	155	11	57	42	50	6	7	11
1-1/2	40	32	138	113	196	18.5	70	50	70	7	9	14
2	50	38	152	120	196	18.5	77	50	70	7	9	14

意大利超薄型球阀

Italy-type wafer ball valve

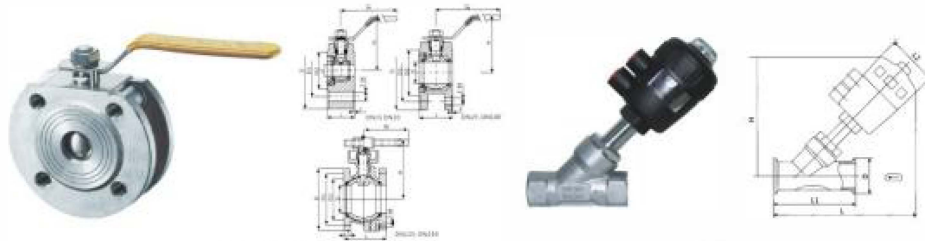

意大利超薄型球阀

气动角座阀

特点 FEATURE

一体式结构(设计DN125以上为分体结构)
全通径流量
产品规格从DN15-DN250
延伸长度按Q/SYF012-96制造
法兰包络按GB/T9113制造
阀门密封和试验按API598
手柄或蜗轮传动

1PC Body/2PC Body for DN125 and Over
Full Bore
Size: 1/2" to 10"
Face to Face: GB/T9113 Q/SYF012-96
Flanged Standard ANSI B16.5
Checked and Tested API598
Handle or Gear operated

意大利超薄型球阀 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	WCB CF8M
2	阀盖	Bonnet	WCB CF8M
3	阀座	Seat	PTFE
4	球	Ball	SS304 SS316
5	密封圈	Seal Ring	PTFE
6	阀杆密封	Stem Seal	PTFE
7	阀杆	Stem	SS316
8	防静电装置	Anti-Static Device	SS304
9	阀杆填料	Stem Packing	PTFE
10	填料压盖	Packing	SS304
11	弹性垫圈	Spring Washer	SS304
12	手柄	Handle	SS304
13	螺母	Stem Nut	SS304

气动角座阀 参数 Data

接口(英寸)	内径(mm)	KV值	最大工作压力	最小控制压力	执行机构	流向	安装位置
Interface	Inner Bore	(m³/h)	(bar) Max working pressure	(bar) Min Control pressure	Actuator	Flow Direction	Install Way
G3/4	20.0	8.0	0-16	2.7	50	阀座上方 Above the seat	
G1	25.0	19.0	0-16	2.0	63		
G1 1/4	32.0	27.5	0-16	2.0	83		
G1 1/2	40.0	42.0	0-16	2.0	83		
G2	50.0	52.0	0-16	2.0	80		
G2 1/2	65.0	77.0	0-14	1.6	100		

特点 FEATURE

压力范围: 0-16bar
介质温度: -10°C~+180°C
环境温度: -10°C~+60°C
规格: DN15-DN65, 1/2"-2 1/2"
阀体材料: 不锈钢, CF8/304, CF8M/316
密封材料: 聚四氟乙烯
执行机构外充: 氟里昂
介质: 中性气体、空气、水、蒸汽
制造标准: 3A, ISO, DIN, IDF


Pressure range: 0-16bar
Medium temperature: -10°C~+180°C
Environmental temperature: -10°C~+60°C
Specification: DN15-DN65, 1/2"-2 1/2"
Body material: Stainless steel, CF8/304, CF8M/316
Sealing material: PTFE Actuator material: PA
Medium: Neutral gas, air, water, Vapor
Manufacture standard: 3A, ISO, DIN, IDF

意大利超薄型球阀 尺寸列表 DIMENSION LIST

1.6MPa												2.5MPa											
DN	d	D	D1	D2	T	F	L	W	H	3-B	D	D1	D2	F	T	L	W	H	3-B				
10	15	95	60	46	-	2	30	100	00	4-10	95	05	40	2	-	35	120	71	4-10				
20	30	130	70	56	-	2	38	120	65	4-12	105	75	66	2	-	38	120	71	4-12				
25	35	135	75	61	-	2	42	130	70	4-12	110	80	71	2	-	42	140	78	4-12				
32	42	135	100	75	16	2	52	170	90	4-14	135	100	75	3	18	52	170	90	4-14				
40	50	145	110	85	18	2	62	200	95	4-16	145	110	85	3	18	62	200	105	4-16				
50	65	160	125	100	18	2	72	240	120	4-18	160	125	100	3	18	72	240	120	4-18				
65	80	180	145	120	20	2	90	280	130	4-20	180	145	120	3	20	90	280	145	4-20				
80	95	190	160	135	22	3	110	320	145	4-22	195	160	135	3	22	110	320	170	4-22				
100	125	215	180	155	24	3	130	400	160	4-24	210	180	155	3	24	130	400	180	4-24				
125	160	240	210	185	28	3	160	480	177	4-28	240	210	185	3	28	160	480	210	4-28				
150	190	260	240	210	28	3	180	500	190	4-28	260	240	210	3	28	180	500	240	4-28				
200	250	315	295	265	30	3	215	590	260	4-30	310	295	265	3	30	215	590	295	4-30				

气动角座阀 尺寸列表 DIMENSION LIST

DN	L	L1	L2	H	D	执行机构
						Actuator
15	180	120	64	64	137	50.5
20	185	140	64	64	145	50.5
25	210	160	80	80	173	50.5
32	240	176	80	80	210	50.5
40	250	190	80	80	260	50.5
50	330	210	100	100	301	64

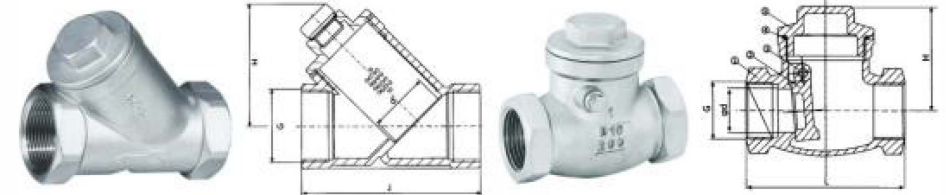

不锈钢内螺纹Y型过滤器

旋启式内螺纹止回阀

特点 FEATURE

Y型结构设计
全通径流量
产品规格从1/4"到2"
工作压力: 400/800PSI
螺纹端可按BSPT, NPT, DIN2999制造

Y-type Body
Full Bore
Size 1/4" to 2"
Working Pressure: 400/800PSI
Threaded End: BSPT, NPT, DIN2999

特点 FEATURE

全通径流量
产品规格从1/4"-3"
工作压力: 200PSI/600PSI
内螺纹端可按BSPT, NPT, DIN2999制造

Full Bore
Size 1/4" to 3"
Working Pressure: 200PSI/600PSI
Female Threaded End: BSPT, NPT, DIN2999

不锈钢内螺纹Y型过滤器 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material	Q'TY
1	阀体	Body	CF8 CF8M	1
2	阀盖	Bonnet	CF8 CF8M	1
3	过滤网	Gauze Filter	SS316 SS316	1-2
4	垫片	Gasket	PTFE PTFE	1
5	密封圈	Seal Ring	PTFE PTFE	1
6	螺塞	Plug	SS304 SS316	1

旋启式内螺纹止回阀 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	CF8M
2	阀瓣	Disc	CF8M
3	销轴	Pin	SS304
4	密封圈	Seal Ring	PTFE
5	阀盖	Bonnet	CF8

不锈钢内螺纹Y型过滤器 尺寸列表 DIMENSION LIST

NPS	400PSI			800PSI		
	d	L	H	d	L	H
1/4	9	50	34.3	9	50	34.3
3/8	9	50	34.3	9	50	34.3
1/2	15	60	41	14	60	41
3/4	20	75	51	18	75	51.83
1	25	90	60	22	90	62.3
1-1/4	32	100	70	28	100	71.3
1-1/2	40	119	80	38	120	82.3
2	50	139	95	48	148	99.3

旋启式内螺纹止回阀 尺寸列表 DIMENSION LIST

NPS	d	L	H
1/4	6	58	35
3/8	10	58	35
1/2	15	66	40
3/4	20	80	54
1	25	90	59
1-1/4	32	105	62.5
1-1/2	38	120	73
2	50	140	85

不锈钢内螺纹闸阀


Stainless steel threaded end gate valve

不锈钢内螺纹截止阀


Stainless steel threaded end globe valve



不锈钢内螺纹闸阀



不锈钢内螺纹截止阀



特点 FEATURE

全通径流量
产品规格从1/2"-3"
工作压力: 200PSI
内螺纹端可按BSPT, NPT, DIN2999制造

Full Bore
Size 1/2"to2"
Working Pressure:200PSI
Female Threaded End:BSPT,NPT,DIN2999

特点 FEATURE

全通径流量
产品规格从1/2"到2"
工作压力: 200PSI
内螺纹端可按BSPT, NPT, DIN2999制造

Full Bore
Size 1/2"to2"
Working Pressure:200PSI
Female Threaded End:BSPT,NPT,DIN2999

不锈钢内螺纹闸阀 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	CF8M CF8
2	阀板	Disc	CF8M CF8
3	密封圈	Seal Ring	SS316 SS316
4	卡簧	Snap Spring	316
5	弹垫	Washer	PTFE
6	杆	Stem	CF8M CF8
7	阀盖	Bonnet	SS316 SS304
8	填料	PTFE	PTFE
9	垫片	Gasket	PTFE
10	压盖螺母	Gland Nut	SS316
11	手轮	Handwheel	HT(C.R.)
12	螺母	Nut	SS316

不锈钢内螺纹截止阀 材料列表 MATERIAL LIST

No.	部件名称	Part Name	材料Material
1	阀体	Body	CF8M CF8
2	阀瓣	Disc	CF8M CF8
3	密封圈	Seal Ring	SS316 SS316
4	阀杆	Stem	SS316 SS304
5	填料	PTFE	PTFE
6	手轮	Handwheel	HT(C.R.)
7	阀盖	Bonnet	CF8M CF8
8	压盖螺母	Gland Nut	SS316
9	填料压盖	Packing Gasket	SS316
10	螺母	Nut	SS316

不锈钢内螺纹闸阀 尺寸列表 DIMENSION LIST


NPS	d	H	L	W
1/2	15	105	50	78
3/4	20	108	60	70
1	25	135	65	80
1-1/4	32	145	75	80
1-1/2	40	155	85	90
2	50	185	95	100

不锈钢内螺纹截止阀 尺寸列表 DIMENSION LIST

NPS	d	H	L	W
1/2	15	105	50	70
3/4	20	108	60	70
1	25	135	65	80
1-1/4	32	145	75	80
1-1/2	40	155	85	90
2	50	185	95	100

Q41 不锈钢法兰球阀

Stainless steel flanged ball valve

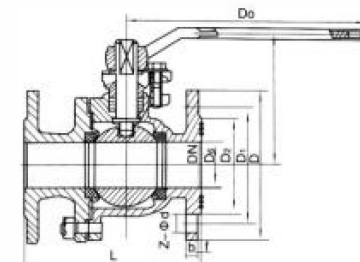

法兰球阀特点

产品规格: DN15-200
工作压力: 1.6/2.5/4.0/6.4MPa
工作温度: <150°C(PPL<300°C)
法兰标准按JB,也可按美标

FLANGE BALL VALVE FEATURES

Size:DN15-200
Working Pressure:1.6/2.5/4.0/6.4MPa
Working Temperature<150°C(PPL<300°C)
Flange Standard JB79 or ANSI B16.25

主要尺寸 MAIN DIMENSION

DN	L	D	D1	D2	H	B-f	Z-φd	DN
40	180	145	110	85	150	16-3	16-3	240
50	200	160	124	100	160	16-3	16-3	240
65	220	180	145	120	185	18-3	18-3	320
80	250	195	160	135	215	20-3	20-3	380
100	280	215	180	155	250	20-3	20-3	400
125	320	245	210	185	280	22-3	22-3	500
150	360	280	240	210	320	24-3	24-3	600
200	480	335	295	265	370	26-3	26-3	800

主要零件材料 MATERIAL FOR MAIN PARTS

零件名称	材料 Material	
Part name	Q41F-16P -25P, 40P	Q41F-16R -25R, 40R
阀体 Body	铬镍钛钢 Cr Ni Ti	铬镍钛钢 Cr Ni Mo Steel
球体 Ball		
阀杆 Stem		
密封圈 Seal ring	聚四氟乙烯 Polyterafuoroethylene	
扳手 Hand wheel	铸钢 Carbon steel	

主要尺寸 MAIN DIMENSIONS

型号	公称通径	尺寸(mm) Dimensions							
type	(DN) Nominal Diameter	L	D	D1	D2	H	b-f	Z-φd	Da
Q41F-16P (R)	15	130	95	65	45	60	14-2	4-14	108
	20	140	105	75	55	84	14-2	4-14	120
	25	150	115	85	65	90	16-2	4-14	165
	32	165	135	100	78	105	16-2	4-18	180
	40	180	145	110	85	150	16-3	4-18	240
	50	200	160	125	100	190	16-3	4-18	240
	65	220	180	145	120	195	18-3	4-18	320
	80	250	195	160	135	215	20-3	8-18	350
	100	280	215	180	155	250	20-3	8-18	400
	125	320	245	210	185	280	22-3	8-18	500
	150	360	280	240	210	320	24-3	8-23	600
	200	400	335	295	265	370	26-3	12-23	800

特点 FEATURE

连接形式: 螺纹、法兰、焊接、卡套、快换

材质为: SUS304、SUS316制成

管道质量控制: DN15-150及1/2"-6"

适用介质: 水、油、气体及与CF8M/CF8适宜的各种腐蚀性介质

Type: Screwed, Flanged, Welding


adlus table joint, Quick Coupling

Material Quality: SUS304, SUS316

Size: DN15-150&1/2"-6"


Applicable Mediums: WOG & Every kind of corrosive mediums suitable for CF8M/CF8

TYPE:A ADAPTOR FEMALE




SIZE	Inch	1/2	3/4	1	1-1/4	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150
E	14.3	21	23.8	30.8	46	58	73.2	98.2	149	
F	29.3	39.2	43.8	51.9	74.7	82.3	97.8	126.8	191	
H	24.3	32	38.8	45.5	63	78.9	91.5	119.5	175.9	
L	41.3	39	48.5	52.5	61.7	68	79	74.8	86	

TYPE:B COUPLER MALE




SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
A	68.4	116	125	181	189	199	210	254	282	409	
B	39.9	53.3	60.9	82.6	90.3	99.8	112.4	137.6	166.6	255	
C	34.9	41	47	58	65	75	91	108	140	198	
D	32.5	32	39	44.5	45.0	50.0	54.3	55.5	55.5	74	
E	14.3	19.0	25.0	36.6	39.0	50.8	63.0	76.2	100.8	146	
L	49.2	51	58	87.2	85.7	75.4	83.3	86.6	88.8	116	

TYPE:C COUPLER FEMALE



SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
A	68.4	116	125	181	189	199	210	254	282	409	
B	39.9	53.3	60.9	82.6	90.3	99.8	112.4	137.6	166.6	255	
C	34.9	41	47	58	65	75	91	108	140	198	
E	8.0	13.8	18.8	25.9	32.3	44.5	56.7	88	93.4	142	
I	14.0	21.0	27.0	33.7	40.1	52.7	68.3	79	104.4	157	
K	41.3	51	57	59	61	70	79	102	108	146	
L	84.9	82.8	95.2	102.5	104.0	129	142.3	157.1	163.5	214	

TYPE:D COUPLER FEMALE



SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
A	68.4	116	125	181	189	199	210	254	282	409	
B	39.9	53.3	60.9	82.6	90.3	99.8	112.4	137.6	166.6	255	
C	34.9	41	47	58	65	75	91	108	140	198	
D	32.5	32	39	44.5	45.0	50.0	54.3	55.5	55.5	74	
E	14.3	21	25.0	34.9	39.0	50.8	63.0	76.2	100.8	146	
L	49.2	51	61.8	87.5	87	72.2	83.3	86.5	88.8	114	

不锈钢快速接头系列

Stainless steel quick connector series

特点 FEATURE

连接形式: 螺纹、法兰、带颈、卡套、快接

材质为: SUS304、SUS316制成

管道流量控制: DN15~150及1/2"-6"

适用介质: 水、油、气体及与CF8M/CF8适宜的各种腐蚀性介质

Type: Screwed, Flanged, Welding

adjustable joint, Quick Coupling

Material Quality: SUS304, SUS316

Size: DN15~150 & 1/2"-6"

Applicable Mediums: WOG & Every kind of corrosive


mediums suitable for CF8M/CF8

TYPE:E ADAPTOR HSAE SHANK




SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
E	8.0	13.8	19.8	25.8	32.3	44.5	56.7	68	93.4	142	
H	24.3	32	38.6	45.5	53.4	63	75.9	91.5	119.5	175.9	
I	14.6	21.0	27.0	33.7	40.1	52.7	66.3	79	104.4	157	
J	38.2	35.0	38.0	48.0	55.4	65.3	79.5	93.5	121.5	187	
K	41.3	51	60	57	60	70	80	100	108	146	
L	86.5	86.3	105.8	109.5	113	138.5	149.5	166.6	174.5	224	

TYPE:F ADAPTOR MALE



SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
D	34.1	39.0	48.5	62.5	54	61.7	68	70	74.5	83	
E	14.3	21.3	23.6	30.8	38.5	46.7	56	73.2	98.2	149	
F	29.3	38.2	43.8	51.9	60.4	74.7	82.3	97.8	126.8	196	
H	24.3	32	36.6	45.5	53.4	63	75.9	91.5	119.5	175.9	
L	48.8	58	67.5	73.2	74.7	87.1	79	101	107.9	127	

TYPE:DC DUST CAP



SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
A	68.4	116	125	181	189	199	68	70	282	489	
B	39.9	83.3	60.9	82.6	90.3	99.8	58	73.2	165.6	255	
C	34.9	41	47	58	65	75	82.3	97.8	140	198	
G	9.5	10	12	11	12	12	75.9	91.5	12	16	
L	32.5	34.0	41.0	46.5	53.2	53.2	79	101	80.0	68	

TYPE:DP DUST PLUG



SIZE	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6
mm	15	20	25	32	40	50	65	80	100	150	
G	9.5	12	13	14	16	19	11	11	13	16	
H	24.3	32	36.5	45.5	53.4	63	75.9	91.5	119.5	175.9	
L	26	27.5	36.5	42	44.0	50.8	53	55.0	62.8	68	


Classic 经典, 永恒的品质

Eternal quality

您的要求, 是我们对产品质量细节的标准。



GB/T12459-2005、GB/T13401-92

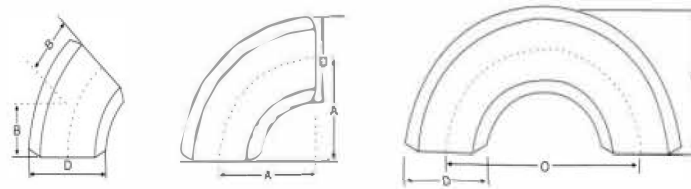


45° 弯头 45° Elbow 90° 弯头 90° Elbow 180° 弯头 180° Elbow

mm

公称通径 Nominal Pipe size DN	端面外径 Outside Diameter at Bevel D		中心至端面 Center to End			中心至中心 Center to Center		背面至端面 Back to Faces	
			45°弯头 Elbows	90°弯头 Elbows		180°弯头 Return		180°弯头 Return	
			B	A					
	A系列 Series A	B系列 Series B	长半径 Long Radius	长半径 Long Radius	短半径 Short Radius	长半径 Long Radius	短半径 Short Radius	长半径 Long Radius	短半径 Short Radius
15	21.3	18	16	38	—	76	—	48	—
20	26.9	25	16	38	—	76	—	51	—
25	33.7	32	16	38	25	76	51	56	41
32	42.4	38	20	48	32	95	64	70	52
40	48.3	45	24	57	38	114	76	83	62
50	60.3	57	32	76	51	152	102	106	81
65	73	76	40	95	64	191	127	132	100
80	88.9	89	47	114	76	229	152	159	121
90	101.6	—	55	133	89	267	178	184	140
100	114.3	108	63	152	102	305	203	210	159
125	141.3	133	79	190	127	381	254	262	197
150	168.3	159	95	229	152	457	305	313	237
200	219.1	219	126	305	203	610	406	414	313
250	273.0	273	158	381	254	762	508	518	391
300	323.9	325	189	457	305	914	610	619	467
350	355.6	377	221	533	356	1067	711	711	533
400	406.4	426	253	610	406	1219	813	813	610
450	457	478	284	686	457	1372	914	914	686
500	508	529	316	762	508	1524	1016	1016	762
550	559	—	347	838	559	1676	1118	1118	838
600	610	630	379	914	610	1829	1219	1219	914
650	660	—	410	991	660	注: GB/T12459-2005 尺寸范围 DN15-800 GB/T13401-92 尺寸范围 DN350-1200 Note: GB/T12459-2005 size range is DN15-800 GB/T13401-92 size range is DN350-1200			
700	711	720	442	1067	711				
750	762	—	473	1143	762				
800	813	820	505	1219	813				
850	864	—	537	1295	864				
900	914	920	568	1372	914				
950	965	—	600	1448	965				
1000	1016	1020	631	1524	1016				
1050	1067	—	663	1600	1067				
1100	1118	1120	694	1676	1118				
1150	1168	—	726	1753	1168				
1200	1220	1220	758	1829	1219				

GB/T12459-2005、GB/T13401-92

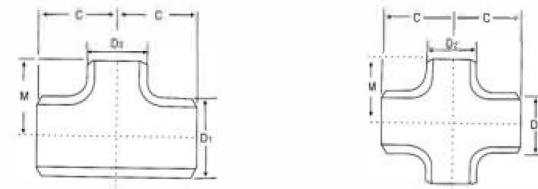

异径三通
Reducing Outlet Tee

异径四通
Reducing Outlet Cross

mm

公称通径 Nominal Pipe size DN	端面外径 Outside Diameter at Bevel				中心至端面 Center to End	
	D1		D2		C	M
	A系列 Series A	B系列 Series B	A系列 Series A	B系列 Series B		
	A系列 Series A	B系列 Series B	A系列 Series A	B系列 Series B	C	M
20×15	26.9	25	21.3	18	29	29
25×20	33.7	32	26.9	25	38	38
25×15	33.7	32	21.3	18	38	38
32×25	42.4	38	33.7	32	48	48
32×20	42.4	38	26.9	25	48	48
32×15	42.4	38	21.3	18	48	48
40×32	48.3	45	42.4	38	57	57
40×25	48.3	45	33.7	32	57	57
40×20	48.3	45	26.9	25	57	57
40×15	48.3	45	21.3	18	57	57
50×40	60.3	57	48.3	45	64	60
50×32	60.3	57	42.4	38	64	57
50×25	60.3	57	33.7	32	64	51
50×20	60.3	57	26.9	25	64	44
65×50	73	76	60.3	57	76	70
65×40	73	76	48.3	45	76	67
65×32	73	76	42.4	38	76	64
65×25	73	76	33.7	32	76	57
80×65	88.9	89	73	76	86	83
80×50	88.9	89	60.3	57	86	76
80×40	88.9	89	48.3	45	86	73
80×32	88.9	89	42.4	38	86	70
90×60	101.6	—	88.9	—	95	92
90×65	101.6	—	73	—	95	89
90×50	101.6	—	60.3	—	95	83
90×40	101.6	—	48.3	—	95	79


公称通径 Nominal Pipe size DN	端面外径 Outside Diameter at Bevel				中心至端面 Center to End	
	D1		D2		C	M
	A系列 Series A	B系列 Series B	A系列 Series A	B系列 Series B		
	A系列 Series A	B系列 Series B	A系列 Series A	B系列 Series B	C	M
100×90	114.3	—	101.6	—	105	102
100×80	114.3	108	88.9	89	105	98
100×5	114.3	108	73	76	105	95
100×50	114.3	108	60.3	57	105	89
100×40	114.3	108	48.3	45	105	86
125×100	141.3	133	114.3	108	124	117
125×90	141.3	—	101.6	—	124	114
125×80	141.3	133	88.9	89	124	111
125×65	141.3	133	73	76	124	108
125×50	141.3	133	60.3	57	124	105
150×125	168.3	159	139.7	133	143	137
150×100	168.3	159	114.3	108	143	130
150×90	168.3	—	101.6	—	143	127
150×80	168.3	159	88.9	89	143	124
150×65	168.3	159	73	76	143	121
200×150	219.1	219	168.3	159	178	166
200×125	219.1	219	139.7	133	178	162
200×100	219.1	219	114.3	108	178	156
200×90	219.1	219	101.6	—	178	152
250×200	273.0	273	219.1	219	216	208
250×150	273.0	273	168.3	159	216	194
200×125	273.0	273	139.7	133	216	191
200×100	273.0	273	114.3	108	216	184
300×250	323.9	325	273.0	273	254	241
300×200	323.9	325	219.1	219	254	229
300×150	323.9	325	168.3	159	254	219

特点 FEATURE

连接形式: 焊接式、快装式、螺纹式
材质为: SUS304、SUS316L制成
管道流量控制: DN25-DN150及1"-6"
应用于不锈钢管路系统


Type: Welded, Quick-install, Threaded
Material: quality-SUS304, SUS316L
Flux domination of pipeline
Size: DN25-DN150 & 1"-6"
Applied to the stainless steel pipeline system

快装弯头 Clamp




SIZE	φ	A	B	C
1"	25.4	50.5(34)	22.4	55
1 1/4"	31.8	50.5	28.8	60
1 1/2"	38.1	50.5	35.1	70
2"	50.8	64	47.8	82
2 1/2"	63.5	77.5	59.5	105
3"	76.2	91	72.2	110
3 1/2"	88.9	106	84.9	125
4"	101.6	119	97.6	148

快装三通 Clamp/tee




SIZE	A	B	C
1"	50.5(34)	22.4	55
1 1/4"	50.5	28.8	60
1 1/2"	50.5	35.1	70
2"	64	47.8	82
2 1/2"	77.5	59.5	105
3"	91	72.2	110
3 1/2"	106	84.9	125
4"	119	97.6	148

焊接弯头 Welded elbow



SIZE	A	D
1"	33.5	25.4
1 1/4"	38	31.8
1 1/2"	48.5	38.1
2"	60.5	50.8
2 1/2"	68.5	63.5
3"	88.5	76.2
3 1/2"	103.5	88.9
4"	127	101.6
5"	175	133
6"	214	159

焊接三通 Welded tee



公称直径	L	D
10	26	12
15	35	18
20	40	22
25	50	28
32	55	34
40	60	40
50	70	52
65	80	70
80	90	85
100	100	104
125	187	129
150	225	154


特点 FEATURE

连接形式: 焊接式、快装式、螺纹式
材质为: SUS304、SUS316制成
管道流量控制: DN15-150及1"-6"
应用于不锈钢管路系统

Type: Welded, Clamp, Threaded
Material: SUS304, SUS316L
Flux domination of pipeline
Size: DN25-DN150 & 1"-6"
Applied to the stainless steel pipeline system


快装蝶阀 Clamp butterfly valve

(工业标准有: ISO、DIN、IDF、3A、SMS等)




规格(ISO)	A	B	D	L	H
20	66	78	50.5	130	82
25	66	78	50.5	130	82
32	66	78	50.5	130	82
38	70	88	50.5	130	86
51	78	102	64	140	96
63	98	115	77.5	150	103
76	98	128	81	150	110
89	102	139	106	170	116
102	106	154	119	170	122
108	106	159	119	170	126
133	140	185	145	190	138
159	260	215	172	190	153

三片式蝶阀 Three-pieces butterfly valve




规格(ISO)	A	B	D	L	H
20	100	78	19.05	130	82
25	100	78	25.4	130	82
32	100	78	31.8	130	82
38	100	88	38.1	130	86
51	104	102	50.8	140	96
63	112	115	63.5	150	103
76	112	128	76.1	150	110
89	120	139	88.9	170	116
102	128	154	101.6	170	122
108	128	159	108	170	126
133	160	185	133	190	138
159	180	215	159	190	153

三通式快装手动球阀 Three-way Type Clamp Ball Valve



SIZE	A	D	B	L
3/4"	19	50.5	47.5	95
1"	25.4	50.5	60	120
1 1/4"	32	50.5	65	130
1 1/2"	38	50.5	70	140
2"	51	64	85	170
2 1/2"	63.5	77.5	95	190
3"	76.3	91	105	210
3 1/2"	89	106	110	220
4"	101.6	119	120	240

隔膜阀 Diaphragm valve



规格(DN)	A	B	L
15	108	34	88/99
20	118	50.5	91/102
25	127	50.5	118/123
32	146	50.5	129/136
40	159	50.5	138/159
50	191	64	159/186



Global Solutions, Direct to Your Business

joseph@globalsourcingdirect.us



凸面平焊法兰
Carvex welded flange



JB/T82-94对焊法兰
JB/T82-94 welded flange



国际、美标带颈平焊法兰
GB、American standard with
a neck flat welding flange



HG200600 P/J/R/J
松套平焊法兰(活动法兰)
Loose set of flat welding flange



盲盖凸面法兰
Blind convex flange



JB/T86-94
平焊法兰
Flat welding flange