
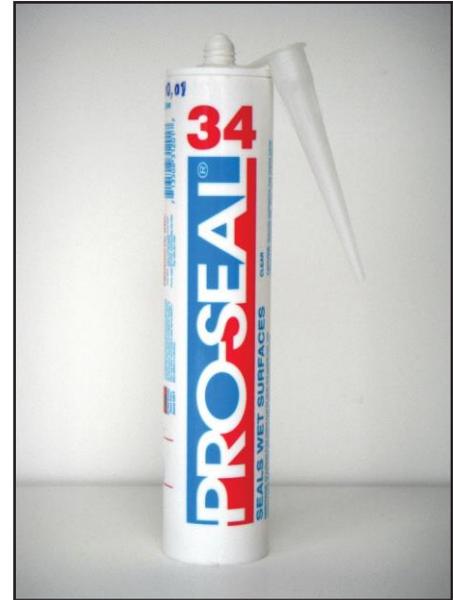
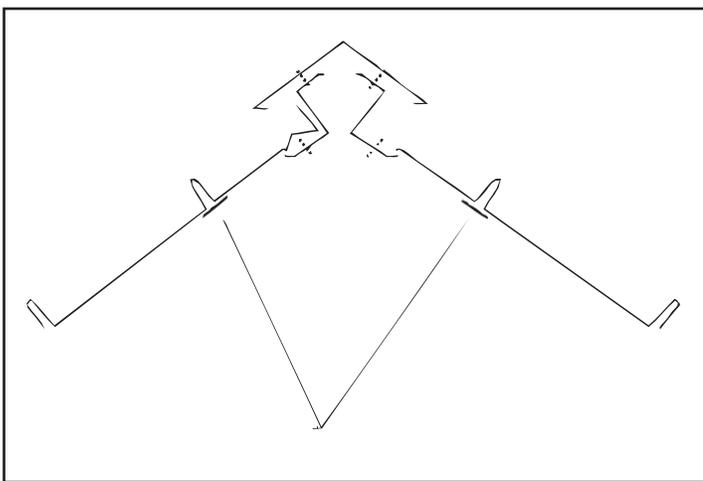


**Pro-Seal 34** has been specified and highly recommended by most of the largest sheet metal manufacturers across the United States as a cheap insurance policy and a valued addition to the roof. Pro-Seal 34 can be applied in damp, standing water and oily areas. The application temperatures range from -70°F to +220°F. Pro-Seal 34 has no memory so you will never lose a true seal.

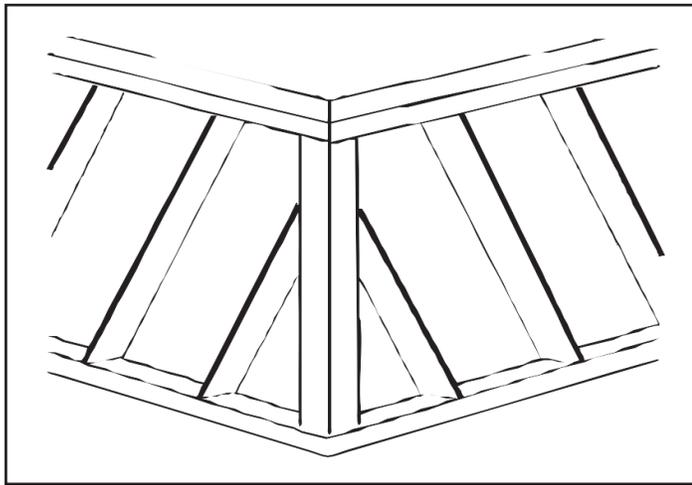

## Hip Application

A hip installation is very similar to an optional ridge installation. The only practical difference is that the roof panel must be cut at an angle to match the roof hip. Depending on the roof slope, the panel edge may or may not have to be turned up; the ends of the ribs should be caulked closed with Pro-Seal 34. Using Pro-Seal 34 increase the roof's efficiency and longevity while sealing your seams.