



# Light Bar Installation Instructions


CONTENTS OF KIT:



Light Bar



4 Pushpins

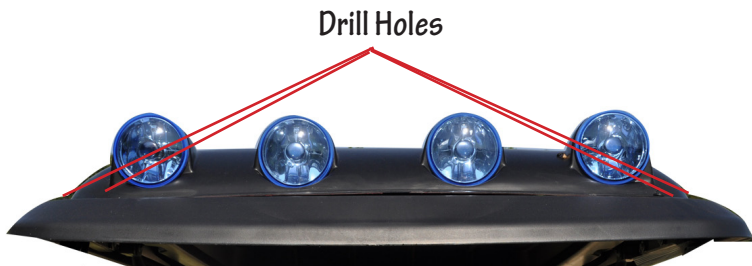

Drill Holes

1. Position Light Bar on front center of vehicle canopy. Using holes on base of Light Bar as a guide, drill four 5/16" holes in canopy.

2. Using location of the light bar wire housing, drill a 1/2" hole in canopy. String wire loom through hole and run down vehicle strut.



Step 2

3. Attach Light Bar to vehicle canopy using Pushpins.



Step 3



Step 4

4. Run wire loom behind dash assembly.

5. Drill hole in dash slightly larger than switch and install switch. Run black wire to a good ground (12 volt)\*† and the red wire to a 12 volt\* source.



Step 5

\*Wiring to source other than 12 volts will damage light.  
†Kit may require 12 volt reducer.

