

Lumaris Tunable White Tape Light

The Lumaris tape light takes scene control to the next level, offering a simple and seamless way to add tunable white accent lighting to Lutron connected home projects.

Built on the ultra-reliable Lutron Clear Connect–Type X wireless technology, the Lumaris tape light is a native component within the Lutron platform including controls, apps, programming software, and Lutron Connect cloud services.

A complete Lumaris tape light solution consists of field-cut tunable white LED tape, a wireless controller with integrated LED drivers, high-reliability punch connectors, dedicated wiring, and a plug-in power supply. Aluminum mounting channel and lens for LED tape sold separately by others.


Features

Lighting System


- Seamless integration with HomeWorks QSX and RadioRA 3
- User programmable intensity and color temperature presets
- Warm dim to mimic the dimming curve of an incandescent lamp
- Automatically changes color temperature based on time of day
- Manual adjustments via the app or integration

Wireless Controller (with plug-in power supply)


- Continuous, flicker-free dimming from 100% down to 0.1% of measured light output¹
- 32 W rated load (16.4 ft [5 m] of LED tape)
- 50,000 hours rated lifetime²
- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C)
- Uses Clear Connect–Type X wireless communication
- Output short-circuit and overload-protection
- Low-profile, easy to hide
- Barrel connector for easy installation

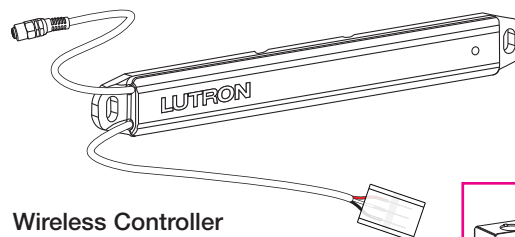


Wireless Controller

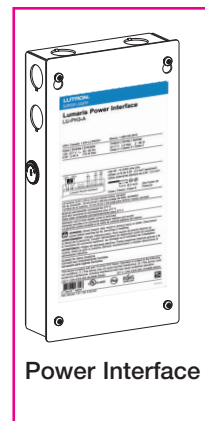

Power Interface



Power Supply



LED Tape

LED Tape

- 2-channel tunable white
- Two color temperature ranges available:
 - Soft White: 1800 K – 3000 K
 - Daylight: 2500 K – 5000 K
- 90+ CRI (color rendering index)
- 3 step MacAdam ellipse (SDCM)
- Lumen output: 200 lumens per foot typical
- Luminous efficacy: 100 lumens per watt typical
- Power consumption: 1.8 W per foot typical
- Rated life: L70 – 50,000 hours
- 2 in (50.8 mm) cuttable segments
- Strong VHB adhesive
- Indoor damp/dry location rated
- Wardrobe closet rated

¹ Tunable white performance is maintained from 100% to 1%.

² Plug-in power supply lifetime is rated for 50,000 hours in up to a 77 °F (25 °C) ambient temperature. Increasing ambient temperature may degrade lifetime.

Lumaris Tunable White Tape Light

Features (continued)

Power Interface

- Powers up to 3 Lumaris controllers and 48 feet of Lumaris LED tape.
- Protected from miswires of input power.
- Rated lifetime of 50,000 hours at 40 C (104 F) ambient temperature and maximum loading.
- FCC Part 15
 - Class A (277 V~)
 - Class B (120 V~)
- Inrush limiting allows full loading of circuit breakers without nuisance tripping.
- 100% end-of-line performance tested at a Lutron factory.
- RoHS compliant.
- Restores all settings after power failure.
- Barrier provided for Class 2 separation in the wiring compartment.
- Redundant connections on line terminals for easy daisy chain wiring.
- Redundant connections on output terminals allow for easy wiring of two LED tape home runs.
- Class 2 output designed to withstand hot swap.
- Provided with 3 barrel to terminal adapters

Lumaris Tunable White Tape Light

Model Numbers

| Model Number | | Description |
|---------------|-------------|--|
| HomeWorks QSX | RadioRA 3 | |
| HWL-TLK-SW | RRL-TLK-SW | Soft White Kit <ul style="list-style-type: none"> • Wireless controller (with plug-in power supply) • Soft white LED tape (1800 K - 3000 K) - 16.4 ft (5 m) reel • Wire/tape connectors (qty. 5) • 3 conductor cable - 10 ft (3 m) |
| HWL-TLK-DL | RRL-TLK-DL | Daylight Kit <ul style="list-style-type: none"> • Wireless controller (with plug-in power supply) • Daylight LED tape (2500 K - 5000 K) - 16.4 ft (5 m) reel • Wire/tape connectors (qty. 5) • 3 conductor cable - 10 ft (3 m) |
| HWL-TWC-WH | RRL-TWC-WH | Wireless controller (including power supply) |
| HWL-TWCL | RRL-TWCL-WH | Wireless controller |
| LU-T05-SW | | Soft white LED tape (1800 K - 3000 K) - 16.4 ft (5 m) reel |
| LU-T05-DL | | Daylight LED tape (2500 K - 5000 K) - 16.4 ft (5 m) reel |
| LU-T30-SW | | Soft white LED tape (1800 K - 3000 K) - 98.4 ft (30 m) reel |
| LU-T30-DL | | Daylight LED tape (2500 K - 5000 K) - 98.4 ft (30 m) reel |
| LU-CK1-TW | | Wire/tape connectors (qty. 10) |
| LU-MK1 | | Mounting clips (qty. 20) |
| LU-BP1 | | Barrel to terminal adapter (Qty. 3) |
| LU-WK1-TW | | 3 x 22 AWG (0.50 mm ²) cable - 50 ft (15.2 m) |
| LU-PH3-A | | Power Interface with 3 barrel to terminal adapters |
| T120-24DC-15 | | 36 W plug-in power supply |

NOTE: Aluminum mounting channel and lens for LED tape sold separately by others.

Lumaris Tunable White Tape Light

Specifications

Lighting System

Regulatory Approvals

- Power Supply
 - cULus Listed for USA and Canada
 - FCC Part 15 Class B compliant
 - ICES-003 compliant
 - US DoE Level VI compliant
 - Limited Power Supply
- Wireless Controller
 - cULus Listed for USA and Canada
 - FCC Part 15 Class B & C compliant
 - ICES-003 compliant
- Tunable White LED Tape
 - cULus Listed for USA and Canada
 - Indoor damp/dry location rated
 - Wardrobe closet rated
 - FCC Part 15 Class B compliant
 - ICES-003 compliant
- Soft White/Daylight Kit (HWL-TLK-DK, HWL-TLK-SW, RRL-TLK-DL, RRL-TLK-SW)
 - When combined, the wireless controller and either of the Tunable White LED tapes comply with California Title 24 requirements as detailed in Reference Joint Appendix JA8 for High Luminous Efficacy Light Sources

Electrical

- Power Supply
 - Input: 100–240 V~ 50/60 Hz 1 A max
 - Output: 24 V== 1.5 A
- Wireless Controller
 - Input: 24 V== 1.5 A
 - Output: 24 V== 1.33 A 32 W max

Warranty

- The warranty will not cover issues caused by use of incompatible devices (including non-Lutron LED tape and/or power supplies).

Power Interface

Regulatory Approvals

- cULus Listed for USA and Canada
- FCC Part 15
 - Class A (277 V~)
 - Class B (120 V~)
- Meets ANSI C62.41 category A surge protection standards up to and including 4 kV
- Meets ULR 8750/CSA C22.2 No. 250.13-14, “Light Emitting Diode (LED) Equipment For Use in Lighting Products”
- Class 2 output; meets ULR 1310/CSA C22.2 No. 223-M91

Performance

- Operating Voltage: 120 V~/277 V~ 50/60 Hz
- Rated lifetime of 50,000 hours at 40 C° (104 F°) ambient temperature and maximum loading
- For rated warranty, ambient temperature (ta) not to exceed 40 C° (104 F°) (maximum rated temperature)
- Patented thermal fold back protection
- Non-volatile memory restores all driver settings after power failure
- Typical standby power consumption: 0.25 W at 120 V~ and 0.4 W at 277 V~
- Open-circuit protected output
- Short-circuit and overload-protected output
- Output: 24 V== constant voltage at high-end
- Output Load Range: 2 W to 96 W at high-end
- Power Factor: > 0.90 at maximum power
- NEMA 410 – 2011 compliant
- Inrush Current Limiting Circuitry: decreases circuit breaker tripping, switch arcing and relay failure; allows full loading of switch leg

Lumaris Tunable White Tape Light

Specifications *(continued)*

Power Interface *(continued)*

Environmental

- Sound rated: Class A inaudible in 24 dBA ambient
- Relative Humidity: maximum 90% non-condensing
- Minimum Operating Ambient Temperature:
ta = 0 C° (32 F°)¹
- Indoor use only
- Rated for dry and damp locations
- Meets NEC® requirements for installation in “other space used for environmental air”²
- Meets the Canadian National Building Code Plenum Requirements for a concealed space used as a plenum within a floor or roof assembly
- Maximum heat output of module: 46 BTU/hour


¹ Where ta is the temperature of the air directly surrounding the driver.

² Additional considerations may be required based on state and local codes and standards.

Lumaris Tunable White Tape Light

Wiring

Plug-in Power Supply

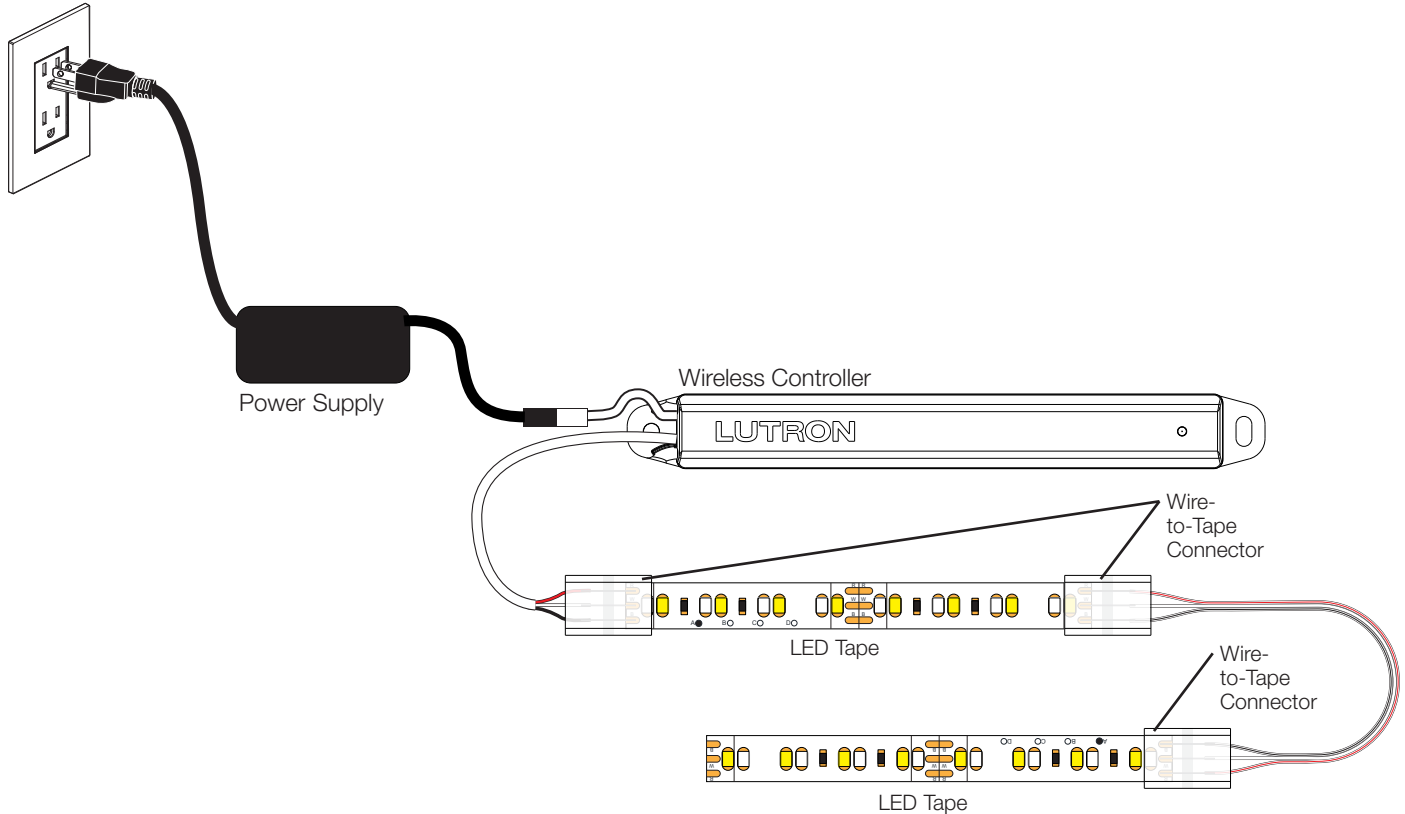

- The length of the 24 V_{DC} cable coming from the power supply may be extended by adding cable of the appropriate gauge (from the table below) to account for the distance. The wireless controller and power supply have 5.5 mm x 2.1 mm barrel connectors.

| Maximum Wire Length from the Power Supply to the Wireless Controller: ft (m) | | | | |
|--|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|
| 12 AWG (4.0 mm ²) | 14 AWG (2.5 mm ²) | 16 AWG (1.0 mm ²) | 18 AWG (0.75 mm ²) | 20 AWG (0.50 mm ²) |
| 42.5 (13) | 26.5 (8) | 17 (5.2) | 10.5 (3.2) | 6.5 (2) |

- Maximum amount of cable allowed on the output of wireless controller is 10 ft (3.0 m). The cable can be added to the beginning or can be used to break up segments of LED tape.
- 3 x 22 AWG (0.50 mm²) stranded cable is provided with the tape light kit or it can be ordered as Lutron P/N LU-WK1-TW.
- For every wire-to-tape connector that is used on the output of a wireless controller, beyond 6, the maximum length of cable allowed is reduced by 6 in (152.4 mm).
- Maximum length of LED tape light is 16.4 ft (5 m) total, regardless of whether LED tape is in a single segment or broken up by cables.

Lumaris Tunable White Tape Light


Wiring (continued)

Power Interface Wiring - Multi-zone wireless controller wiring

- Powers up to 3 Lumaris wireless controllers and 48 ft (14.6 m) of Lumaris LED tape.
- Power interface is grounded by terminal connection
- ~~Terminal blocks on the power interface and barrel to terminal adapter, accept solid or stranded wire per terminal from 20 AWG to 12 AWG (0.50 mm² to 4.0 mm²).~~
- Maximum wire length between the power interface and the start of the LED tape for different wire sizes is listed below.
- All LED + and LED - wires from the wireless controllers must be homerun back to the LU-PH3-A power interface for proper operation

| Maximum Wire Length from Power Interface to the Wireless Controller: ft (m) | | | | |
|---|-------------------------------|-------------------------------|--------------------------------|--------------------------------|
| 12 AWG (4.0 mm ²) | 14 AWG (2.5 mm ²) | 16 AWG (1.0 mm ²) | 18 AWG (0.75 mm ²) | 20 AWG (0.50 mm ²) |
| 75 (22.9) | 50 (15.2) | 30 (9.1) | 20 (6.1) | 10 (3.0) |

- Wiring information is based on a Lumaris power interface controlling 3 Lumaris wireless controllers, each with 16.4 ft (5 m) of LED tape. Contact Lutron if longer wire runs are required.

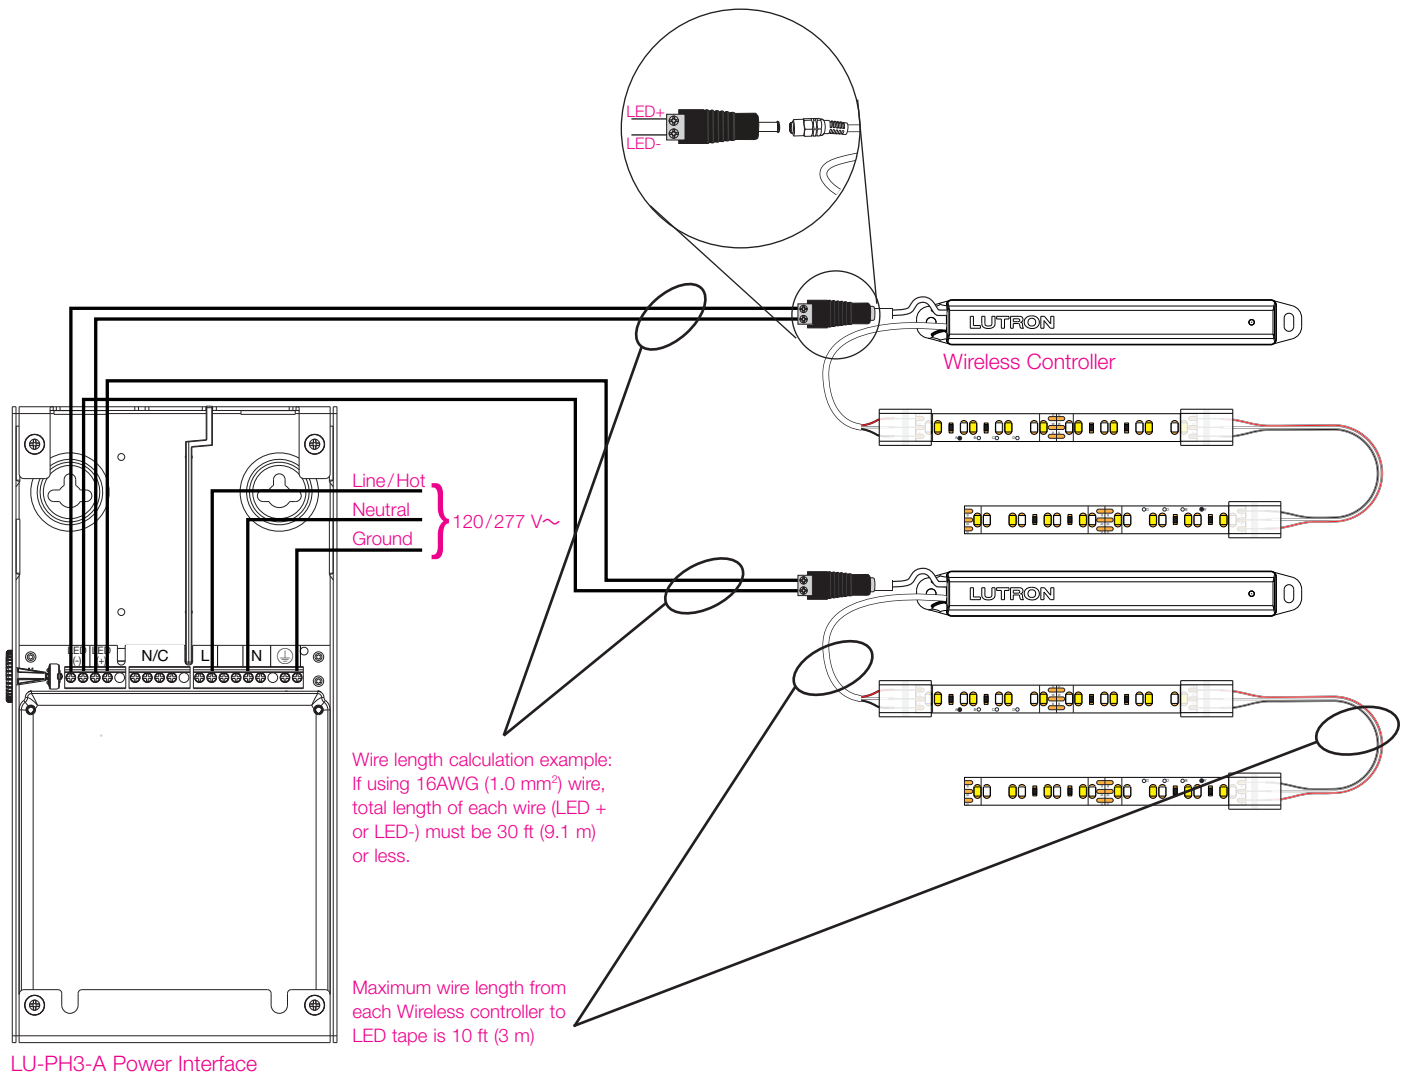


Lumaris Tunable White Tape Light

Wiring (continued)

Power Interface Wiring - Single zone wireless controller wiring

- Powers up to 3 Lumaris wireless controllers and 48 ft (14.6 m) of Lumaris LED tape.
- Power interface is grounded by terminal connection
- ~~Terminal blocks on the power interface and barrel to terminal adapter, accept solid or stranded wire per terminal from 20 AWG to 12 AWG (0.50 mm² to 4.0 mm²).~~
- Maximum wire length between the power interface and the start of the LED tape for different wire sizes is listed below.
- If wiring wireless controllers in a single zone application, LED+ and LED- low voltage wires can be T-tapped or can be homerun back to the power interface. Either wiring method is acceptable.

| Maximum Wire Length from Power Interface to the Wireless Controller: ft (m) | | | | |
|---|-------------------------------|-------------------------------|--------------------------------|--------------------------------|
| 12 AWG (4.0 mm ²) | 14 AWG (2.5 mm ²) | 16 AWG (1.0 mm ²) | 18 AWG (0.75 mm ²) | 20 AWG (0.50 mm ²) |
| 75 (22.9) | 50 (15.2) | 30 (9.1) | 20 (6.1) | 10 (3.0) |

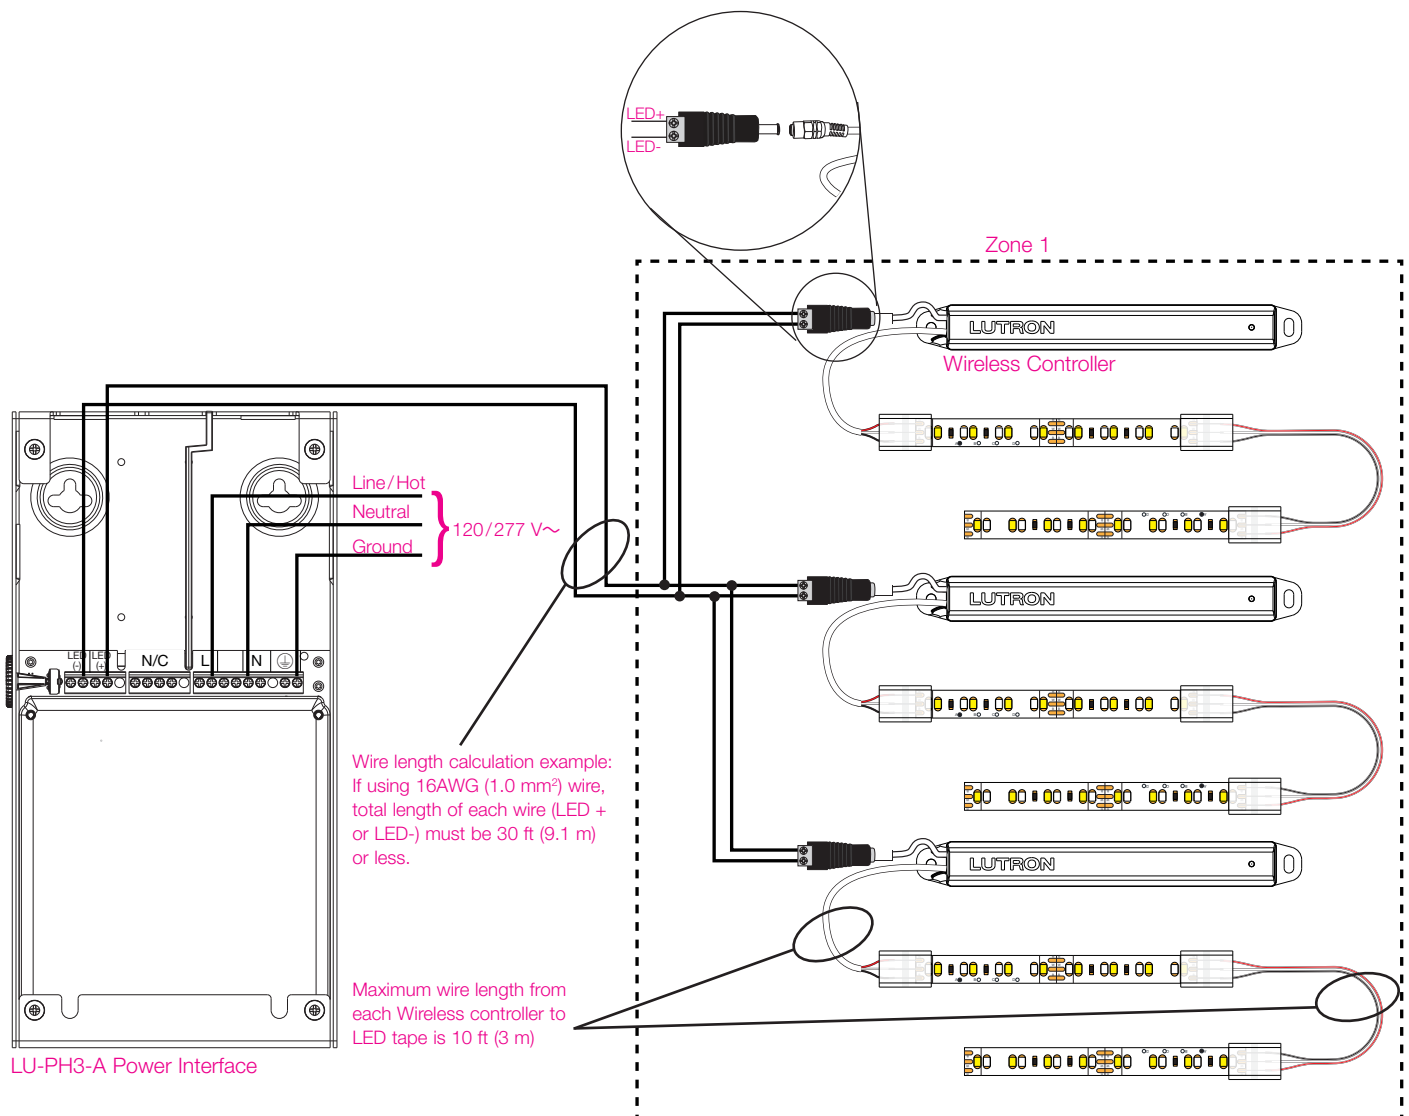

Lumaris Tunable White Tape Light


Dimensions

All dimensions shown as: in (mm)


Wireless Controller (HWL-TWC-WH, RRL-TWC-WH, HWL-TWCL-WH and RRL-TWCL-WH)

Top View

End View

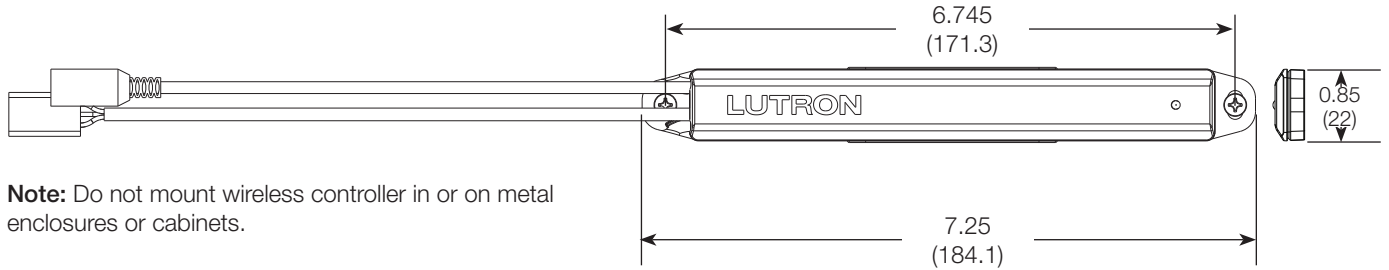


Side View

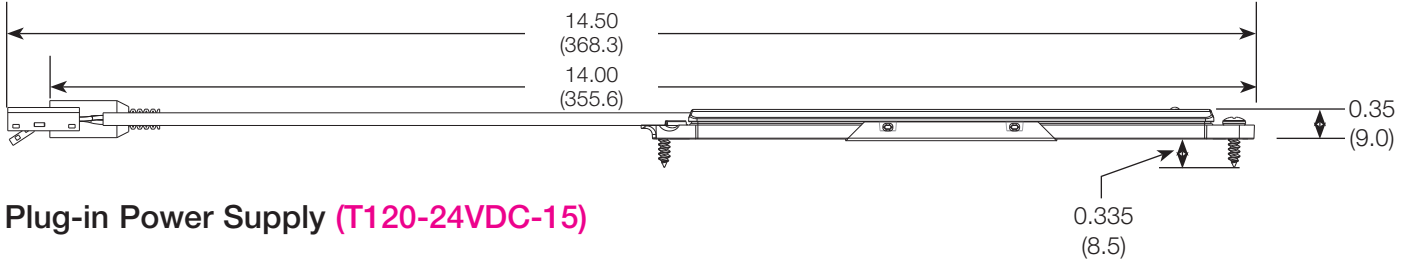


Plug-in Power Supply (T120-24VDC-15)


Top View

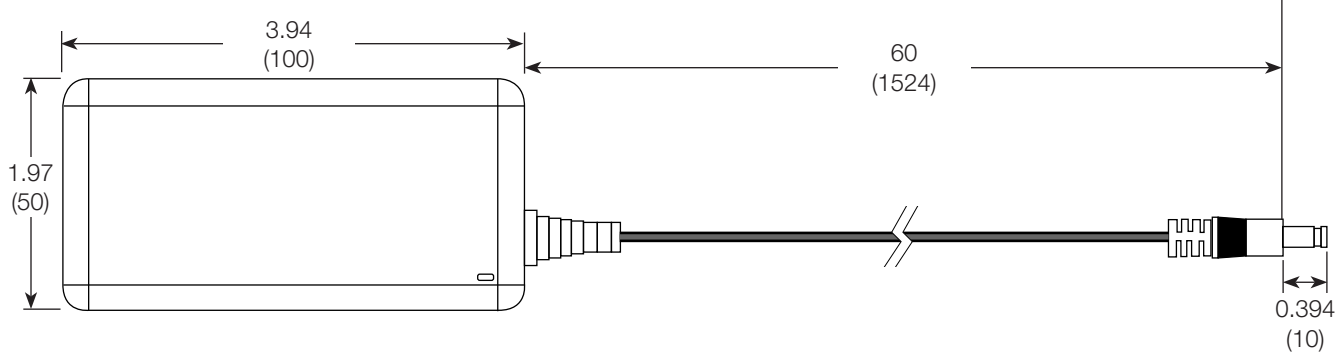

Side View

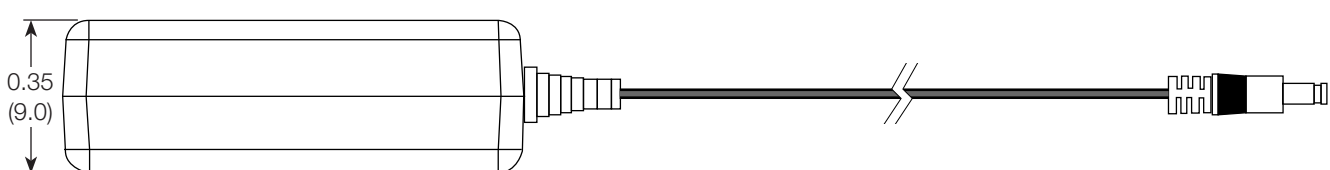

Power Cord

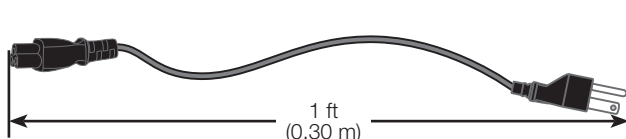


Lumaris Tunable White Tape Light


Dimensions *(continued)*

All dimensions shown as: in (mm)


Wireless Controller Mounting Bracket

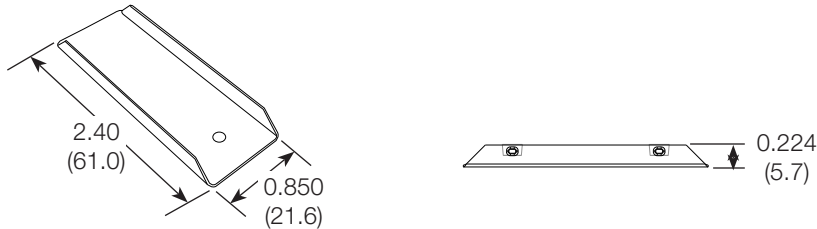


Wireless Controller Mounting Screw

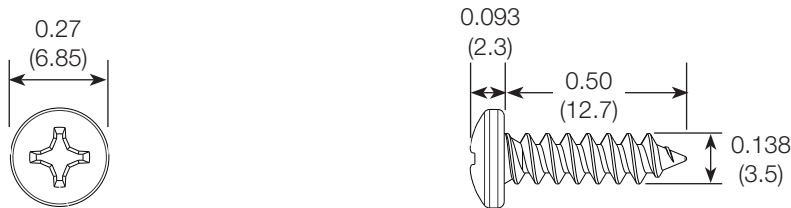


Wire-to-Tape Connector (LU-CK1-TW)

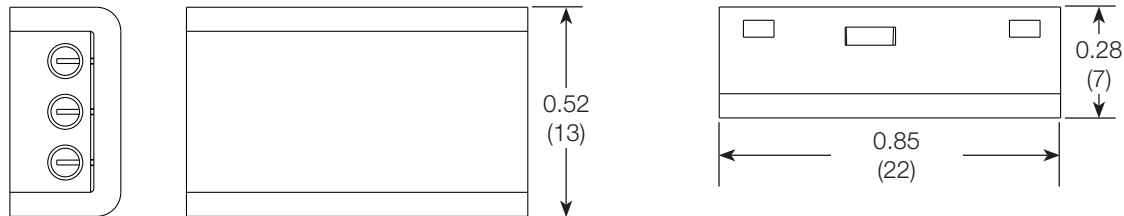


LED Tape (LU-T05-SW or LU-T05-DL , LU-T30-SW, LU-T30-DL)

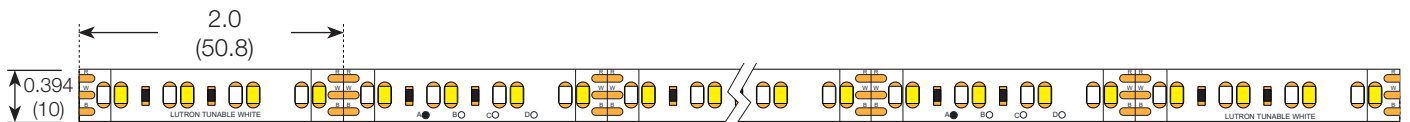

Mounting Clip (LU-MK1)




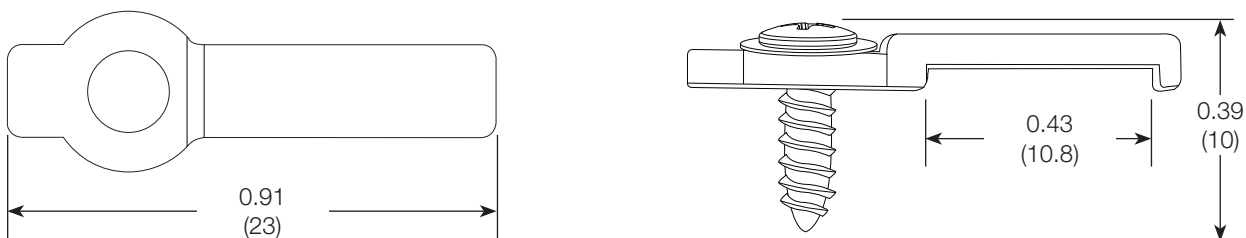


Power Interface Enclosure

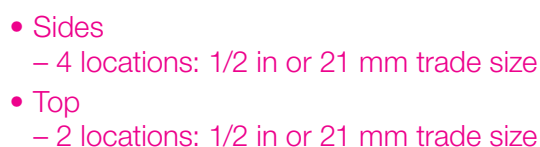

Lumaris Tunable White Tape Light

Mounting Options - Power Interface Enclosure^{1,2}

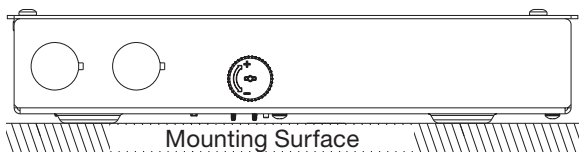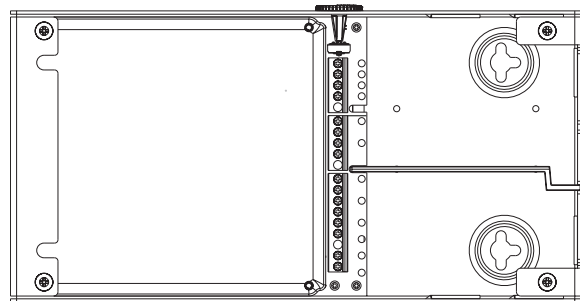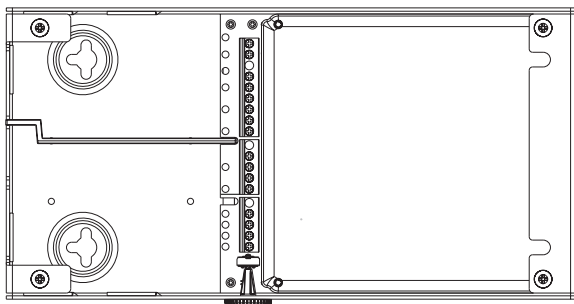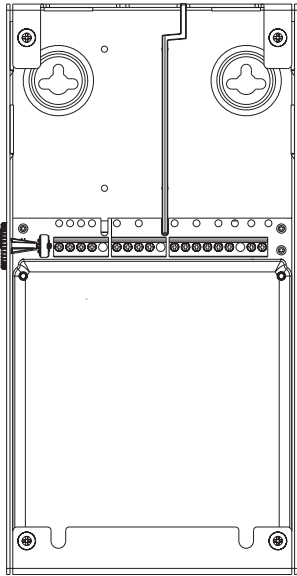

¹ Any other mounting configuration will require additional mechanical support. Improper installation may result in hazards to personnel or property.

² Mount the power interface in a position where it can be easily located and accessed if service or troubleshooting is necessary.

The Lutron logo, Lutron, Clear Connect, HomeWorks, Lutron Connect, Lumaris, and RadioRA 3 are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

All product names, logos, and brands are property of their respective owners.