


#### \*\*IMPORTANT - THIS ADAPTER WILL ONLY FIT THE ORIGIANL STARLINK MOUNT

#### (THUMB SCREW VERSION) AS SHOWN IN THE PHOTOS\*\*

- Remove the existing Vision Plus Pole from your caravan or motorhome and unscrew the locking screw connecting the Aerial Antenna so it can be removed.
- Unscrew the locking screw at the bottom of the Vision Plus Pole to remove the existing End Cap.
- Feed the Starlink power cable and network cable through the new End Cap into the Vision Plus Pole, or if you are using a POE Adapter connect your network cable first and fit the POE adapter inside the Vision Plus Pole.
- Feed network cable and if required the power cable up through the Vision Plus Pole and then through the Adapter fitting.



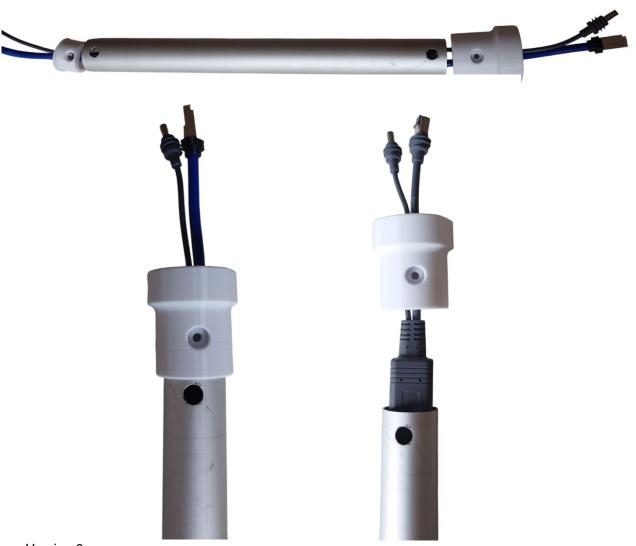

 Push the Adapter Fitting onto the end of the Vision Plus Pole and align the hole in the Vision Plus Pole with the fully encapsulated stainlesssteel nut hole inside the Adapter.



 Push the New End Cap on to the bottom end of the Vision Plus Pole and align the hole in the Vision Plus Pole with the hole showing the encapsulated stainless-steel nut inside the New End Cap.





Replace and tighten both locking screws holding the Adapter and New End Cap.



• Do not over tighten the locking screws as this can damage the encapsulated nuts.



• Feed the Starlink power cable and network cable through the Starlink Pole Mount and connect the cables to the Starlink Mini.





• Clip the Starlink Mount into the Starlink Mini.





• Fit the Vision Plus Pole Adapter into the Starlink Mini mount and tighten up the thumb screw on the Mini Mount until the Vision Plus Pole is secure.





• Fit the Vision Plus Pole back into your Caravan or Motorhome.



• Adjust the positing of the Starlink by twisting the Vison Plus Pole in the usual way.





• It is advised that you lower and remove the Starlink before travel, to protect the Starlink from damage during transit.